LineaPro

BINA COMPANY

Project:	Type:	Qty:



LineaPro Series

High-Performance Architectural Linear Luminaires

LineaPro is an IP66-rated family of high-performance linear luminaires designed for exterior architectural lighting. Engineered for AC line voltage operation, the series offers multiple optical distributions, four standard lengths, and an optional anti-glare louver to ensure precise, comfortable, and visually refined illumination. Ideal for façades, landscapes, commercial exteriors, and public spaces.

IP66-rated | multiple choice | Uniform illumination



UNITONE



DYNAMIC WHITE



VARICOLOR

RATINGS

5 YEAR WARRANTY | Intertek | IP 66

Order Code

ORDER CODE EXAMPLE: LPUT-45W-40K-35D-W-DM-UNV-MA*

SERIES	SERIES	CCT	BEAM ANGLE	FINISH	DIMMING	FINISH	ACCESSORIES
LPUT	16.14″ (20W) 23.82″ (30W) 35.43″ (45W) 46.85″ (60W)	**27K** 2700K **30K** 3000K **40K** 4000K **65K** 6500K **TW** Tunable White 2700K-6500K **WD** Warm Dim 3000K-1800K	**20D** 20 Degree **25D** 25 Degree **35D** 35 Degree **20*50D** 20*50 Degree	**B** Black **W** White **GR** Grey	**DM** DMX **RM** RDM **PP** Pixel per **FT** Foot	**120V** 120V only **UNV** 100-277V	**MA*** Mounting accessories, specify option(A–E) **AG*** Anti-glare accessories, specify option A,B or C.
LPVC	16.14″ (20W) 23.82″ (30W) 35.43″ (45W) 46.85″ (60W)	**27K** 2700K **30K** 3000K **40K** 4000K **65K** 6500K **TW** Tunable White 2700K-6500K **WD** Warm Dim 3000K-1800K	**10D** 10 Degree **30D** 30 Degree **60D** 60 Degree **10*50D** 10*50 Degree	**B** Black **W** White **GR** Grey	DMX **DM** RDM **RM** Pixel per **PP** Foot **FT**	**120V** 120V only **UNV** 100-277V	**MA*** Mounting accessories, specify option (A–E) **AG*** Anti-glare accessories, specify option A,B,or C.
LPDY	16.14″ (20W) 23.82″ (30W) 35.43″ (45W) 46.85″ (60W)	**27K** 2700K **30K** 3000K **40K** 4000K **50K** 5000K **57K** 5700K **60K** 6000K **TW** Tunable White 2700K-6500K **WD** Warm Dim 3000K-1800K	**8D** 8 Degree **15D** 15 Degree **30D** 30 Degree **15*40D** 15*40 Degree	**B** Black **W** White **GR** Grey	DMX **DM** RDM **RM** Pixel per **PP** Foot **FT**	**120V** 120V only **UNV** 100-277V	**MA*** Mounting accessories, specify option (A–E) **AG*** Anti-glare accessories, specify option A,B,or C.

In an effort to offer the best product possible, we reserve the right to change product specifications or materials without notice.

info@binacompany.com
305.735.3114
www.binacompany.com

5 YEAR WARRANTY | Intertek

LineaPro

BINA COMPANY


Project:	Type:	Qty:

DIMENSIONS & VIEWS

Mounting Accessories (no additional cost), select type


Adjustable mounting option for applications requiring angle variation.

Allows rotation up to 180° for precise aiming.

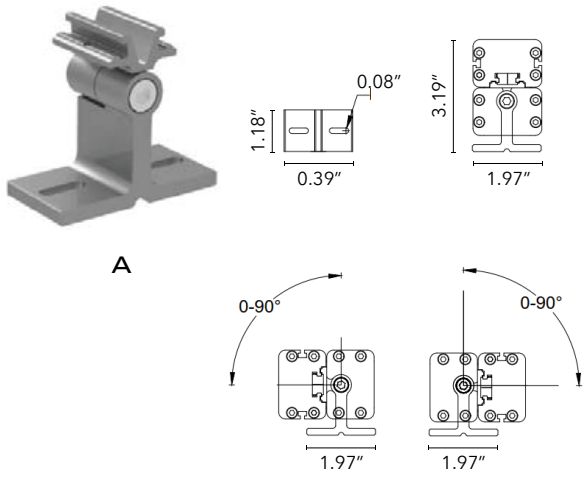


Adjustable mounting option for applications requiring angle variation.

Allows rotation up to 180° for precise aiming.

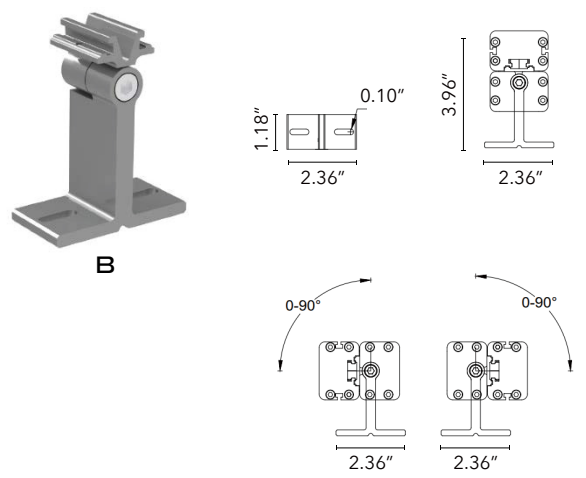


L-shape adjustable mounting option for applications requiring angle adjustment.

Rotates up to 180° for precise positioning.

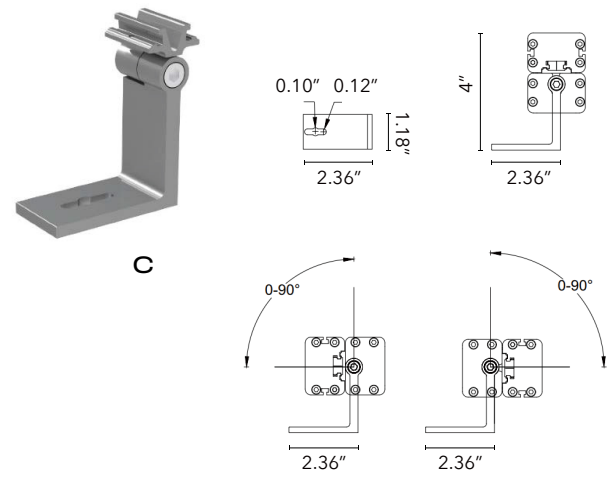

Mounting Accessories (order separately)

Adjustable mounting option for landscape lighting applications.

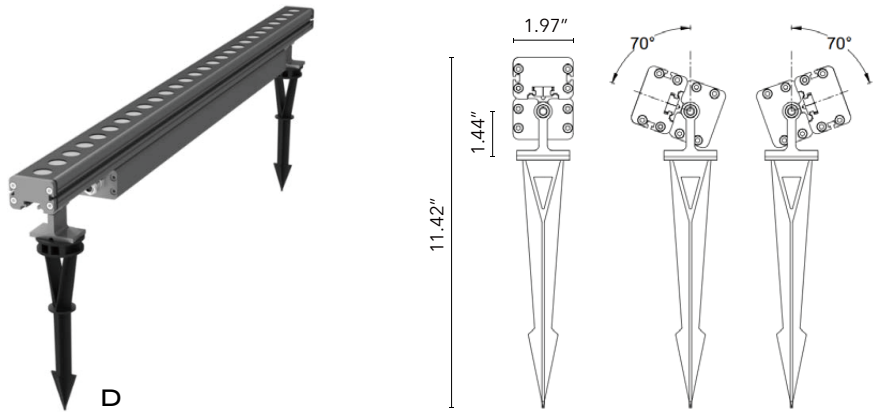


Wall Mount Option

For applications requiring wall installation using a 5.91″ –9.06″ extension arm.

*This option must be ordered together with the fixture, as it includes the required mounting brackets for secure installation.

Wall Mount Option


For applications requiring wall installation with a 13.98″–22.05″ extension arm.

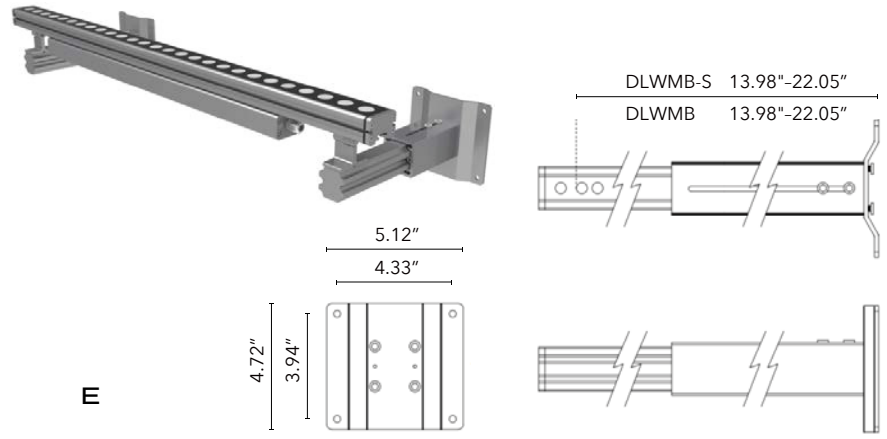

Anti-glare Accessories (order separately)

16.14″ / 23.82″ / 35.43″ / 46.85″


Designed for LineaPro RGBW to reduce glare and refine visual comfort.

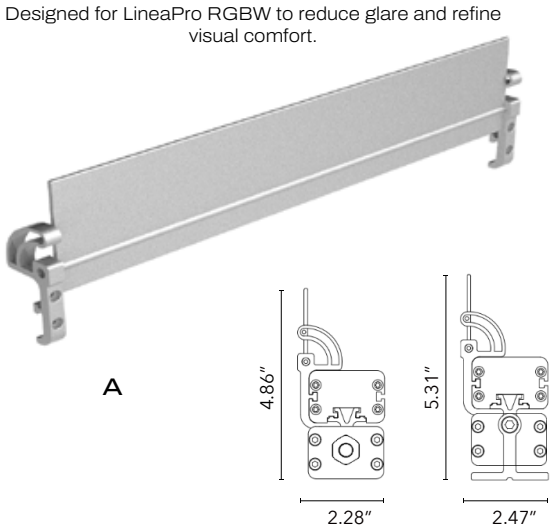

Anti-Glare Shield


16.14″ / 23.82″ / 35.43″ / 46.85″

Asymmetric anti-glare louver designed for LineaPro to enhance visual comfort and controlled illumination.

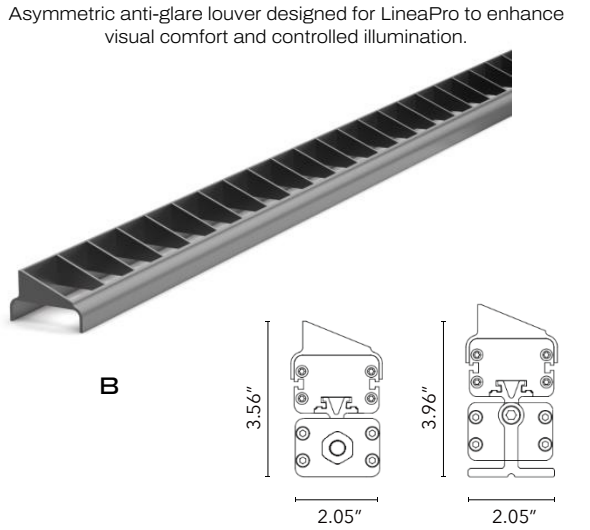

16.14″ / 23.82″ / 35.43″ / 46.85″

Symmetric anti-glare louver for LineaPro RGBW 4-IN-1, providing balanced illumination with enhanced visual comfort.

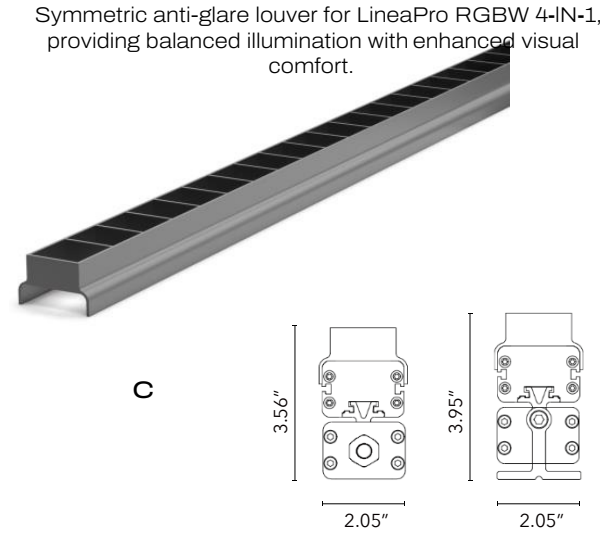

In an effort to offer the best product possible, we reserve the right to change product specifications or materials without notice.

info@binacompany.com
305.735.3114
www.binacompany.com

5 YEAR WARRANTY

Intertek

LineaPro

BINA COMPANY


Project:	Type:	Qty:

DIMENSIONS & VIEWS

Typical Wiring Schematic


Leading Wiring Option One

T-joint with integrated power and data cables for streamlined connection.



Leading Wiring Option Two


Integrated power and data cables for efficient and clean wiring.



Leading Wiring Option Three


T-joint with customizable bare wire lengths.

*Consult factory for bespoke cable lengths.



Power Injection Option One


Power injection with integrated power-leading cable for reliable performance.



Power Injection Option Two

T-joint with customizable bare wire lengths.

*Consult factory for bespoke cable lengths.





Extension Cable:



DMX Terminator (IP66):



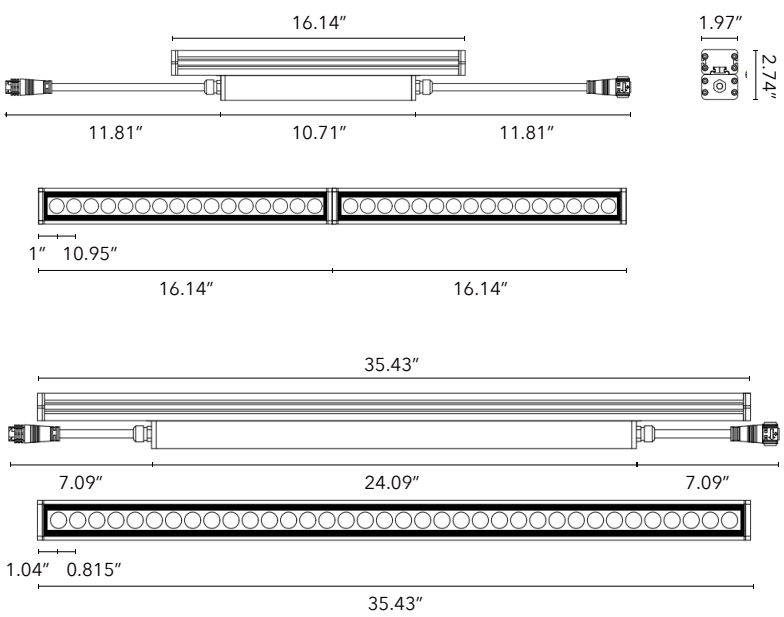

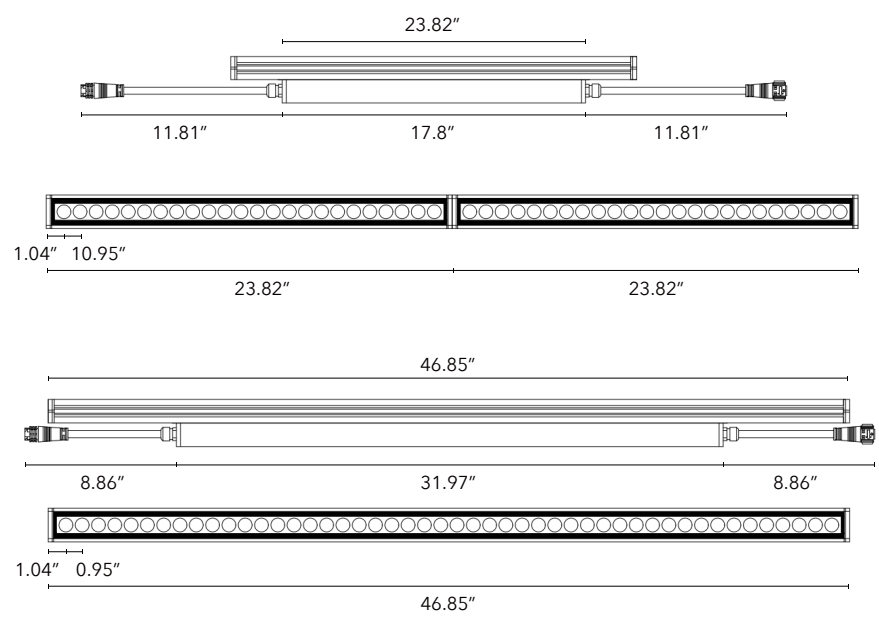

info@binacompany.com
305.735.3114
www.binacompany.com

In an effort to offer the best product possible, we reserve the right to change product specifications or materials without notice.