LineaPro Mega

Bring architecture into focus.



AI-generated lighting concept. Illustrative only; not a verified installation or photometric simulation.

8°
NARROW RGBW BEAM

100W
47.24 IN (1200 MM)

Up to 2×
OUTPUT PER CHANNEL[1]

20
INDIVIDUAL PIXELS[2]



Product visualization

Make color part of the architecture.

Define columns, reveal texture and bring movement to a facade. LineaPro Mega combines focused RGBW optics, high power and scalable pixel control in an IP66-rated linear luminaire.

FACADES / HOSPITALITY / ARCHITECTURAL ACCENTS

Specify a complete system with BINA: fixture length, beam angle, control mode, mounting and glare-control accessories.

[1] Supported fixture-level RDM boost; one or two active channels. [2] Pixel-per-diode configuration of the 47.24 in (1200 mm) fixture. See page 2.

info@binacompany.com | 305.735.3114
www.binacompany.com

Designed for visual impact.


Focused optics. Expressive control. Intelligent protection.

DYNAMIC OUTPUT

More power to your color.

Supported RDM boost mode redirects available power to active channels. One or two active channels deliver up to 2× output per channel compared with standard operation.


Fixture-level RDM only. Total fixture output remains at the standard level.

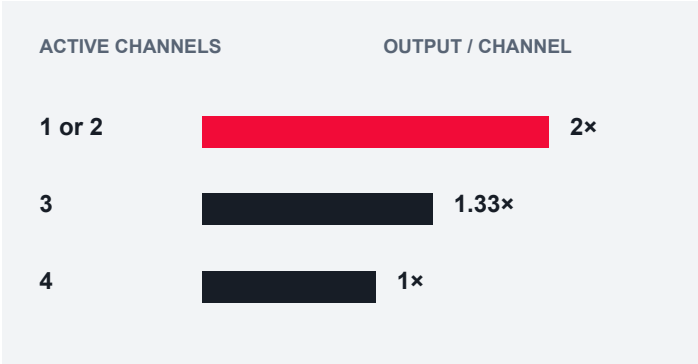

PIXEL CONTROL

From a wash to a wave.

Choose uniform color, four pixel groups, or individual control of all 20 diodes in the 47.24 in (1200 mm) fixture. Build chases and gradients, with supported grouping configurable through RDM.

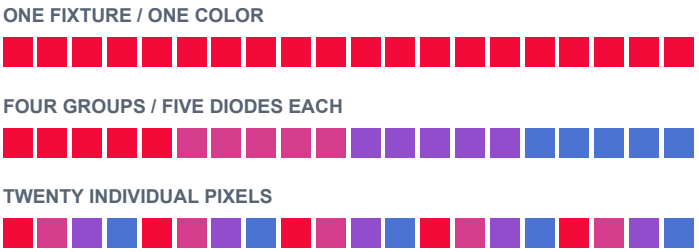

Illustrative colors. Confirm the selected DMX channel map.

THERMAL PROTECTION THAT RESPONDS

Automatic current reduction limits heat at the protection threshold. Normal output returns as temperature stabilizes, helping reduce thermal stress on the LEDs.

SPECIFY YOUR LINEAPRO MEGA

Lengths / power	15.75 in (400 mm) / 33W 23.62 in (600 mm) / 50W 47.24 in (1200 mm) / 100W
Color	RGBW; white at 3000K or 4000K
Optics	8° · 25° · 33° · 10° × 35°
Control	DMX / RDM · Fixture / pixel options
Input	110-277VAC, 50/60Hz
Protection	IP66 · Operating: -20°C to 50°C
Housing	Extruded aluminum
Finishes	White · Grey · Black · Dark grey
Mounting	Adjustable; 4.72 in (120 mm) or 5.51 in (140 mm) height
Accessories	Louvers · Extended arms · Spikes

White-channel CCT may vary by up to 10%. Contact BINA for ordering details, project pricing and configuration-specific documentation.

info@binacompany.com | 305.735.3114
www.binacompany.com