PROJECT

TYPE

COVE

TECHNICAL DATA

A cylindrical aluminum bollard with a single recessed opening near the top.




Technical specifications

Input power	**10 W**
Light source	**SMD LED**
Color temperature	**3000 K**
Color rendering	**CRI >80**
Input voltage	**110-240 V AC**
Dimming	**0-10 V**
Beam angle[1]	**120°**
Housing	**Aluminum**
Finish	**Textured black / RAL 9005**

[1] Nominal beam angle. Request tested photometry for lighting calculations.

Dimensions

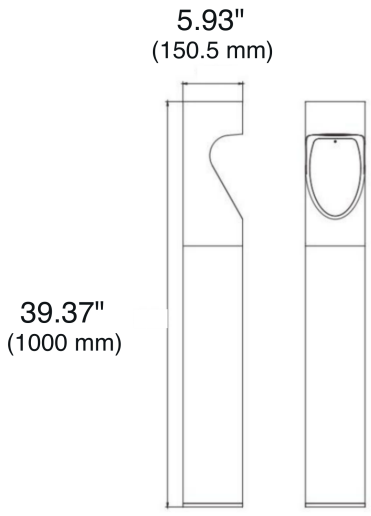

OVERALL DIMENSIONS

Height	**39.37 in**	1000 mm
Diameter	**5.93 in**	150.5 mm

Metric dimensions govern. Inch values are rounded to two decimals.

DRAWING USE

Coordinate anchors and wiring using approved installation drawings. Custom heights are available by quotation. Confirm dimensions against the approved production drawing.

Project coordination

Confirm tested lumen output, IES availability and whole-fixture listing with BINA before final specification. Standard finishes are not suitable for coastal environments. Additional coastal surface treatment is available by quotation; confirm project requirements with BINA.

PROJECT

TYPE

COVE DUO

TECHNICAL DATA

Two recessed openings are stacked along the cylindrical aluminum body.




Brown finish shown. Specified finish is black.

Technical specifications

Input power	**10 W**
Light source	**SMD LED**
Color temperature	**3000 K**
Color rendering	**CRI >80**
Input voltage	**110-240 V AC**
Dimming	**0-10 V**
Beam angle[1]	**120°**
Housing	**Aluminum**
Finish	**Black**

[1] Nominal beam angle. Request tested photometry for lighting calculations.

Dimensions

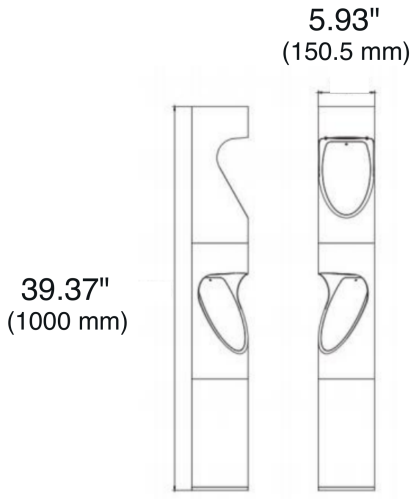

OVERALL DIMENSIONS

Height	**39.37 in**	1000 mm
Diameter	**5.93 in**	150.5 mm

Metric dimensions govern. Inch values are rounded to two decimals.

DRAWING USE

Coordinate anchors and wiring using approved installation drawings.

Project coordination

Confirm tested lumen output, IES availability and whole-fixture listing with BINA before final specification. Use the standard finish on noncoastal sites.

PROJECT

TYPE

COVE

APPLICATION



COVE shown

AI-generated architectural concept. Lighting is illustrative.

Configuration reference

MODEL	HEIGHT	INPUT	CCT	FINISH
COVE	39.37 in (1000 mm)	10 W	3000 K	Black / RAL 9005
COVE DUO	39.37 in (1000 mm)	10 W	3000 K	Black

COVE has one recess; COVE DUO has two. RAL 9005 textured black, custom heights and additional coastal treatment described on the COVE technical sheet apply to the single-recess COVE only. Confirm the selected configuration and finish with BINA.