
PROJECT: TYPE: QTY:

LINX

BINA COMPANY™

ATTRAKT Lighting System



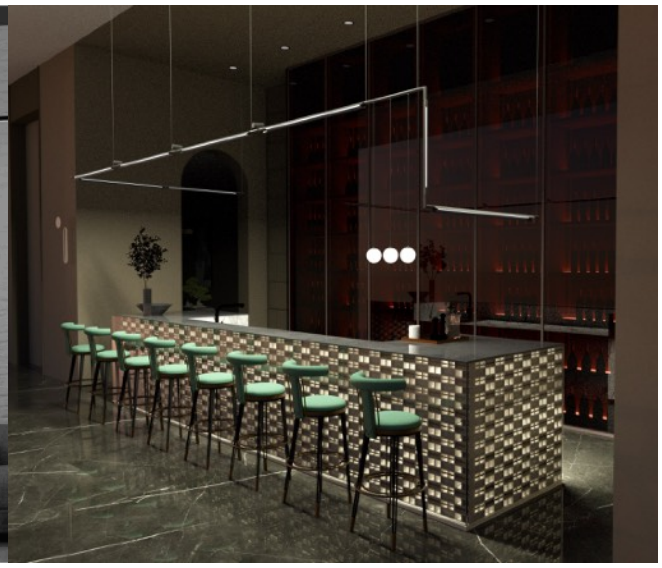

Linkable Lighting System

LINX is a versatile 48V linkable system that can be mounted on the ceiling, wall or floor.

LINX segments can be rotated 360 degrees.

Mix and match segments with luminaires to create a unique design.

LINX is fully customizable and can produced to specific size run lengths.

BubblyNet human-centric building control

SPECIFICATIONS

HOW TO SPECIFY

1. Specify the application and mounting.
2. Specify the segments and luminaires.
3. Specify the connector type needed and quantity. If you prefer this to be done by the factory, please provide RCP and/or drawings.
4. For complex or patterned runs, please provide a drawing of the design and full layout.
5. Calculate total wattage. The factory will determine the size and quality of drivers.

Series	Application	Mounting	Ceiling Canopy	Input Voltage
LINX	**C** Ceiling	**SM** Stem Mounted **#** 2" / 4.5"/Custom	**RC**[2] Recessed Driver	**120V**
	W Wall	**AC** Suspended w/ AC Cable **#** Specify Length	**SC**[3] Surface Canopy	**277V**
	W2C Wall to Ceiling	**DR** Direct to Ceiling or Wall	**RM**[4] Remote Driver	
	ML[1] Multiple Levels			

[1]Provide RCP/Drawings showing layout and design
[2]Driver can be recessed in the ceiling and accessable from below.
[3]Driver can be housed in the canopy.
[4]Driver will be installed remotely (up to 50' away).

In an effort to offer the best product possible, we reserve the right to change, without notice, specification or material of the product.

5 YEAR WARRANTY

Intertek


PROJECT: TYPE: QTY:


LINX

ATTRAKT Lighting System

BINA COMPANY™

SEGMENTS

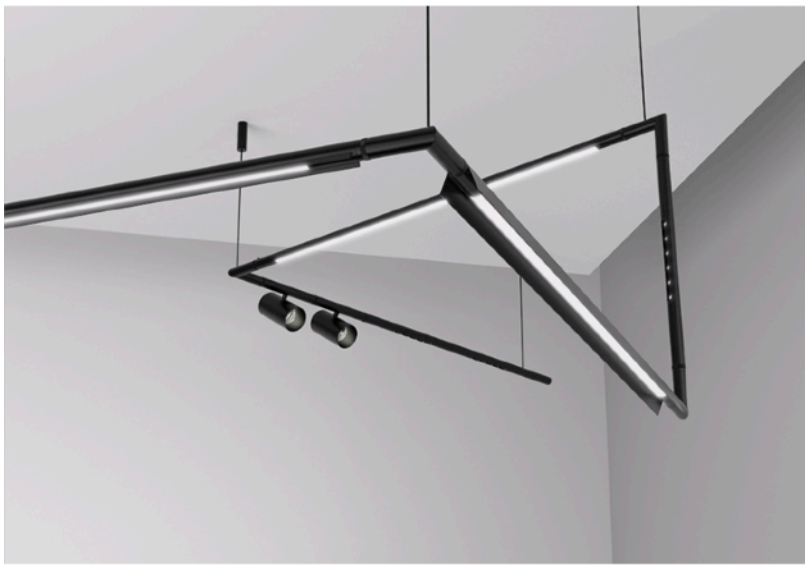

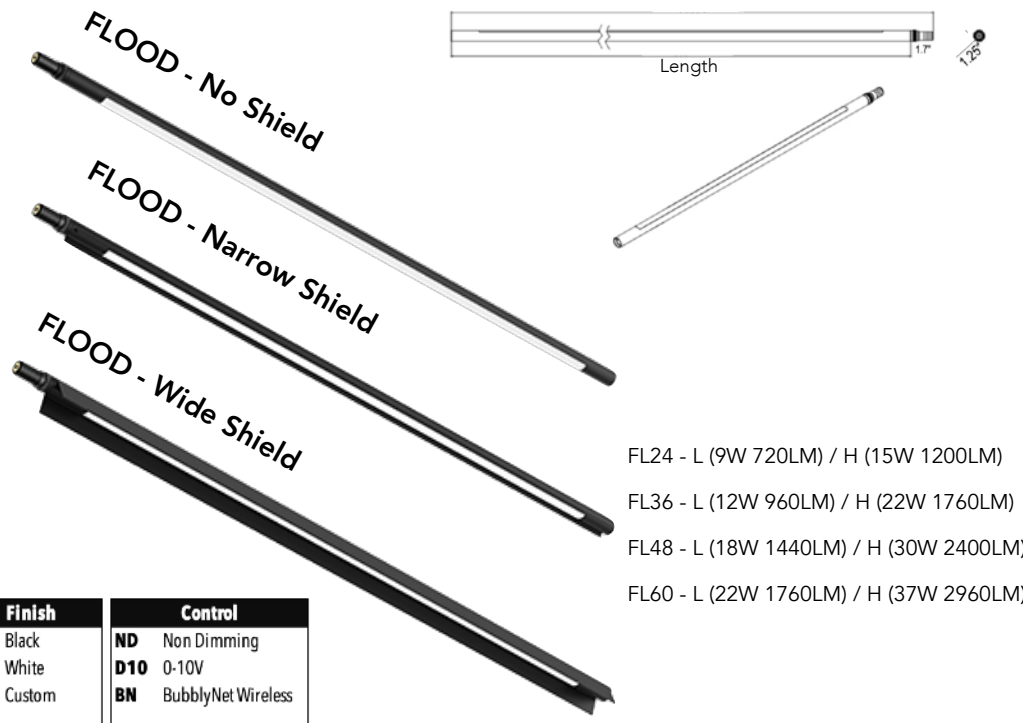

FL24 - L (9W 720LM) / H (15W 1200LM)

FL36 - L (12W 960LM) / H (22W 1760LM)

FL48 - L (18W 1440LM) / H (30W 2400LM)

FL60 - L (22W 1760LM) / H (37W 2960LM)

Flood		Diameter	Shield		Output		CCT		Optic		Finish		Control	
FL24	24"	**LRG** Large 1.25"		No Shield	**L**	Low	**27K**	2700K	**120**	120 Degree	**BK**	Black	**ND**	Non Dimming
FL36	36"		**NS**	Narrow Shield	**H**	High	**30K**	3000K			**WH**	White	**D10**	0-10V
FL48	48"		**WS**	Wide Shield			**35K**	3500K			**RAL**	Custom	**BN**	BubblyNet Wireless
FL##	Custom						**40K**	4000K						



Diffused 360D Flood




DF15 - L 8W (640LM) / H 12W (960LM)

DF28 - L (16W 1280LM) / H (22W 1760LM)

DF36 - L (24W 1920LM) / H (30W 2400LM)

DF48 - L (32W 2560LM) / H (37W 2960LM)

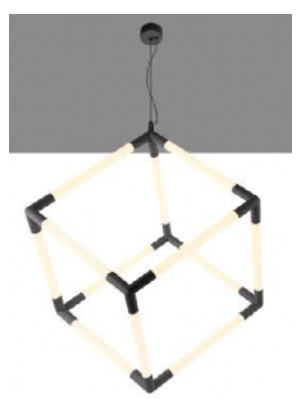

Diffused		Diameter	Shield	Output		CCT		Optic		Finish		Control	
DF15	15"	**LRG** Large 1.25"	No Shield	**L**	Low	**27K**	2700K	**360D**	360 Degree	**BK**	Black	**ND**	Non Dimming
DF28	28"			**H**	High	**30K**	3000K			**WH**	White	**D10**	0-10V
DF36	36"					**35K**	3500K			**RAL**	Custom	**BN**	BubblyNet Wireless
DF48	48"					**40K**	4000K						

In an effort to offer the best product possible, we reserve the right to change, without notice, specification or material of the product.

5 YEAR WARRANTY

c ETL us Intertek

PROJECT: TYPE: QTY:

LINX

ATTRAKT Lighting System

BINA COMPANY™

SEGMENTS










WW24 - 21W

WW36 - 32W

WW48 - 42W

Wall Wash		Diameter	Shield		Output		CCT	Optic		Finish		Control	
WW24	24"	**LRG** Large 1.25"		No Shield	**L**	Low	27K 2700K	**20D**	20 Degree	**BK**	Black	**ND**	Non Dimming
WW36	36"		**NS**	Narrow Shield	**H**	High	30K 3000K	**40D**	40 Degree	**WH**	White	**D10**	0-10V
WW48	48"		**WS**	Wide Shield			35K 3500K			**RAL**	Custom	**BN**	BubblyNet Wireless
WW##	Custom						40K 4000K						

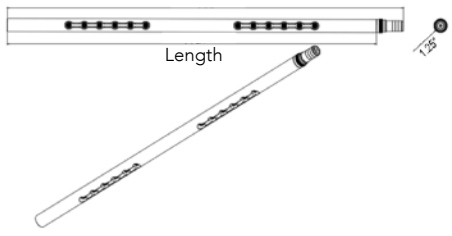






GR12 - 6W (390LM)

GR24 - 12W (780LM)

GR36 - 18W (1170LM)

GR48 - 24W (1560LM)

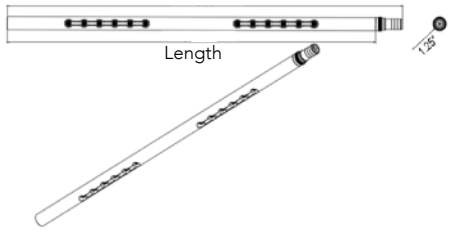

Grille		Diameter	Shield		Output		CCT	Optic		Finish		Control	
GR12	12"	**LRG** Large 1.25"		No Shield	**L**	Low	**27K** 2700K	**12D**	12 Degree	**BK**	Black	**ND**	Non Dimming
GR24	24"		**NW**	Narrow Shield	**H**	High	**30K** 3000K	**24D**	24 Degree	**WH**	White	**D10**	0-10V
GR36	36"						**35K** 3500K	**36D**	36 Degree	**RAL**	Custom	**BN**	BubblyNet Wireless
GR48	48"						**40K** 4000K						
GR##	Custom												

info@binacompany.com | 305.735.3114 | www.binacompany.com

In an effort to offer the best product possible, we reserve the right to change, without notice, specification or material of the product.

5 YEAR WARRANTY

Intertek


PROJECT: TYPE: QTY:

LINX

ATTRAKT Lighting System

BINA COMPANY™


LUMINAIRES

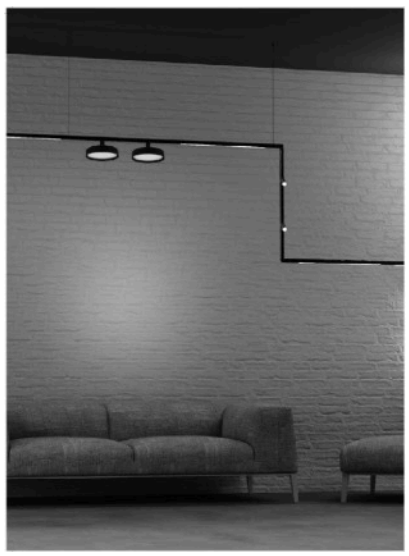




SUN

10W (800LM)
20W (1600LM)



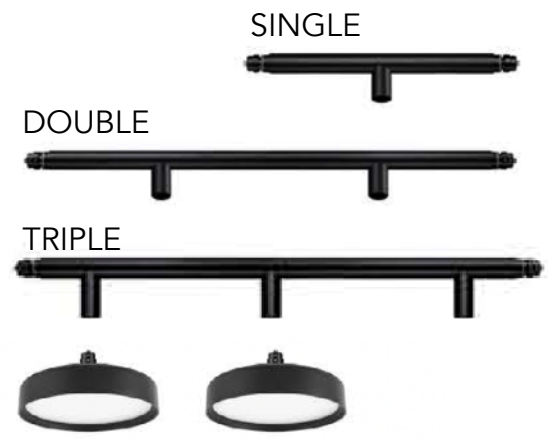



TUBE - LOW 5W (400LM) / HIGH 10W (800LM)





GLOBE - G4



4″ Milky Glass

GLOBE PENDANT - G4P




LOW 5W - 250LM

HIGH 10W - 500LM

SPOT - S45




LOW 5W (390LM)
HIGH 10W (780LM)



SPOT - S55



LOW 8W (625LM)
HIGH 15W (1170LM)



Tube	Length	Output	CCT	Optic	Finish	Cable Length	Control
Tube	1L Single 2L Double 3L Triple	L Low(5W) H High(10W)	27K 2700K 30K 3000K 35K 3500K 40K 4000K	15D 15 Degree 24D 24 Degree 38D 38 Degree	WH Black WH Gold RAL Custom	# Length in inches	ND Non Dimming D10 0-10V BN BubblyNet Wireless

Globe	Length	Output	CCT	Optic	Finish	Cable Length	Control
G4 G4P Pendant	1L Single 2L Double 3L Triple	L Low(5W) H High(10W)	27K 2700K 30K 3000K 35K 3500K 40K 4000K	120D 120 Degree	WH Black WH White RAL Custom	# Length in inches	ND Non Dimming D10 0-10V BN BubblyNet Wireless

Spot	Length	Output	CCT	Optic	Finish	Control
S45 5W/10W S55 8W/15W	1L Single 2L Double 3L Triple	L Low H High	27K 2700K 30K 3000K 35K 3500K 40K 4000K	12D 12 Degree 24D 24 Degree 36D 36 Degree	BK Black WH White RAL Custom	ND Non Dimming D10 0-10V BN BubblyNet Wireless

Sun	Length	Output	CCT	Optic	Finish	Control
SN10 10W SN20 20W	1L Single 2L Double 3L Triple	L Low(10W) H High(20W)	27K 2700K 30K 3000K 35K 3500K 40K 4000K	110D 110 Degree	BK Black WH White RAL Custom	ND Non Dimming D10 0-10V BN BubblyNet Wireless

info@binacompany.com | 305.735.3114 | www.binacompany.com

In an effort to offer the best product possible, we reserve the right to change, without notice, specification or material of the product.

5 YEAR WARRANTY

ETL LISTED Intertek

PROJECT: TYPE: QTY:


LINX

ATTRAKT Lighting System


BINA COMPANY™

CONNECTORS

L-Corner




T-Connector




Connector		Quanity	Finish	
LC	L Connector	# ___ Specify QTY	BK	Black
TC	T Connector		WH	White
IC	I Connector		RAL	Custom
EC	End Cap Connector			
K1	1 way Knuckle Connector			
K2	2 way Knuckle Connector			
C3[5]	3 way Corner Connector			

I-Connector




End-Cap Connector




3-Way Corner







Knuckle Connectors


1-Way 

2-Way 

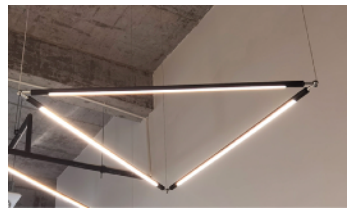

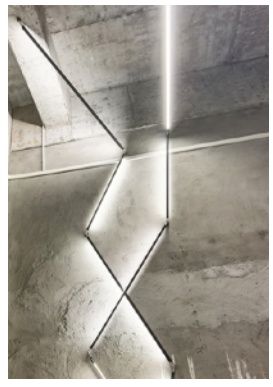

Non-lit Level Connectors

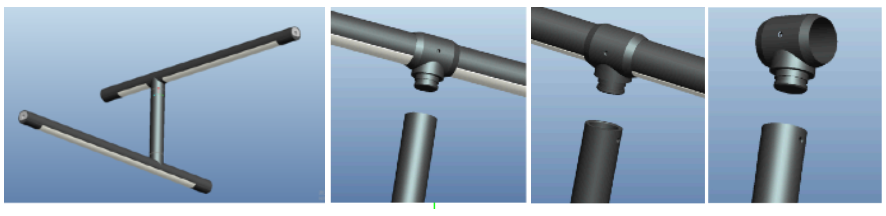

Non-lit Length Connectors



Non-Lit Connector		Quanity	Finish	
LV##[6]	Level Connector	# ___ Specify QTY	BK	Black
NLC##[7]	Non-lit length Connector		WH	White
			RAL	Custom

Length of non-lit connectors can be customized.

[5]Used only for creating 3D shapes. Layout and design will be required.
[6]Specify length and Level (example Level 1 = LV12"). Layout and design will be required.
[7]Specify length (example NLC36"). Layout and design will be required.

info@binacompany.com | 305.735.3114 | www.binacompany.com

In an effort to offer the best product possible, we reserve the right to change, without notice, specification or material of the product.

5 YEAR WARRANTY

Intertek

PROJECT: TYPE: QTY:


LINX

BINA COMPANY


ATTRAKT Lighting System

POWER

Female Plug & Power Feed - FP

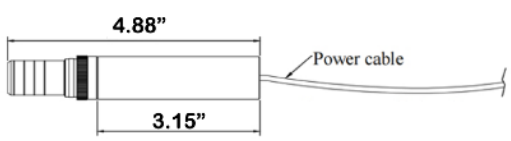

Male Plug & Power Feed - MP

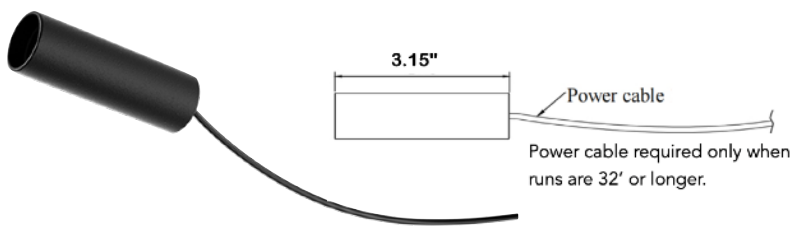

The number of female and male power feeds will be determined by the factory based on the design and system configuration/layout. You do not need to specify, however, a drawing or layout will be required.

MOUNTING

Suspension



Direct to to wall or ceiling



Combination of suspended with cable and stem mounted.



Stem Mounted




2” or 4.5”

Recessed Canopy




Size of canopy will depend on driver



Surface Mount Canopy



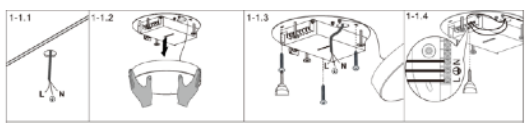

In an effort to offer the best product possible, we reserve the right to change, without notice, specification or material of the product.