


M45 7,5 x 6 x 5 m

ALSPAW
YOUR ALUMINIUM PARTNER

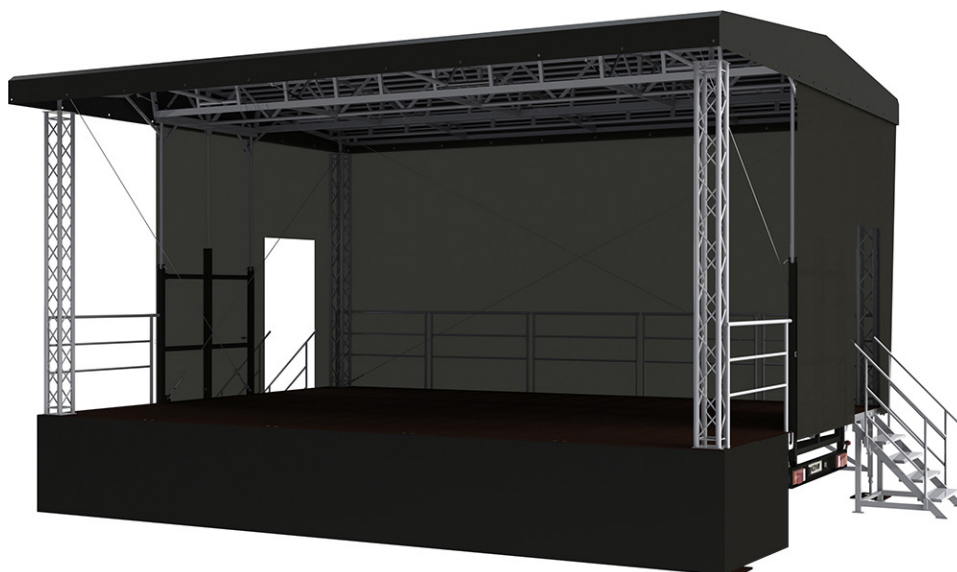

Technical data	
Type of roof	standard
Dimensions as a stage	7,5 m x 6,0 m x 5,0 m
Dimensions as a trailer	8,9 m x 2,45 m x 3,6 m
Permitted total weight	2500 kg
Stage area	45 m ²
Height of stage floor	1,0 - 1,3 m
Stage floor	slip proof, weather proof
Roof capacity	300 kg - uniformly on front and back part of the roof (the end tube) 70 kg - uniformly on front and back part of the roof (the middle tube) 500 kg - uniformly on the middle part of the roof
Floor capacity	3,5 kN/m ² (~350 kg/m ²)
Front pillars load capacity	50 kg
Flying Towers load capacity	250 kg (in the middle point)
Max. wind speed	Wind zone 1 – 3 excepting the 5 km wide coastal areas and the islands of the North Sea and the Baltic Sea: max 17.8 m/s with the back and sides cover and max 27.5 m/s without covers
Max. thickness of snow on the roof	Mobile stages should be used only in periods in which there is no snow, unless the snow is effectively removed, e.g. by installing the appropriate heating devices
Canopy	PCV certified material (flame resistant)
Scrim	A203 (white or black)
Installation time	30 min (1-2 people)

Equipment	
Basic accessories and options	- PVC canopy for the roof - Scrim for back and sides (¾) - Down covering PVC canopy - Truss pillars (250-Q) x 4 pcs - Standard stairs x 2 pcs - Rails for 3 sides - Spare parts - Manual hydraulic system of lifting up the roof - Manual system of levelling the floor

M45 7,5 x 6 x 5 m