


SYNTHETIC-STEEL FLASHING W. SHRINK TUBING

TECHNICAL DATA SHEET



ACCESSORIES FOR
ROOF EXCELLENCE & SAFETY
www.mul10metal.dk

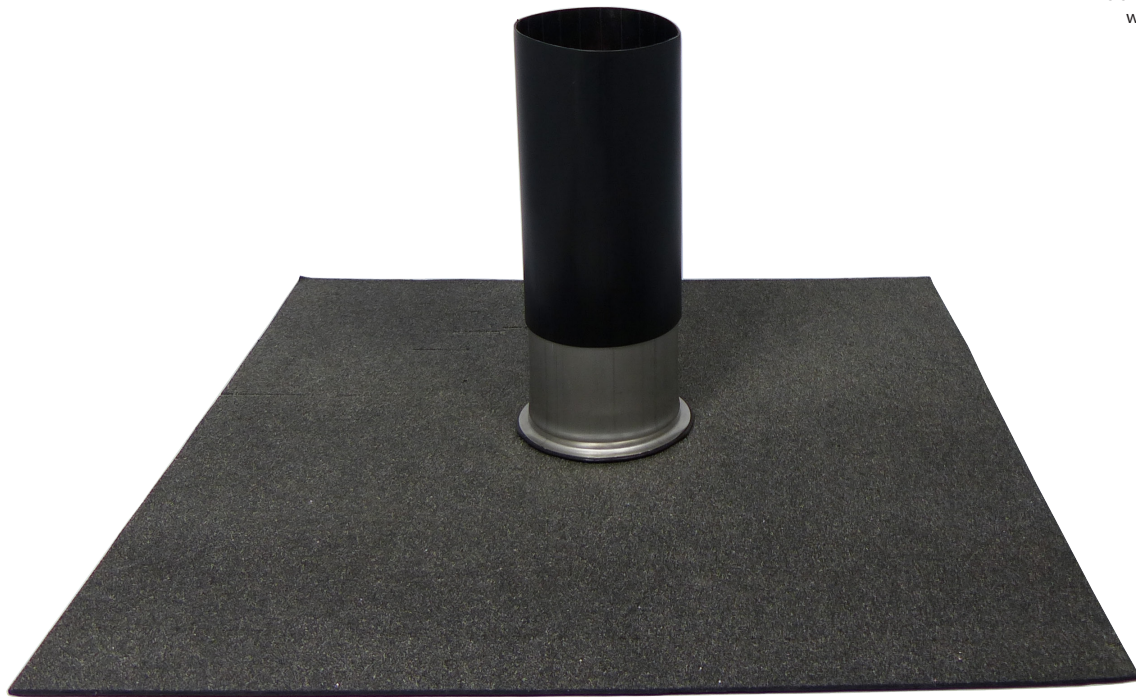

DESCRIPTION		
Flashing with shrink tubing for roofs with foil		
TECHNICAL DATA		
PART	DIMENSIONS	MATERIAL / DESCRIPTION
Pipe	Ø40 - 250mm H:150mm	0,5mm Stainless acid-proof steel AISI 316
Shrink tubing	-	Polyolefin, halogenfri
Skirt	333x333mm	PVC - foil - brand and colour of choice
Plate	225x225mm	Stainless acid-proof steel AISI 316 with holes for fastening

ITEM NO.	DIAMETER	HEIGHT
SYNTHETIC-STEEL FLASHING W. SHRINK TUBING		
247040	Ø40mm	150mm
247050	Ø50mm	150mm
247060	Ø60mm	150mm
247075	Ø75mm	150mm
247090	Ø90mm	150mm
247110	Ø110mm	150mm
247125	Ø125mm	150mm
247160	Ø140mm	150mm
247250	Ø250mm	150mm


SYNTHERIC-STEEL FLASHING W. SHRINK TUBING

TECHNICAL DATA SHEET



ACCESSORIES FOR
ROOF EXCELLENCE & SAFETY
www.mul10metal.dk


TECHNICAL DRAWING

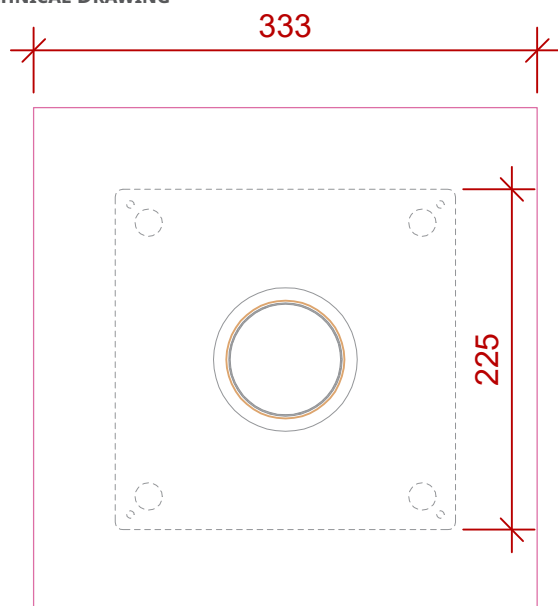


Plan A-A 1:5

Shrinking

- Ø 40 mm > Ø 12 mm
- Ø 55 mm > Ø 16 mm
- Ø 65 mm > Ø 19 mm
- Ø 75 mm > Ø 22 mm
- Ø 95 mm > Ø 25 mm
- Ø 114 mm > Ø 34 mm
- Ø 140 mm > Ø 42 mm
- Ø 160 mm > Ø 50 mm
- Ø 235 mm > Ø 65 mm

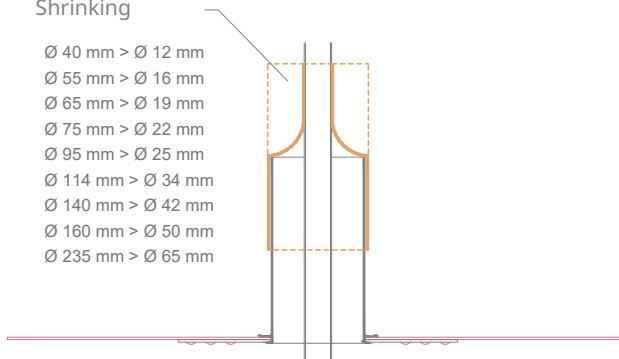

PLAN

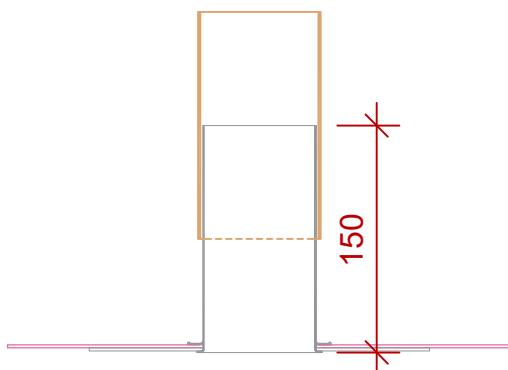

SECTION

ELEVATION

