


BIMUTEN-STEEL FLASHING W. SHRINK TUBING

TECHNICAL DATA SHEET



ACCESSORIES FOR
ROOF EXCELLENCE & SAFETY
www.mul10metal.dk

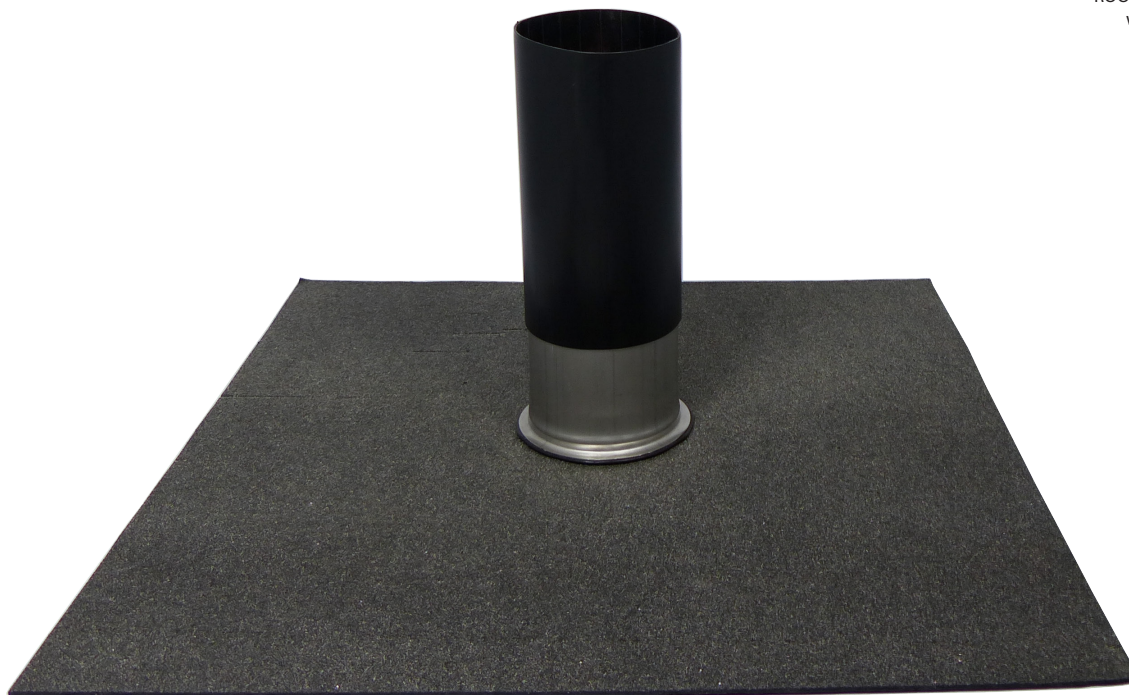

DESCRIPTION		
Flashing with shrink tubing for roofs with bitumen		
TECHNICAL DATA		
PART	DIMENSIONS	MATERIAL / DESCRIPTION
Pipe	Ø40 - 250mm H:150mm	0,5mm Stainless acid-proof steel AISI 316
Shrink tubing	-	Polyolefin, halogenfri
Skirt	500x500mm	Standard is made with 1 layer SBS-bitumen. But can also be ordered with 2-layer bitumen (SBS over- og under-bitumen)
Plate	225x225mm	Stainless acid-proof steel AISI 316 with holes for fastening

ITEM NO.	DIAMETER	HEIGHT
BIMUTEN-STEEL FLASHING W. SHRINK TUBING		
246040	Ø40mm	150mm
246050	Ø50mm	150mm
246060	Ø60mm	150mm
246075	Ø75mm	150mm
246090	Ø90mm	150mm
246110	Ø110mm	150mm
246125	Ø125mm	150mm
246160	Ø140mm	150mm
246250	Ø250mm	150mm


BIMUTEN-STEEL FLASHING W. SHRINK TUBING

TECHNICAL DATA SHEET




ACCESSORIES FOR
ROOF EXCELLENCE & SAFETY
www.mul10metal.dk

TECHNICAL DRAWING

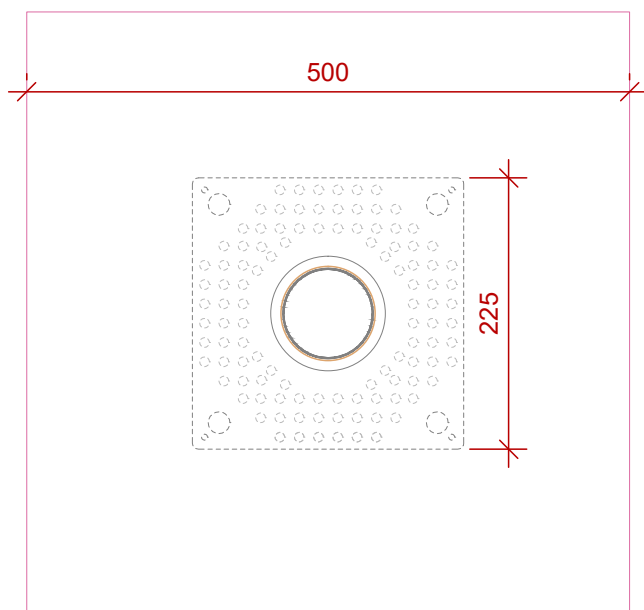



PLAN

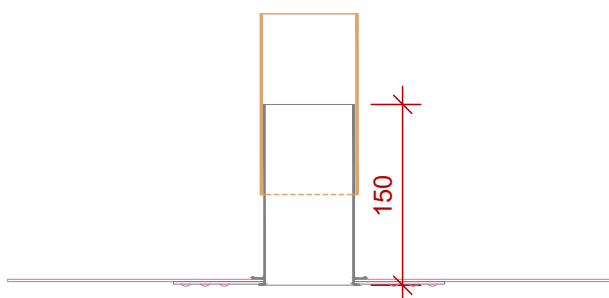

SECTION

Shrinking

- Ø 40 mm > Ø 12 mm
- Ø 55 mm > Ø 16 mm
- Ø 65 mm > Ø 19 mm
- Ø 75 mm > Ø 22 mm
- Ø 95 mm > Ø 25 mm
- Ø 114 mm > Ø 34 mm
- Ø 140 mm > Ø 42 mm
- Ø 160 mm > Ø 50 mm
- Ø 235 mm > Ø 65 mm

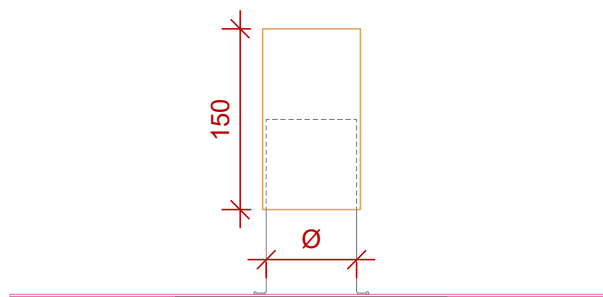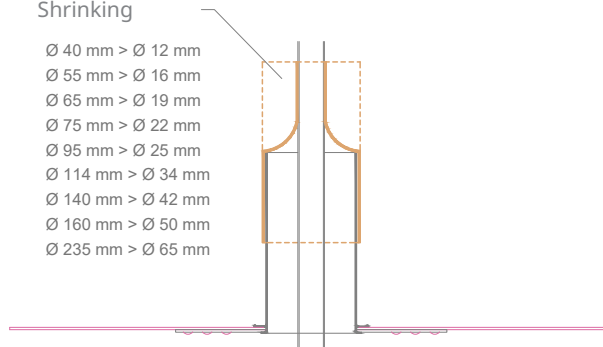

ELEVATION



QUESTIONS?

CALL US
+45 76 83 01 01