

CYLINDER BLADFANG

TEKNISK DATABLAD



TAGBRANCHENS
SIKRE VALG
www.mul10metal.dk



BESKRIVELSE		
Cylinder bladfang nedsættes i tagbrønd, forhindre tilstoppelse. Anbefales at blive tilset og renses mindst 2 gange om året (forår og efterår).		
TEKNISK DATA		
ELEMENT	DIMENSION	MATERIALE / BESKRIVELSE
Cylinder Bladfang	Ø50-125mm	Rustfri Syrefast stål AISI 316.

VARENr.	DIAMETER
CYLINDER BLADFANG	
147001	Ø50mm
147002	Ø60mm
147003	Ø75mm
147004	Ø90mm
147005	Ø110mm
147006	Ø125mm


CYLINDER BLADFANG

TEKNISK DATABLAD


TEKNISKE TEGNINGER




TAGBRANCHENS
SIKRE VALG
www.mul10metal.dk

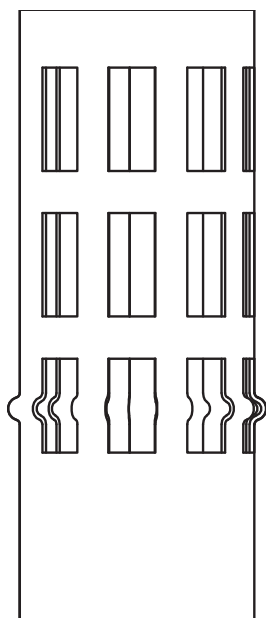

PLAN

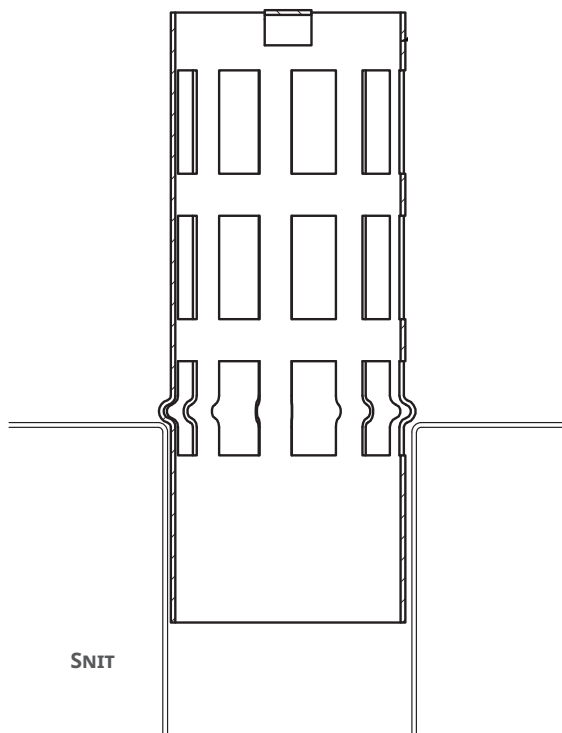

SNIT



OPSTALT



SPØRGSMÅL?

RING TIL OS PÅ
76 83 01 01