



SYNTHETICS-STEEL ROOF DRAIN - ANGLED

TECHNICAL DATA SHEET



Leaf grate

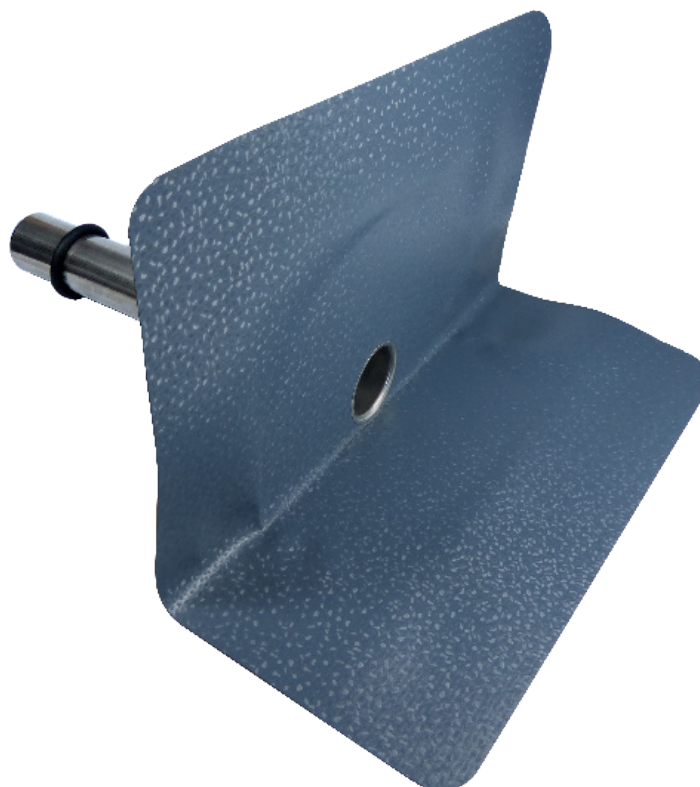

DESCRIPTION		
Roof drain for drainage of flat roofs with PVC roof foil incl. O-ring and Leaf Grate (lightning)		
TECHNICAL DATA		
PART	DIMENSION	MATERIAL
Pipe	Ø50-125mm L:400-600mm	Non-annealed, welded stainless acid-resistant steel pipes AISI 316 - tolerances according to DIN EN ISO 1127: D3/T3 100% eddy current tested according to EN 10893-1 and EN 10893-2
Foil skirt	333x333mm	PVC Foil (made after request)
Plate	225x225mm	Stainless acid-proof steel AISI 316 with holes for fastening
O-ring	Ø50-125mm	Sponge rubber
ADDITIONAL DATA		
ELEMENT	DATA	
Peel-test	Peel-tested according to EN 1253-2	
Installation in pipe with sleeve	When installing with a sleeve, use a roof drain with the same Ø (e.g. roof drain Ø75 + sleeve Ø75).	
Installation with insert	When installing with an insert, use a smaller roof drain (e.g. roof drain Ø75 + insert Ø90).	

ITEM NO.	DIAMETER	PIPE LENGTH
FOLIE-STEEL ROOF DRAIN - ANGLED		
242050	Ø50mm	400mm
242650	Ø50mm	600mm
242060	Ø60mm	400mm
242660	Ø60mm	600mm
242075	Ø75mm	400mm
242675	Ø75mm	600mm
242090	Ø90mm	400mm
242690	Ø90mm	600mm
242110	Ø110mm	400mm
242610	Ø110mm	600mm
242125	Ø125mm	400mm
242625	Ø125mm	600mm


SYNTHETICS-STEEL ROOF DRAIN - ANGLED

TECHNICAL DATA SHEET





ACCESSORIES FOR
ROOF EXCELLENCE & SAFETY
www.mul10metal.dk


TECHNICAL DRAWING

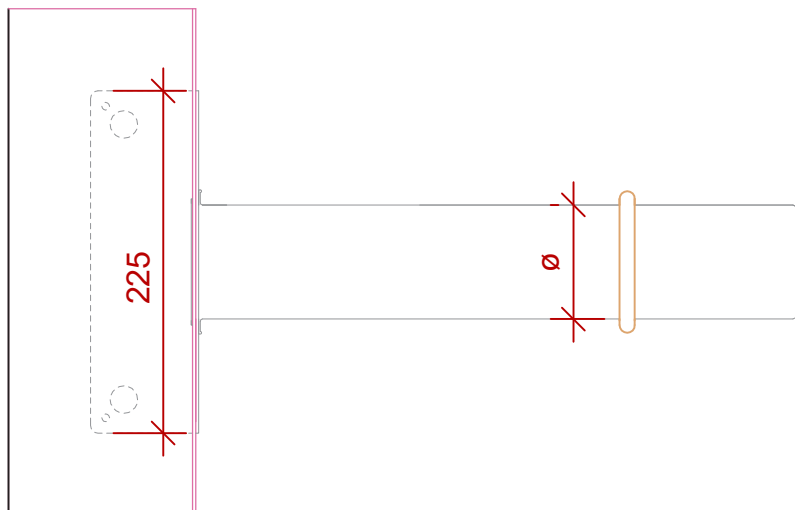

PLAN

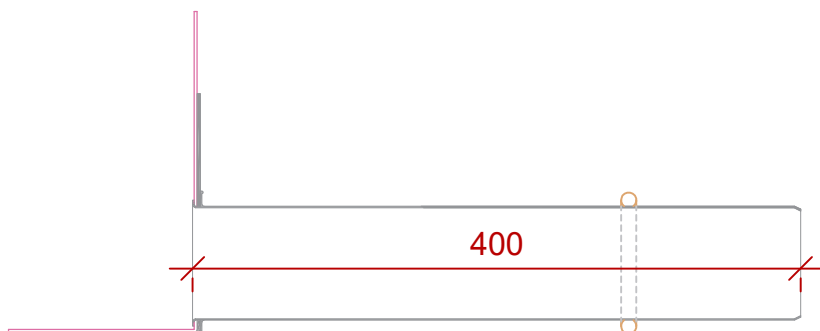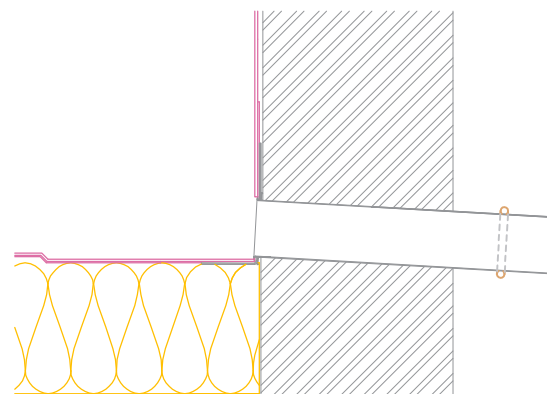


SECTION

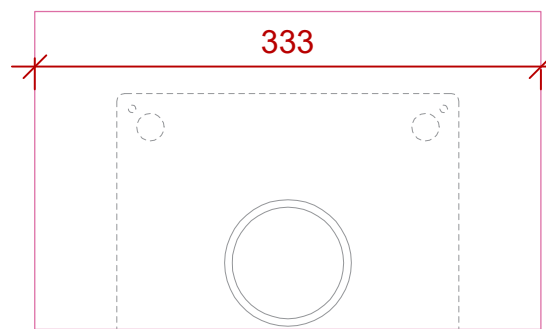

ELEVATION

DRAIN CAPACITY	
Pipe diameter	Area of roof surface that can be drained
Ø70mm	90-130 m ²
Ø80mm	130-180 m ²
Ø90mm	180-230 m ²
Ø100mm	230-340 m ²

NOTE: Always install a minimum of two roof drains in the event of blockage, regardless of roof area.

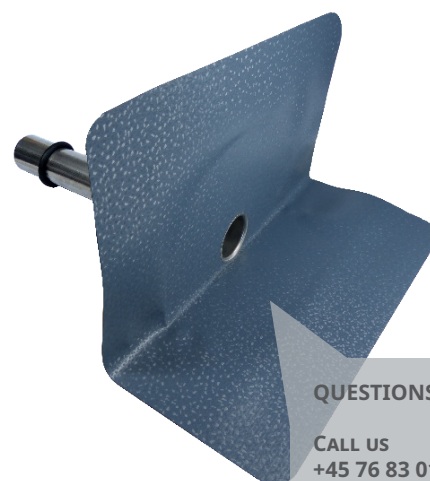

QUESTIONS?

CALL US
+45 76 83 01 01