




JEEP JK/JL/JT 1350 Drive Shafts

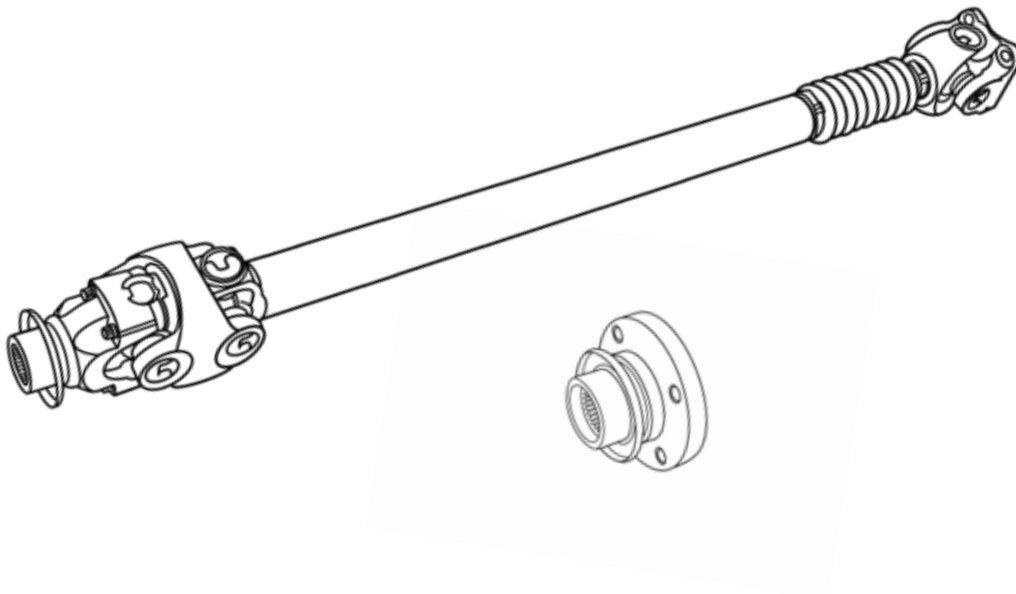


Last Updated 5/29/25
WWW.POISONFROGUSA.COM

ROCK THE TRAIL

IMPORTANT NOTES

- Prior to beginning this install, or any installation, read the instructions thoroughly to familiarize yourself with the required steps. Evaluate if you are experienced and capable to personally perform these modifications.
- Refer to the parts list to ensure that all necessary components and hardware has been included. If any parts are missing, please contact your local dealer for assistance.

View of the yoke on the transfer case.


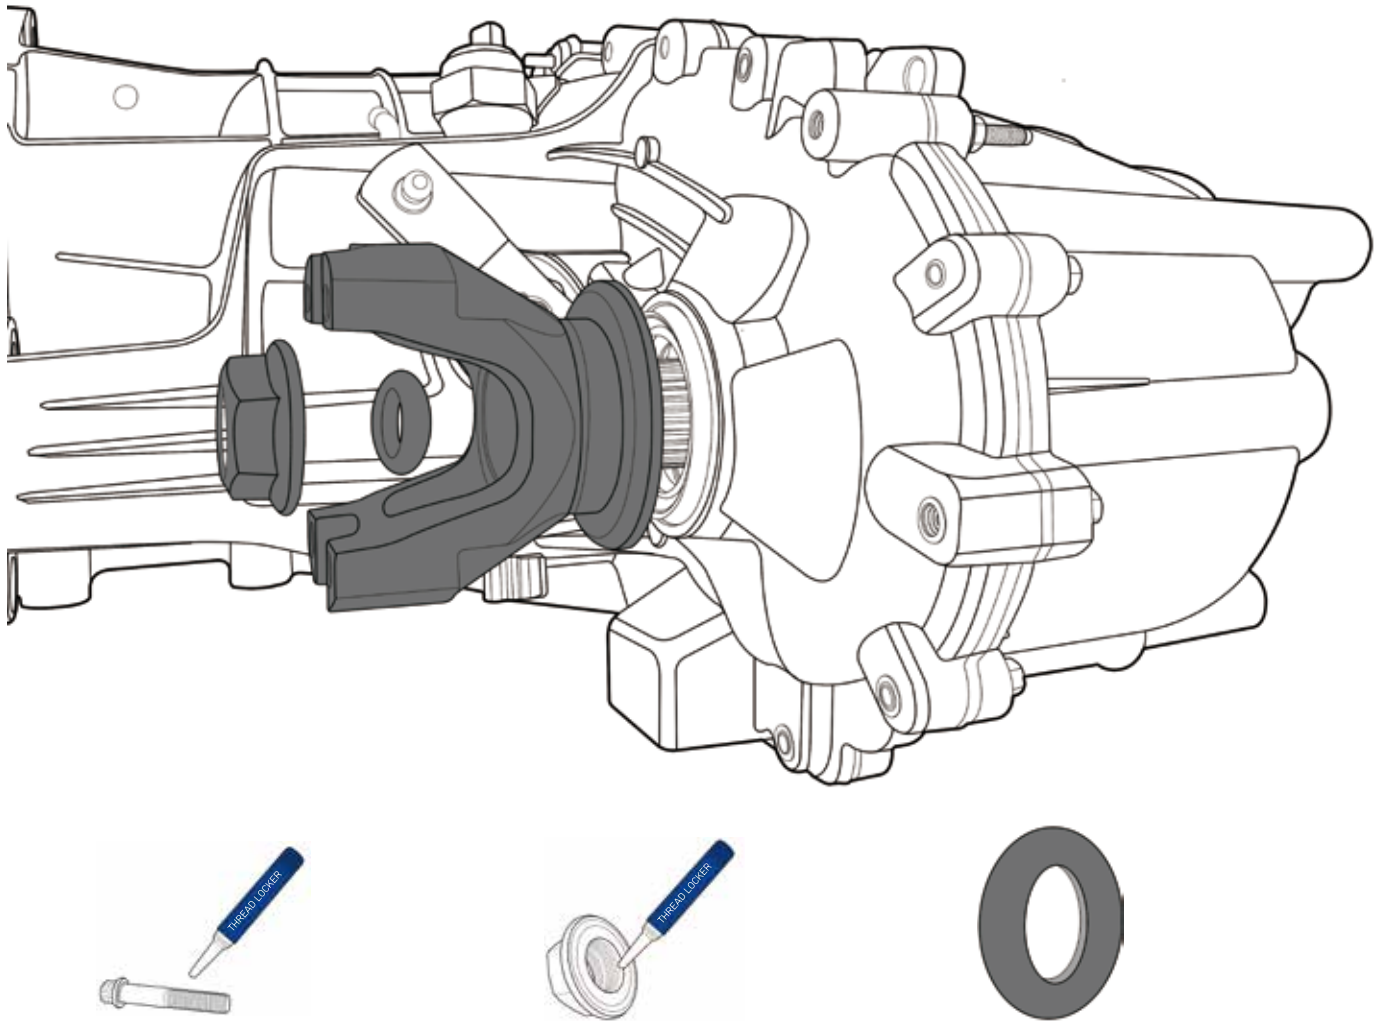


Install bolts must use thread locker.




Use the OE O-Ring seal.

Retighten all driveline bolts after the first 100 miles and every 3000 miles there after.

FRONT SHAFT

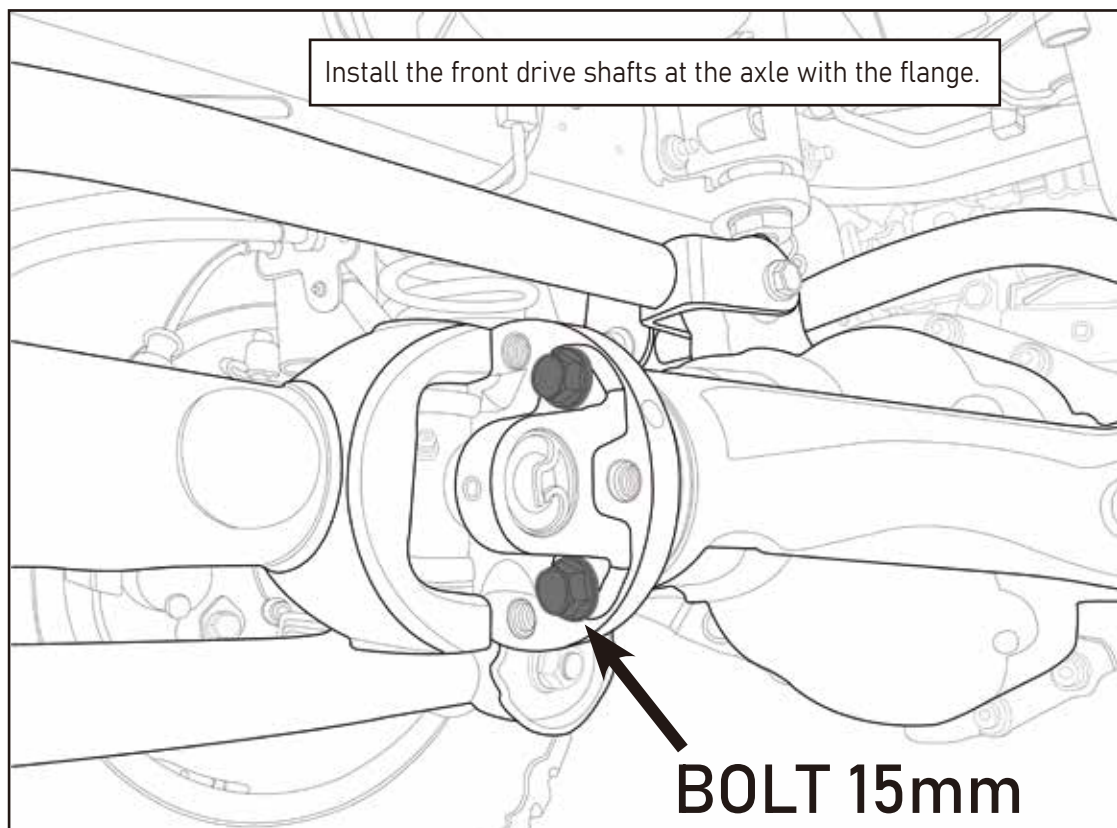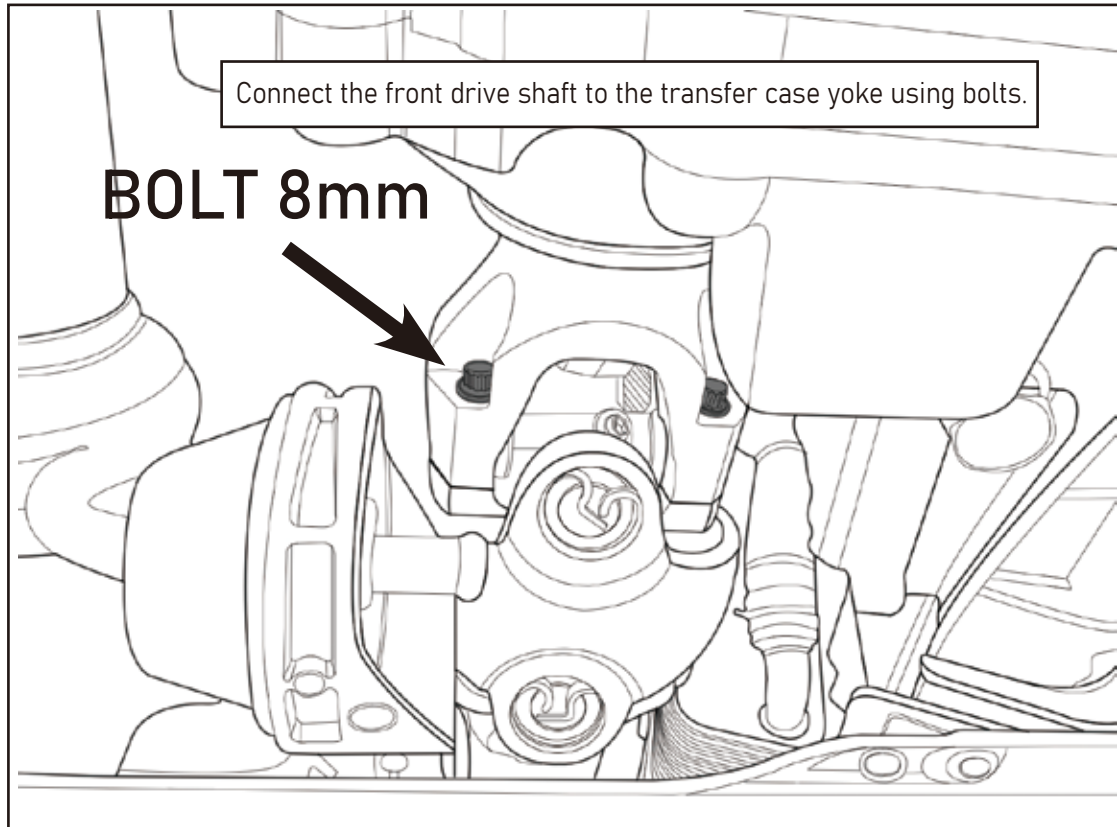


REAR SHAFT

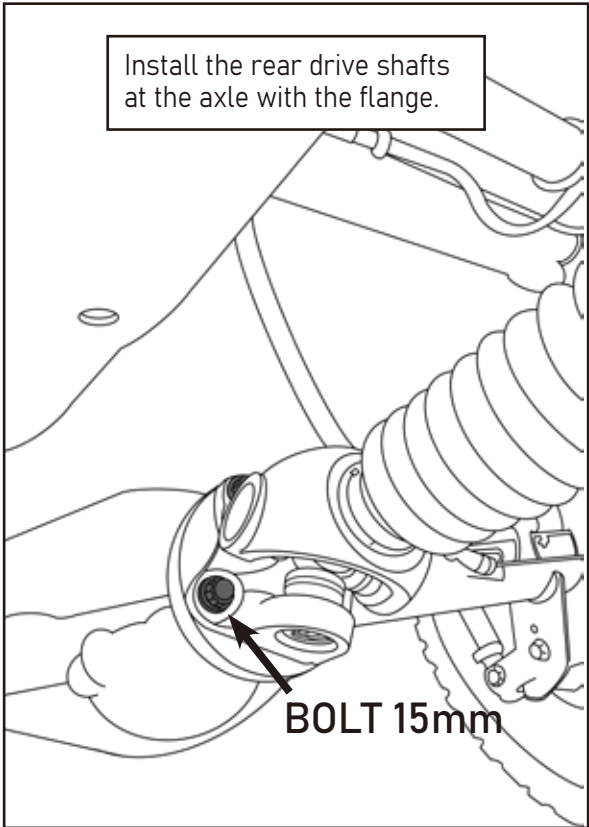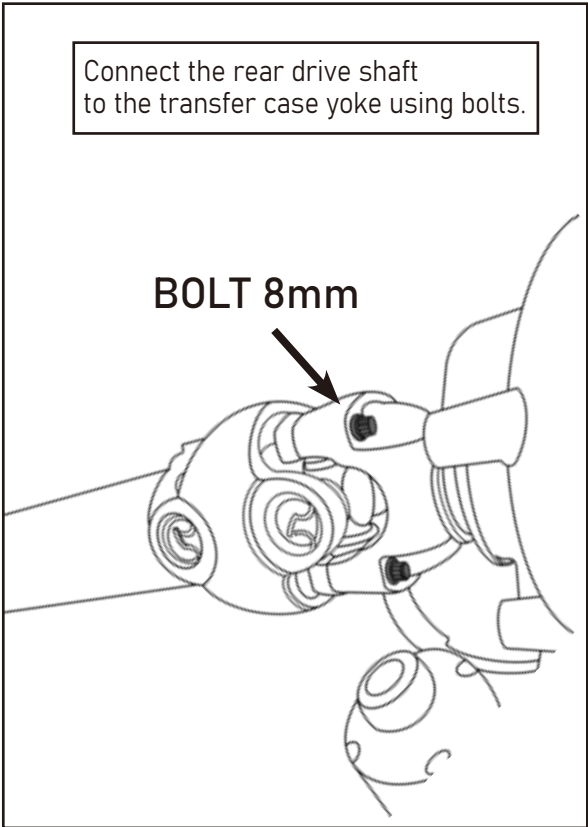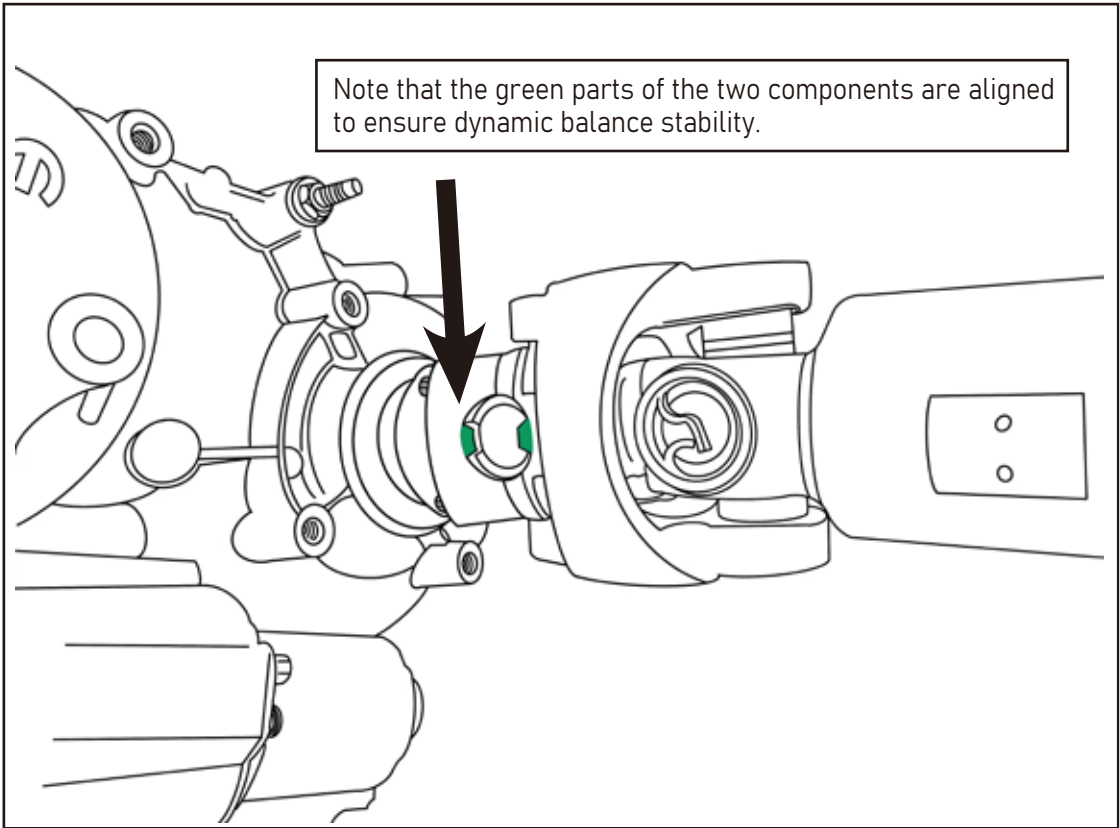


After the JEEP is lifted, the front and rear inclination angle of the axle kingpin changes, which causes the vertical angle of the drive shaft to be too large.

Maximum working angle is 20°.

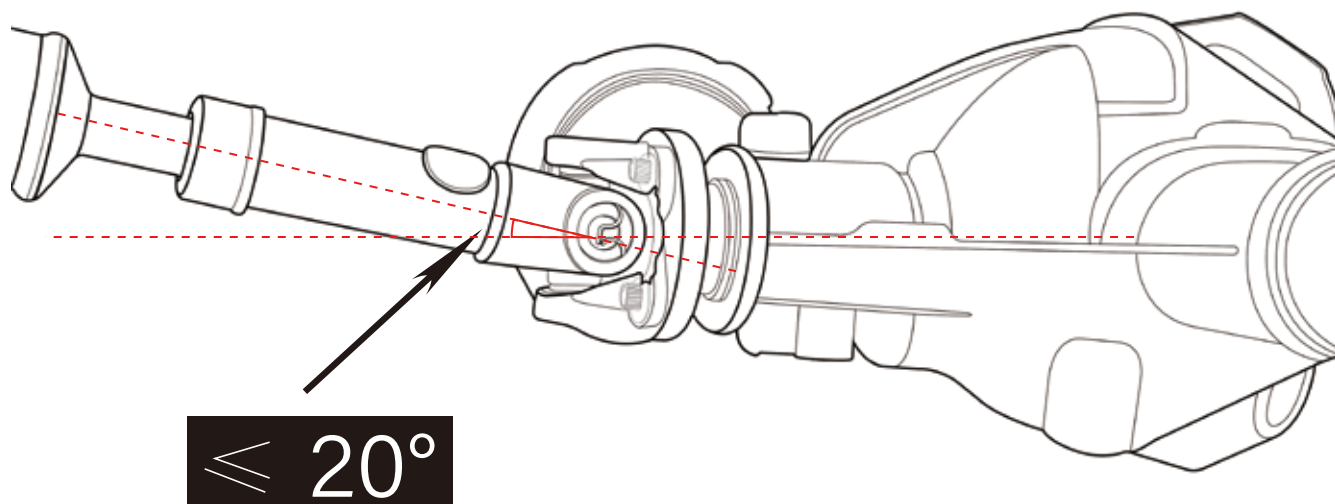


Adjustment method: Adjust by replacing the adjustable control arm (A,B) to make the axle inclination angle within the proper range.

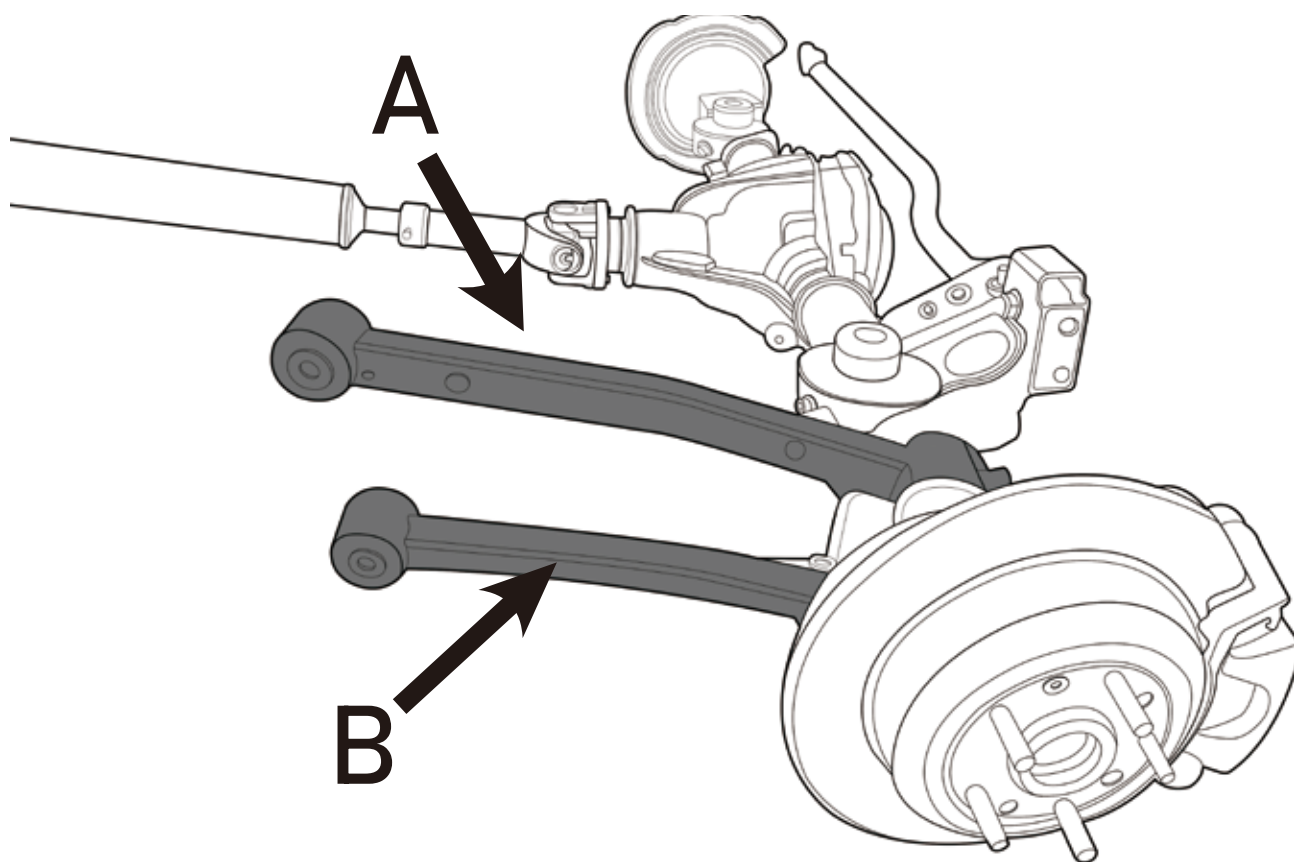


After the JEEP was lifted, the axle shifted left and right, and the inconsistency of the left and right track caused the horizontal angle of the drive shaft to shift.

The horizontal angle must be 90° .

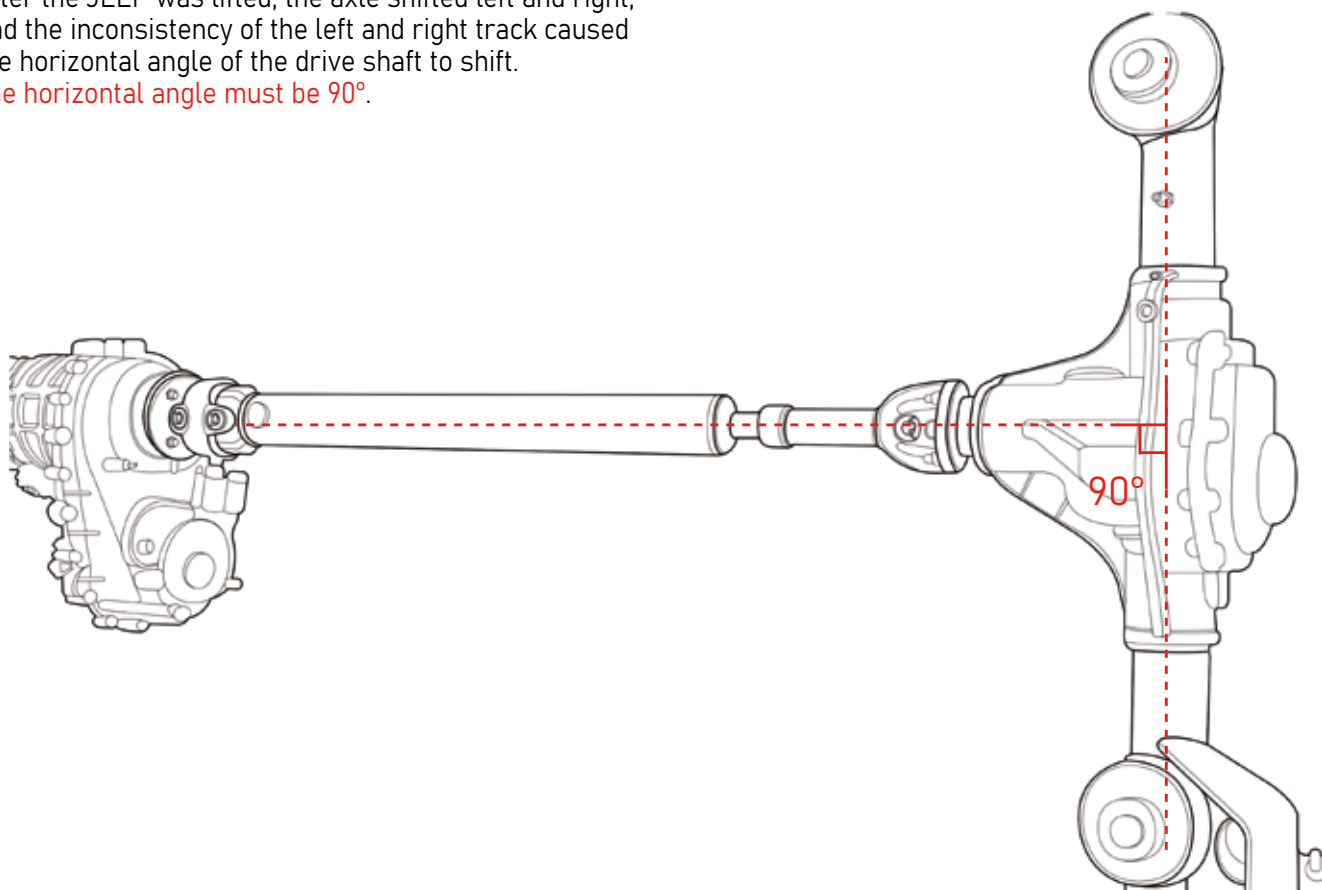

Adjustment method: Adjust by replacing the adjustable track bar(C), and adjust the left and right track to be consistent.

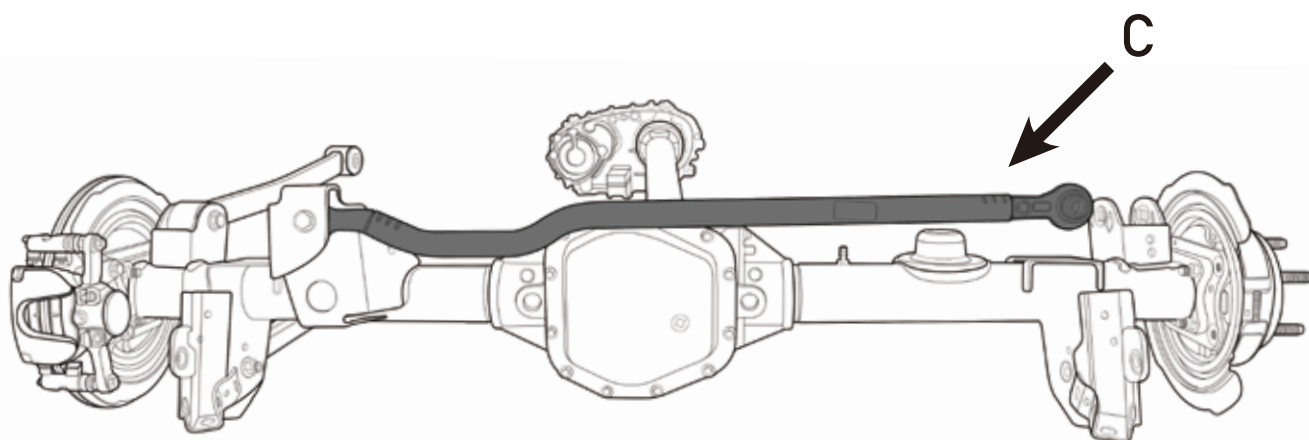



WARRANTY

POISON FROG warrants all of its products to be free from defects in workmanship and materials for periods shown herein. Within one year of warranty, obligation under this warranty is limited to repair or replacement, at poison frog option, of the defective product. Any and all costs of removal, installation, freight or incidental or consequential damages are expressly excluded from this warranty. Poison Frog is not responsible for damages and / or warranty of other vehicle parts related or non-related to the installation of poison frog product. A consumer who makes the decision to modify his vehicle with aftermarket components of any kind will assume all risk and responsibility for potential damages incurred as a result of their chosen modifications.

Please make sure that the Dealer / Installer explains and delivers all warning notices, warranty forms and instruction sheets included with poison frog product. Warranty coverage does not include consumer opinions regarding ride comfort, fitment and design. Poison Frog accepts no responsibility for any altered product. Improper installation, lack of or improper maintenance or improper use of our products. Warranty claims can be made directly with poison frog or at any factory authorized poison frog dealer.

CLAIMS NOT COVERED UNDER WARRANTY

- Parts subject to normal wear; this includes bushings, drive shafts, ball joints, bearings, seals, U-joints, tie rod ends, ball joints.
- Discontinued products at poison frog discretion.
- Exceeding one year warranty.
- Incidental or consequential damages including road side service, labor charges, loss of time or revenue loss or damage to personal property. (including loss or damage to vehicle due to failure of poison frog products).

To file a warranty claim please send email our customer service

department at pf@poisonfrogusa.com.

Closed Saturday, Sunday and all major holidays.

ROCK THE TRAIL