

ARCHITRAVE LVL GESSO ®

DESCRIPTION

Door architrave made of laminated wood (LVL, laminated veneer lumber) and then provided with a profiling and a finishing of GESSO. LVL offers several advantages over solid wood, it is stronger, straighter and more uniform. Due to its compound nature, it is much less likely to warp, twist, bend or shrink.

MATERIALS


Wood	Eucalyptus- LVL / explanation available
Glue	E1; Moisture resistant
Finishing	GESSO

DIMENSIONS

Thickness	12 mm
Length	2250 mm
Width	68 mm

WEIGHT

Density	650 kg/cbm
Density/piece	+/- 1 kg/piece
Density/packing	5 kg/pack - 5#; 1 kg/pack 1#
Dimension packing	60 mm x 68 mm x 2250 mm/5#; 12 mm x 68 mm x 2250 mm /1#

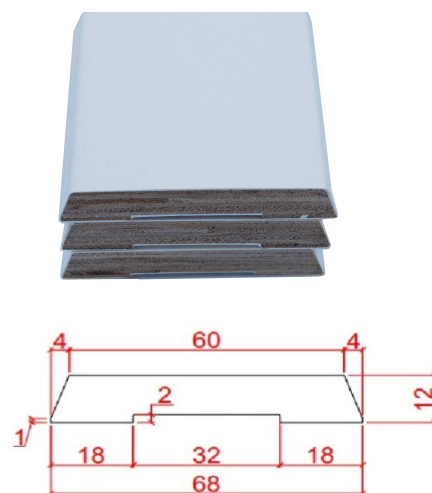

CERTIFICATIONS

EUTR/EUDR compliant, E1 - Emission

PACKING

The door architraves are neatly packed in a shrink wrap, labelled; per piece or per 5



While Treecraft strives to ensure the accuracy and relevance of all content provided, some information may become outdated or contain unintentional errors over time. We encourage you to verify key details before making decisions based on this content. Treecraft cannot be held responsible for any outcomes resulting from actions taken solely on the basis of this information.