

SKIRTING BOARD LVL HARDWOOD - PRIMED ®

DESCRIPTION

Skirting boards made of laminated wood (LVL, laminated veneer lumber) and then provided with a finishing layer of calcium silicate. LVL offers several advantages over solid wood, it is stronger, straighter and more uniform. Due to its compound nature, it is much less likely to warp, twist, bend or shrink.

MATERIALS


Wood	Eucalyptus- LVL / explanation available
Glue	E1/Moisture resistant
Finishing	Calcium silicate

DIMENSIONS

Thickness	12 mm
Length	2250 mm /custom sized
Width	65 mm

WEIGHT

Density	650 kg/cbm
Density/piece	+/- 1 kg/#
Density/packing	5 kg/pack - 5#; 1 kg/pack 1#
Dimension packing	60 mm x 65 mm x 2250 mm/5#; 12 mm x 65 mm x 2250 mm /1#

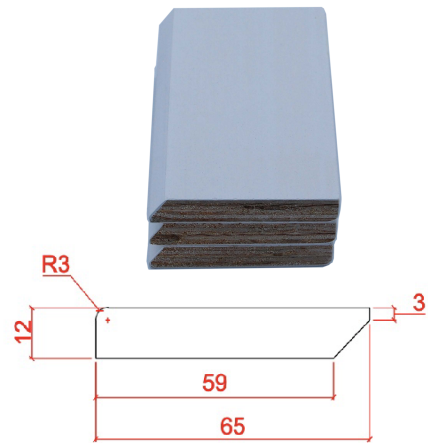


CERTIFICATIONS

EUTR/EUDR compliant; E1 - Emission

PACKING

The skirting boards are neatly packed in a shrink wrap, labelled; per piece or per 5



While Treecraft strives to ensure the accuracy and relevance of all content provided, some information may become outdated or contain unintentional errors over time. We encourage you to verify key details before making decisions based on this content. Treecraft cannot be held responsible for any outcomes resulting from actions taken solely on the basis of this information.