


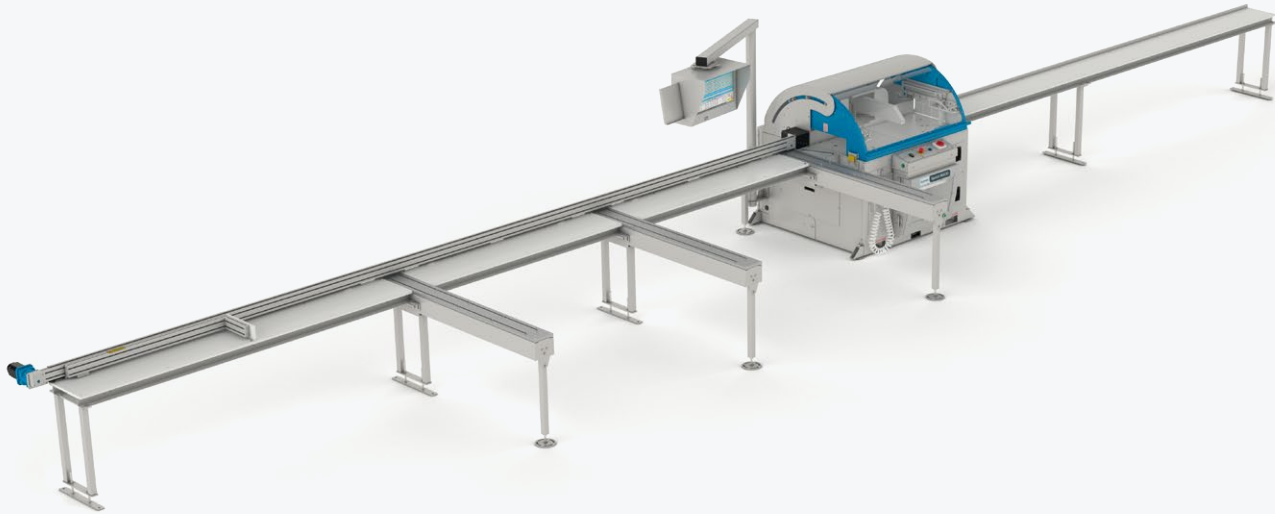


Sprint M600

SPECIFICATIONS

Overall length, width, height	46.6 x 8.2 x 6.3ft
Max lumber dimensions	15.75 x 6in
Min/Max feed lengths	0 - 20ft
Min/Max cut lengths	0 - 20ft
Working height	34.25in
Machine mass	4400lb
Operational noise	100db
Operating temperature	32 - 104°F
Blade (Dia., Bore, #Teeth)	600, 35, 100
Blade motor	7.37hp
Cutting envelope	15.75 x 6in
Min/Max radial angle cut	20 - 160°
Electrical requirement	400V 32A 3Ph+Neutral
Air requirement	0.706 CFM @ 116 psi
Dust extraction	1500CFM

* Specifications & design are subject to change, please confirm details when placing your order.

CUTTING ENVELOPE

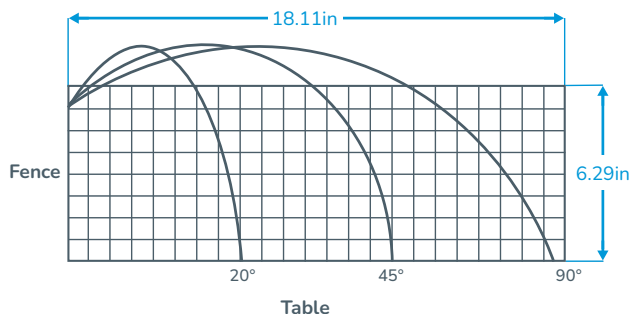

For more information, visit spida.com

OVERVIEW

The Sprint M600, with an infeed system, is designed as a smaller alternative to larger linear saws for frame member production. This saw provides an automated and accurate method of measuring, cutting and marking lumber components.

Great for optimizing all frame components from one machine. Optimize your lumber to ensure lumber waste is a thing of the past. Such a functional saw in the framing space, is the Sprint M600!

FEATURES

- 2 hand no tie down for safe cutting operation
- Central console for operator controls
- Lift up guard with automated clamps
- Braked saw motor
- Auto Feed Table
- Optimization software included and customizable to your factory requirements
- Inkjet printer
- 24" industrial touch screen
- UL Listed Industrial Control Panels



OPTIONS

- Additional blades
- Additional ink cartridges
- Left or right hand configurations
- Dust Collector
- Spares kit



See more

