




Sprint S600

SPECIFICATIONS

Overall length, width, height	44.9 x 8.2 x 6.3ft
Min/Max feed lengths	0 - 20ft
Working height	34.25in
Machine mass	1925lb
Operational noise	90db
Operating temperature	32 - 104°F
Blade (Dia., Bore, #Teeth)	600, 35, 100
Blade motor	7.37hp
Cutting envelope	15.75 x 6in
Electrical requirement	400V 32A 3Ph+Neutral
Air requirement	0.706 CFM @ 116 psi
Dust extraction	1500CFM

* Specifications & design are subject to change, please confirm details when placing your order.

CUTTING ENVELOPE

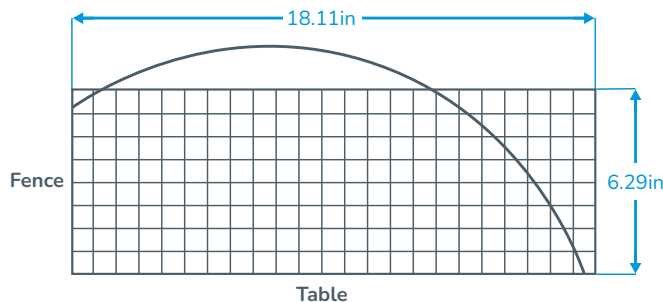

For more information, visit spida.com

OVERVIEW

The Sprint S600, with an infeed system, is designed to provide an automated and accurate method of measuring, square cutting and marking lumber components.

Great for optimizing all square cut frame components and simplifying all your panel production.

FEATURES

- 2 hand no tie down for safe cutting operation
- Central console for operator controls
- Lift up guard with automated clamps
- Easy access blade cavity for blade changes
- Braked saw motor
- Auto Feed Table
- Optimization software included and customizable to your factory requirements
- Inkjet printer
- 24" industrial touch screen
- UL Listed Industrial Control Panels



OPTIONS

- Additional blades
- Additional ink cartridges
- Left and right hand configurations
- Dust Collector
- Spares kit



See more

