


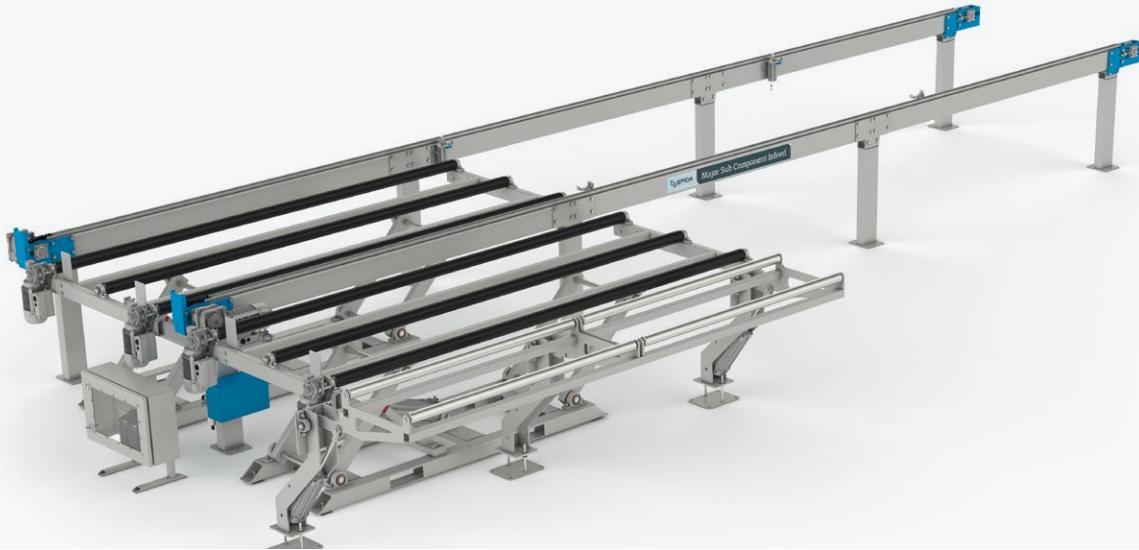

# Major Sub Component Infeed

## SPECIFICATIONS

|                                         |                    |
|-----------------------------------------|--------------------|
| Overall length (per bay), width, height | 9.8 x 13.8 x 3.6ft |
| Min/Max frame height                    | 5.5 - 12ft         |
| Working height                          | 38.5in             |
| Safe working load                       | 440lb              |
| Machine mass                            | 4400lb             |
| Operational noise                       | 50db               |
| Operating temperature                   | 32 - 104°F         |
| Electrical requirement                  | 460V 15A 3Ph       |
| Air requirement                         | 1.766CFM @ 87psi   |

\* Specifications & design are subject to change, please confirm details when placing your order.

## OVERVIEW

The Major Sub Component Infeed is paired with either a Wall Extruder or a Raked Wall Extruder. Its conveyor system is designed to transport and store pre-made lumber assemblies.

Conveyors store assemblies and pop up powered rollers transfer assemblies to the extruder operator.

## FEATURES

- Conveyors to move components from Major Sub Assembly Table
- Pop up pins on conveyors keep assemblies separated
- Pop up powered rollers
- Inside roller folds up for ease of loading major sub component assemblies to the Wall Extruder or Raked Wall Extruder
- Inside rollers fold down when not in use
- UL Listed Industrial Control Panels



## OPTIONS

- Infeed conveyor system available in both left or right configurations
- Conveyors available in different sizes and configurations as required
- Normally paired with the Major Sub Assembly Table

