


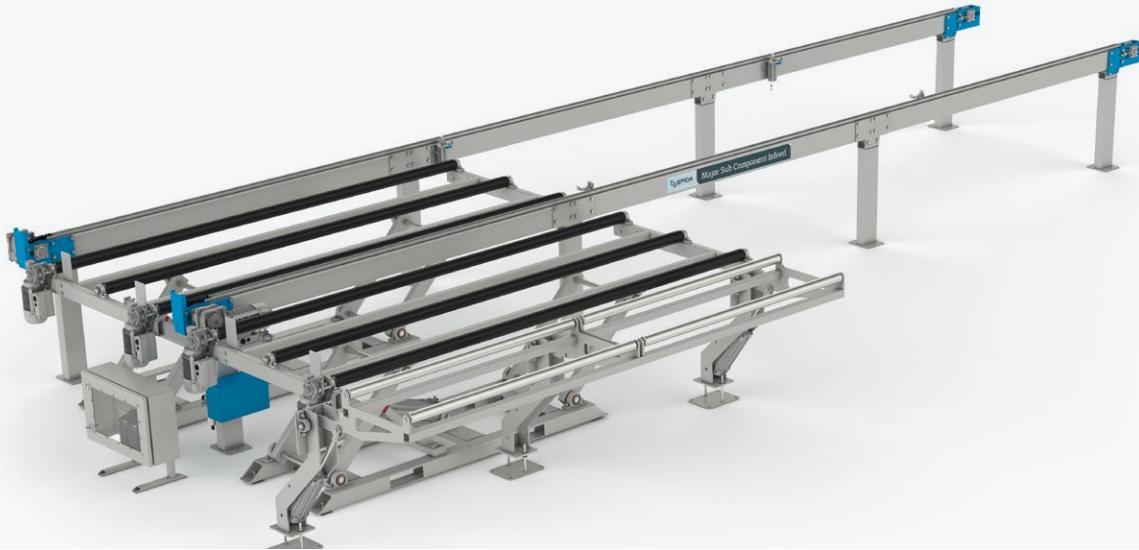

# Major Sub Component Infeed

## SPECIFICATIONS

|                               |                     |
|-------------------------------|---------------------|
| Overall length, width, height | 30.5 x 13.8 x 3.6ft |
| Bay lengths                   | 9.8ft               |
| Min/Max frame height          | 5.5 - 12ft          |
| Working height                | 38.5in              |
| Max processing weight         | 440lb               |
| Machine mass                  | 4400lb              |
| Operational noise             | 50dB                |
| Operating temperature         | 32 - 104°F          |
| Electrical requirement        | 460V 15A 3Ph        |
| Air requirement               | 1.766CFM @ 87psi    |

\* Specifications shown reflect a typical configuration. Machine design, layout and features may vary depending on final configuration and customer requirements. Details will be confirmed at the time of order.

## OVERVIEW

The Major Sub Component Infeed is used with either a Wall Extruder or a Raked Wall Extruder. Its conveyor system is designed to transport and store pre-made lumber assemblies.

Conveyors store assemblies and pop up powered rollers transfer assemblies to the extruder operator. Typically paired with the Major Sub Assembly Table for a complete system.

## FEATURES

- Conveyors to move components from Major Sub Assembly Table
- Pop up pins on conveyors keep assemblies separated
- Pop up powered rollers
- Inside roller folds up for ease of loading major sub component assemblies to the Wall Extruder or Raked Wall Extruder
- Inside rollers fold down when not in use
- UL Listed Industrial Control Panels



## OPTIONS

- Infeed conveyor system available in both left or right configurations
- Conveyors available in different sizes and configurations as required

