


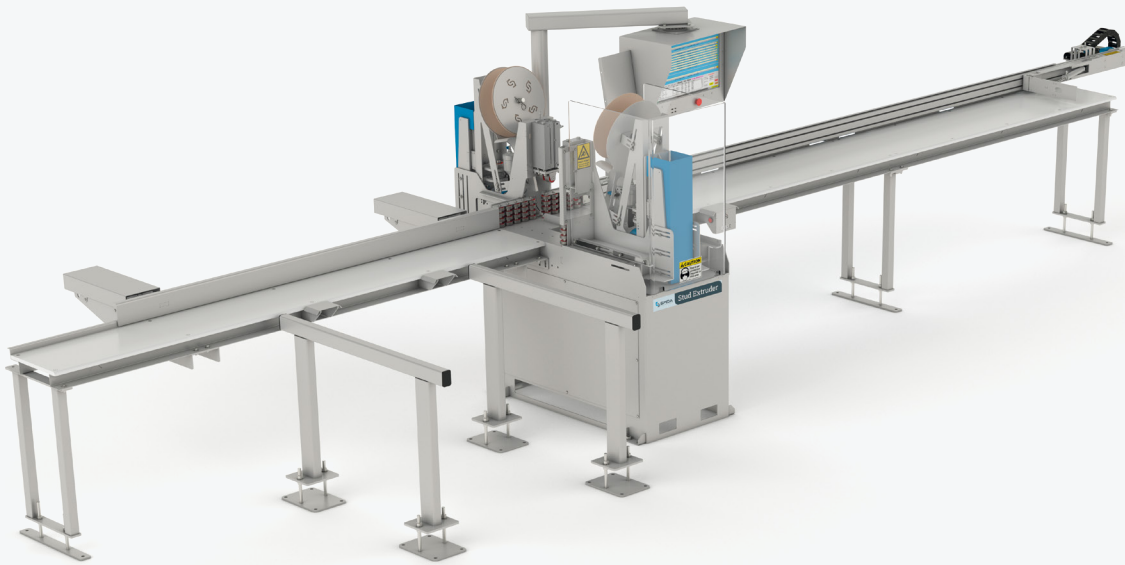

Stud Extruder

SPECIFICATIONS

Overall length, width, height	27.25 x 7.2 x 6.3ft
Max stud length	12ft
Max sub assembly width	16in
Min lumber dimension	2 x 4in
Max lumber dimension	2 x 8in
Working height	36in
Machine mass	1300lb
Operational noise	90dB
Operating temperature	32 - 104°F
Electrical requirement	400V 16A 3Ph+Neutral
Air requirement	2.119CFM @ 116psi

* Specifications shown reflect a typical configuration. Machine design, layout and features may vary depending on final configuration and customer requirements. Details will be confirmed at the time of order.

OVERVIEW

The Stud Extruder is used for the assembly of C, L and U studs along with the nailing of fireblocks to studs. This machine has been designed with both accuracy and safety in mind.

FEATURES

- Automatically nails C, L & U stud assemblies, double & triple studs, ladders and blocks
- Operator follows screen controlled process, places precut lumber in C or L configuration
- Studs are progressed through nailer and automatically nailed at specified nail centers
- Studs up to 11.8ft long can be nailed
- High capacity nail coil holders
- Nail usage counter - alerts operator when nails need to be replaced
- Compatible with wide range of standard industry data exports
- 24" industrial touch screen
- UL Listed Industrial Control Panels



OPTIONS

- Left or right hand configuration
- Infeed table lengths - 16ft or 20ft

