


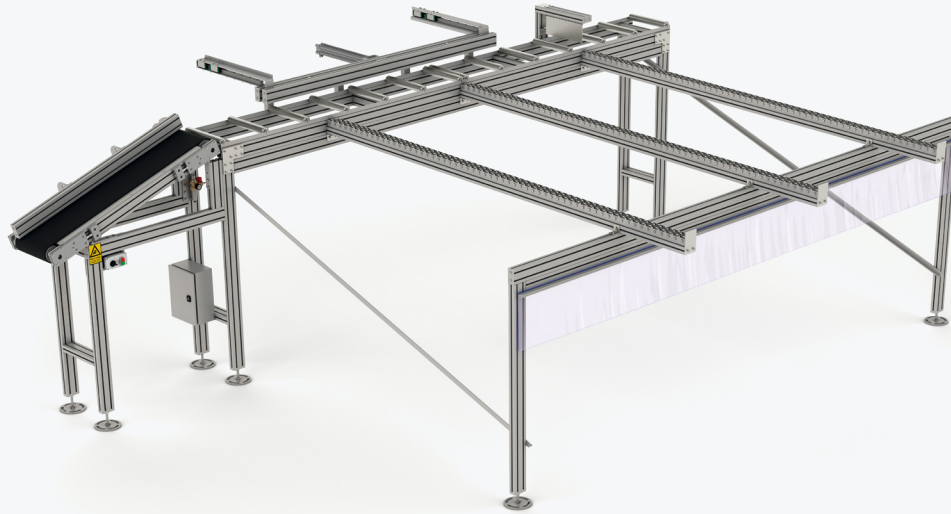

Conveyor Overframe and Pusher

SPECIFICATIONS

Overall length, width, height	17.6 x 13.1 x 5.7ft
Max stud length	12ft
Working height	58.25in
Max processing weight	330lb
Machine mass	880lb
Operational noise	50dB
Operating temperature	32 - 104°F
Electrical requirement	460V 8A 3Ph
Air requirement	0.706CFM @ 87psi

* Specifications shown reflect a typical configuration. Machine design, layout and features may vary depending on final configuration and customer requirements. Details will be confirmed at the time of order.

OVERVIEW

The Conveyor Overframe and Pusher is used for an automated process to feed a range of stud combinations including C's & L's to the Wall Extruder from the Stud Extruder.

This allows fast and accurate material handling from one process to another, to improve production efficiency.

FEATURES

- Automatically conveys assembled studs over framing line and presents them to the operator in the correct orientation
- UL Listed Industrial Control Panels

