


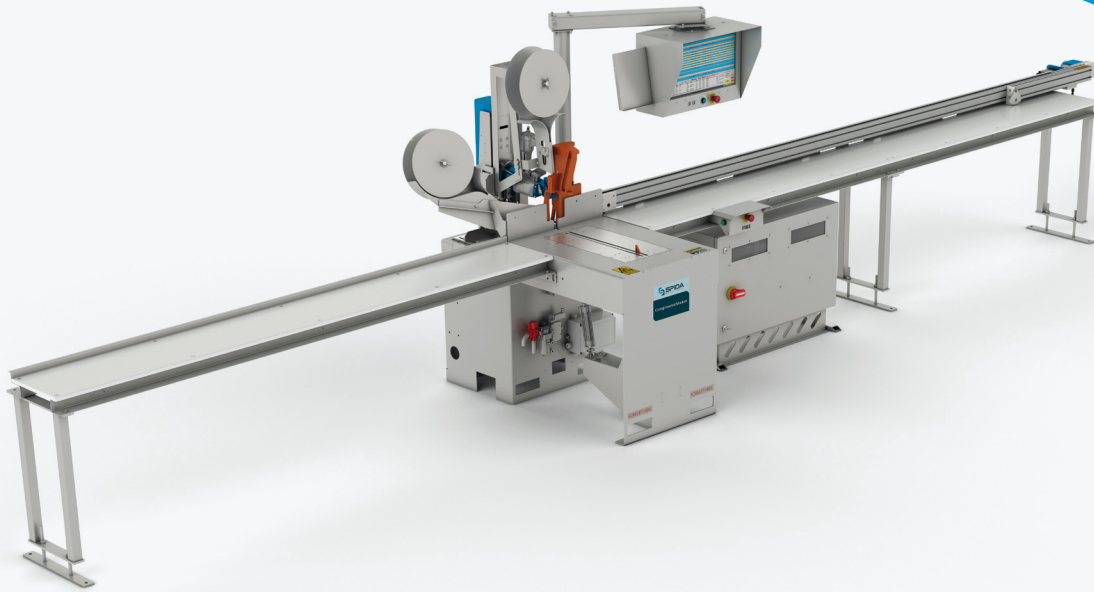

ComponentMaker

SPECIFICATIONS - ALL MODELS

Max attachment length	7ft 2.6in
Min lumber dimensions	2 x 4in
Max lumber dimensions	2 x 8in
Working height	36in
Max processing weight	440lb
Operational noise	90dB
Operating temperature	32 - 104°F
Electrical requirement	400V 10A 3Ph+Neutral
Air requirement	4.24CFM @ 116psi

SPECIFICATIONS - 4.8 MODEL

Overall length, width, height	26.75 x 4.7 x 6.3ft
Max component stock length	12ft
Machine mass	2080lb

SPECIFICATIONS - 4.8 MODEL

Overall length, width, height	33.6 x 4.7 x 6.3ft
Max component stock length	16ft
Machine mass	2200lb

SPECIFICATIONS - 6.0 MODEL

Overall length, width, height	40.85 x 4.7 x 6.3ft
Max component stock length	20ft
Machine mass	2320lb

* Specifications shown reflect a typical configuration. Machine design, layout and features may vary depending on final configuration and customer requirements. Details will be confirmed at the time of order.

For more information, visit spida.com

OVERVIEW

The ComponentMaker is designed to accurately nail lumber components together before frame assembly. The nailer clamps and nails one nog at a time onto a stud as required. It can handle both standard nogs and flat nogs, even on the same stud - the ComponentMaker automatically adjusts the nail gun orientation and clamps to suit.

Use the ComponentMaker for the following assemblies: nailing fire blocking to studs in single or multiple locations, nailing flat/cabinet blocking to studs in single or multiple locations, nailing cripples/jacks to headers or nailing cripples/jacks to sills.

FEATURES

- Caters from 2x4in to 2x8in lumber
- Nog clamps keep operator's hands out of nailing area
- Safety isolation of nail gun firing on clamps to make sure lumber is present and is the correct size and orientation
- Capability to nail flat and vertical attachment orientations
- 2 hand safety operation
- High capacity nail coil holders
- Nail usage counter - alerts operator when nails need to be replaced
- Compatible with a wide range of standard industry data exports
- 24" industrial touch screen
- UL Listed Industrial Control Panels



OPTIONS

- Left or right hand configuration
- Infeed table lengths - 16ft or 20ft



See more

