


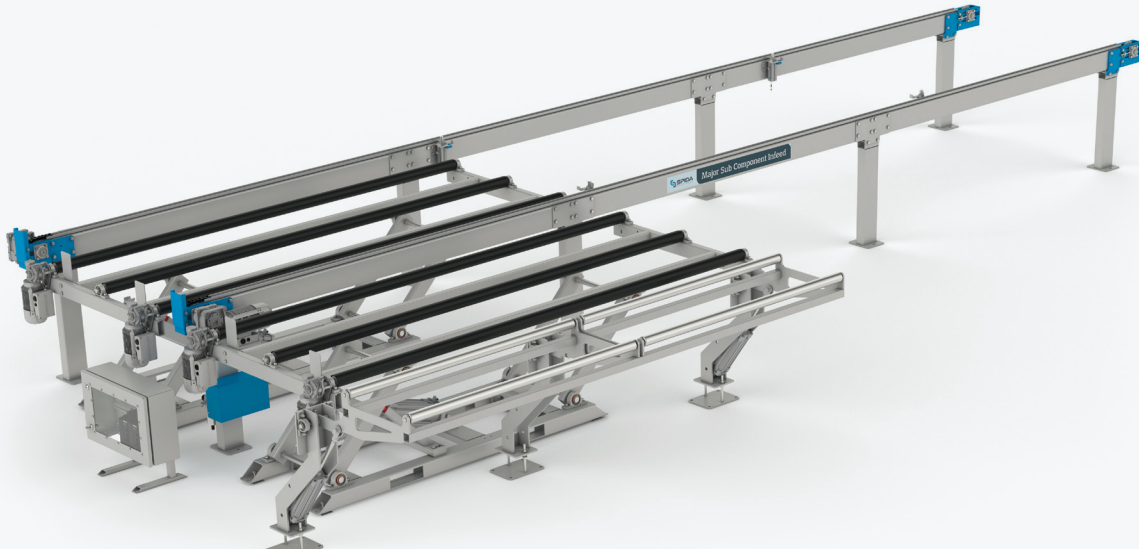

Major Sub Component Infeed

SPECIFICATIONS

Overall length, width, height	30.5 x 13.8 x 3.6ft
Bay lengths	9.8ft
Min/Max frame height	5.5 - 12ft
Working height	38.5in
Max processing weight	440lb
Machine mass	4400lb
Operational noise	50dB
Operating temperature	32 - 104°F
Electrical requirement	460V 15A 3Ph
Air requirement	1.766CFM @ 87psi

* Specifications shown reflect a typical configuration. Machine design, layout and features may vary depending on final configuration and customer requirements. Details will be confirmed at the time of order.

OVERVIEW

The Major Sub Component Infeed is used with either a Wall Extruder or a Raked Wall Extruder. Its conveyor system is designed to transport and store pre-made lumber assemblies.

Conveyors store assemblies and pop up powered rollers transfer assemblies to the extruder operator. Typically paired with the Major Sub Assembly Table for a complete system.

FEATURES

- Conveyors to move components from Major Sub Assembly Table
- Pop up pins on conveyors keep assemblies separated
- Pop up powered rollers
- Inside roller folds up for ease of loading major sub component assemblies to the Wall Extruder or Raked Wall Extruder
- Inside rollers fold down when not in use
- UL Listed Industrial Control Panels



OPTIONS

- Infeed conveyor system available in left or right hand configuration
- Conveyors available in different sizes and configurations as required

