




SnipSaw 600

SPECIFICATIONS

Overall length, width, height	970 x 1130 x 1200mm
Max timber dimensions	400 x 150mm
Max feed lengths	6000mm
Working height	870mm
Max processing weight	180kg
Machine mass	320kg
Operational noise	90dB
Operating temperature	0 - 40°C
Blade (Dia., Bore, #Teeth)	600, 35, 100
Blade motor	5.5kW
Cutting envelope	400 x 150mm
Electrical requirement	400V 25A 3Ph+Neutral
Air requirement	10L/min @ 8 Bar
Dust extraction	42000L/min

* Specifications shown reflect a typical configuration. Machine design, layout and features may vary depending on final configuration and customer requirements. Details will be confirmed at the time of order.

CUTTING ENVELOPE

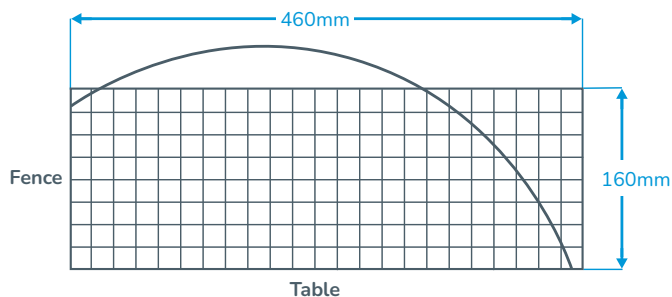

For more information, visit spida.com

OVERVIEW

The SnipSaw 600 is designed to provide a pneumatically operated clamping and cutting cycle, which docks to length. The design also has safety in mind as the operator's hands are kept clear of the cutting area.

FEATURES

- Components of various lengths can be cut with the saw
- Automated pop up safety guard for safe cutting of timber components
- 2 hand safety operation for safe cutting

OPTIONS

- Customisable table lengths in 1000mm increments from 2000mm onwards are available upon request
- Saw can be paired with any available type of table as required, automated or manual

