




SnpSaw 600

SPECIFICATIONS

Overall length, width, height	3.2 x 3.7 x 3.9ft
Max timber dimensions	15.75 x 6in
Max feed lengths	20ft
Working height	34.25in
Max processing weight	400lb
Machine mass	700lb
Operational noise	90dB
Operating temperature	32 - 104°F
Blade (Dia., Bore, #Teeth)	600, 35, 100
Blade motor	7.37hp
Cutting envelope	15.75 x 6in
Electrical requirement	400V 25A 3Ph+Neutral
Air requirement	0.353CFM @ 116 psi
Dust extraction	1500CFM

* Specifications shown reflect a typical configuration. Machine design, layout and features may vary depending on final configuration and customer requirements. Details will be confirmed at the time of order.

CUTTING ENVELOPE

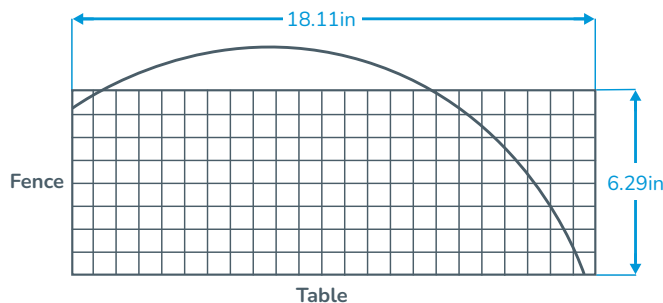

For more information, visit spida.com

OVERVIEW

The SnpSaw 600 is designed to provide a pneumatically operated clamping and cutting cycle, which docks to length. The design also has safety in mind as the operator's hands are kept clear of the cutting area.

FEATURES

- Components of various lengths can be cut with the saw
- Automated pop up safety guard for safe cutting of lumber components
- 2 hand safety operation for safe cutting
- UL Listed Industrial Control Panels



OPTIONS

- Customizable table lengths in 3.3ft increments from 6.6ft onwards are available upon request
- Saw can be paired with any available type of table as required, automated or manual

