


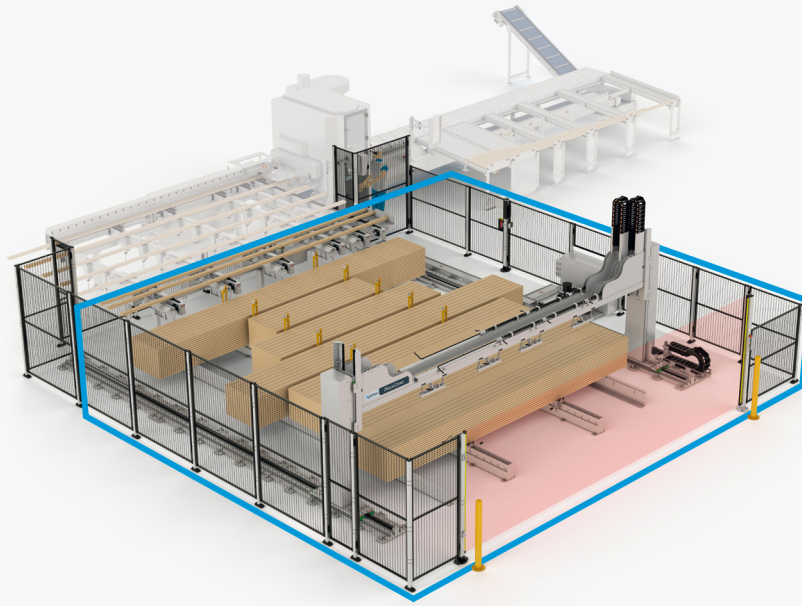

PieceGiver

SPECIFICATIONS - ALL MODULES

Min lumber dimensions	2.76 x 1.38in
Max lumber dimensions	11.81 x 1.77in
Min/Max feed lengths	94.49 – 236.22in
Electrical requirement	400V 32A 3Ph + Neutral & Earth
Air requirement	1.413CFM avg. 17.657CFM Peak @ 100psi (PieceGiver) 8.829CFM avg. 18.54CFM Peak @ 100psi (Bow Flipper)* *The Bow Flipper is connected to the PieceMaker infeed deck

SPECIFICATIONS - 1 MODULE

Overall length, width, height	25.88 x 29.32 x 10.17ft
Machine mass	9370lb
Usable distance for lumber picking	10.99ft

SPECIFICATIONS - 2 MODULE

Overall length, width, height	34.6 x 29.32 x 10.17ft
Machine mass	11685lb
Usable distance for lumber picking	19.60ft

SPECIFICATIONS - 3 MODULE

Overall length, width, height	43.07 x 29.32 x 10.17ft
Machine mass	14000lb
Usable distance for lumber picking	28.22ft

SPECIFICATIONS - 4 MODULE

Overall length, width, height	51.80 x 29.32 x 10.17ft
Machine mass	16314lb
Usable distance for lumber picking	36.83ft

For more information, visit spida.com

OVERVIEW

Optimize your cutting operations, increase machine runtime and reduce repetitive injury by introducing the PieceGiver to your workflow. Load the lumber trolleys and let the system do the rest.

FEATURES

- Fast, accurate lumber delivery
- Features a low lumber warning system
- Camber is checked as the lumber is being picked and flipped on the infeed deck if required
- Picks a variety of lumber and sizes up to 11.81 x 1.77 LVL
- Safety light curtain and fenced to protect operator
- Retrofittable to any PieceMaker saw
- Picks and delivers 2 lengths of lumber during each pass
- 1 person operation for PieceGiver and PieceMaker

OPTIONS

- Suit left or right hand feed PieceMaker
- End or side loading
- Customizable bunker quantity depending on your stock requirements
- Slim (29.5in) and wide (52in) lumber carrier options available
- Additional spare lumber bunk carriers

* The PieceGiver does not include the PieceMaker - this is a separate product which is shown greyed out in the above image.

* Specifications shown reflect a typical configuration. Machine design, layout and features may vary depending on final configuration and customer requirements. Details will be confirmed at the time of order.



See more

