


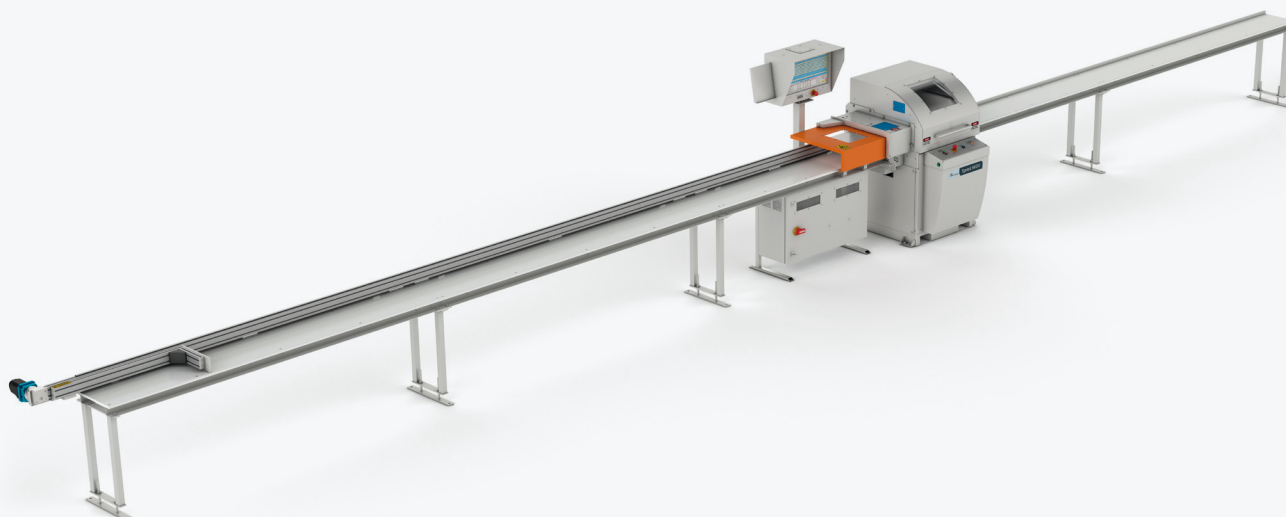


Sprint S600

SPECIFICATIONS

Overall length, width, height	14340 x 1190 x 1780mm
Max timber dimensions	400 x 150mm
Max feed lengths	6500mm
Min/Max cut lengths	1 - 6500mm
Working height	870mm
Max processing weight	180kg
Machine mass	1650kg
Operational noise	90dB
Operating temperature	0 - 40°C
Blade (Dia., Bore, #Teeth)	600, 35, 100
Blade motor	5.5kW
Cutting envelope	400 x 150mm
Electrical requirement	400V 25A 3Ph+Neutral
Air requirement	20L/min @ 7 Bar
Dust extraction	42000L/min

* Specifications shown reflect a typical configuration. Machine design, layout and features may vary depending on final configuration and customer requirements. Details will be confirmed at the time of order.

CUTTING ENVELOPE

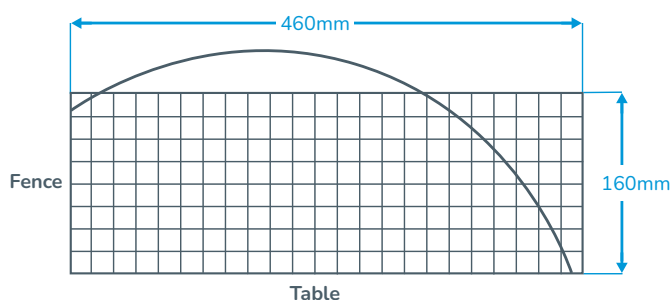

For more information, visit spida.com

OVERVIEW

The Sprint S600 is a dedicated wall frame component cutting saw that delivers fast, accurate and automated measuring, square cutting and marking of framing timber.

Combining precision cutting technology with optimisation software, it helps maximise timber recovery, minimise waste, increase throughput, and improve overall efficiency.

With a compact footprint and straightforward operation, the Sprint S600 offers reliable automation without the complexity or space requirements of larger systems.


FEATURES

- Central console for operator controls
- Safety infeed tunnel
- Interlocked lift up lid with automated clamps
- Easy access blade cavity for blade changes
- Braked saw motor
- 2 hand safety operation for safe cutting
- Optimisation software included and customisable to your factory requirements
- Inkjet printer
- 24" industrial touch screen
- Cutting accuracy factory tested to +/- 0.5mm

OPTIONS

- Left and right hand configuration
- Dust Collector

SAMPLE TIMBER PRINTING



See more

