


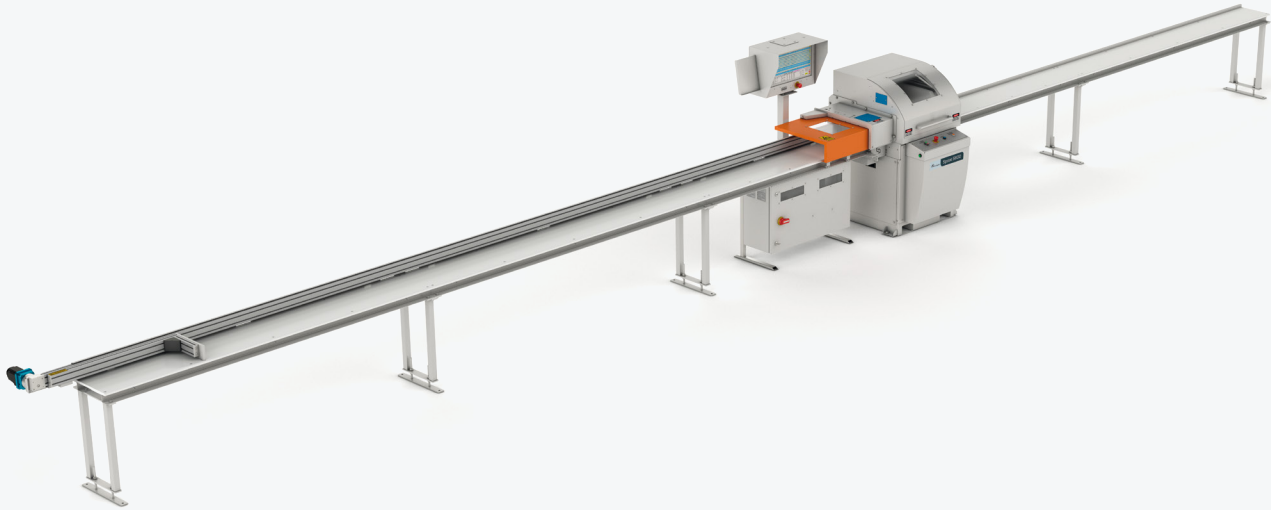


Sprint S600

SPECIFICATIONS

Overall length, width, height	47 x 4 x 5.9ft
Max timber dimensions	15.75 x 6in
Max feed lengths	20ft
Min/Max cut lengths	1 - 20ft
Working height	34.25in
Max processing weight	400lb
Machine mass	3640lb
Operational noise	90dB
Operating temperature	32 - 104°F
Blade (Dia., Bore, #Teeth)	600, 35, 100
Blade motor	7.37hp
Cutting envelope	15.75 x 6in
Electrical requirement	400V 25A 3Ph+Neutral
Air requirement	0.706 CFM @ 116 psi
Dust extraction	1500CFM

* Specifications shown reflect a typical configuration. Machine design, layout and features may vary depending on final configuration and customer requirements. Details will be confirmed at the time of order.

CUTTING ENVELOPE

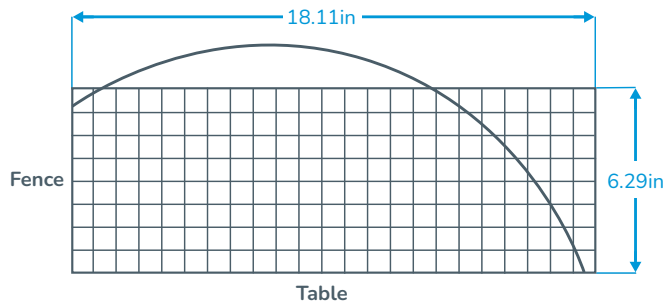

For more information, visit spida.com

OVERVIEW

The Sprint S600 is a dedicated wall frame component cutting saw that delivers fast, accurate and automated measuring, square cutting and marking of framing lumber.

Combining precision cutting technology with optimization software, it helps maximize lumber recovery, minimize waste, increase throughput, and improve overall efficiency.

With a compact footprint and straightforward operation, the Sprint S600 offers reliable automation without the complexity or space requirements of larger systems.

FEATURES

- Central console for operator controls
- Safety infeed tunnel
- Interlocked lift up lid with automated clamps
- Easy access blade cavity for blade changes
- Braked saw motor
- 2 hand safety operation for safe cutting
- Optimization software included and customizable to your factory requirements
- Inkjet printer
- 24" industrial touch screen
- UL Listed Industrial Control Panels
- Cutting accuracy factory tested to +/- 0.02"



OPTIONS

- Left and right hand configuration
- Dust Collector

SAMPLE TIMBER PRINTING



See more

