


SOLUTION BLUEPRINT DO-2: DIODE MULTI-OVERLAY

Disconnect
to protect
on demand

FireBreak protection to allow OT patch updates in Data Diode protected domains

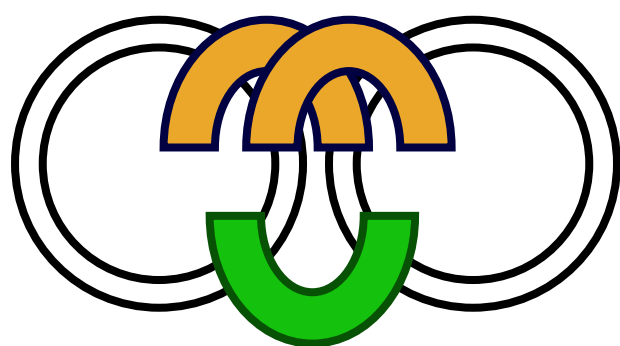

Name Diode Multi-overlay control

Application OT environments

Sectors Utility, CNI, Defense, Manufacturing

Description The **FIRST** Firebreak is positioned across the Data Diode in order to allow timed daily access to OT zone for admin and software.

The **SECOND** FireBreak is in series with the first, allows a Firewall/SIEM decision to override timed access in times of heightened threat.

