



FL



Seal Arrangements

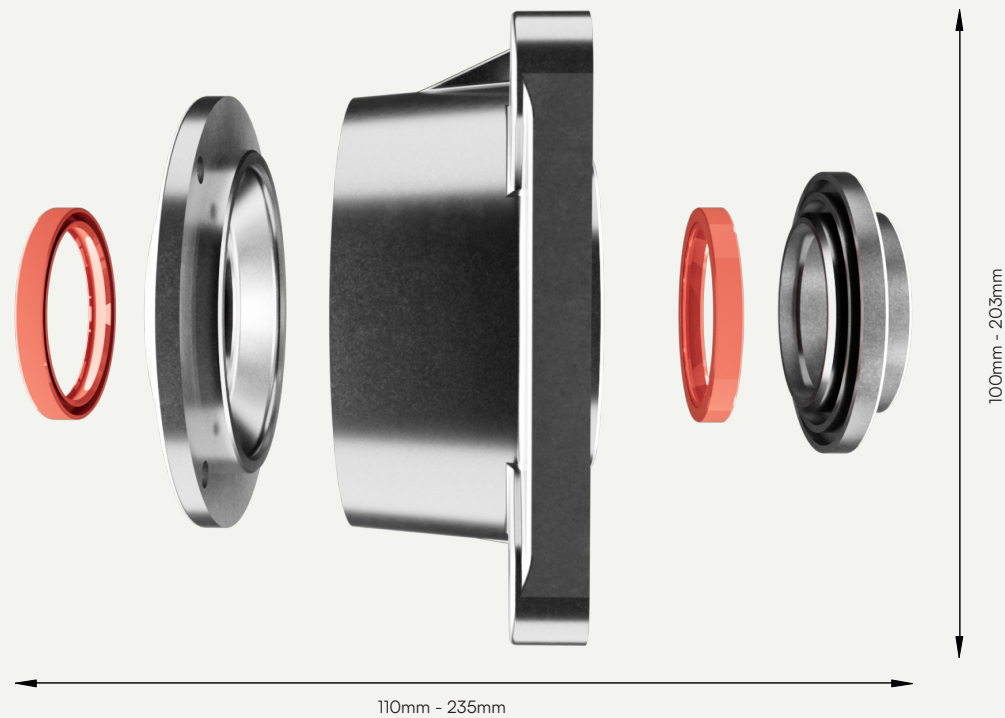

-  Ideally suited
-  Suitable
-  Less suitable
-  Unsuitable

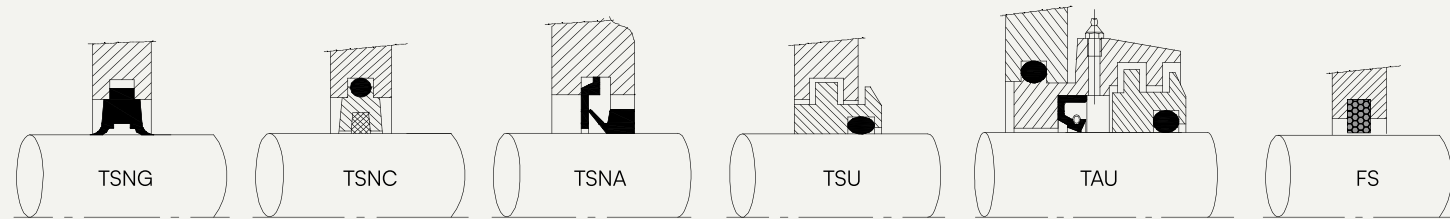

TSNG
SNGH
FCMG
SFCM
SOSPG

TSNC
SNGH
FCMG
SFCM
SOSPG


TSNA
SNGH
FCMG
SFCM
SOSPG

TSU
SNGH
FSCM
SD/SN


TAU
SNGH
FSCM
SD/SN

FS
722500
FCM/SN



	°C m/s	TSNG	TSNC	TSNA	TSU	TAU	FS
Max grade		..-40..100°C ..<8m/s .0,5..1°	..-40..100°C ..<15m/s <0,5°	..-40..100°C ..<7m/s <..1...1,5°	..-40..+200°C ..<15m/s <0,3°	..-40..+100°C ..<10m/s <0,5°	..-40..+100°C ..<15m/s <0,5°
Relubricateable							
Friction							
Axial displacement							
Vertical installation							
Spray water							
Fine dust							
Dust							
Rough particle							
Sharp particle							
UV resistance							




722500





722500-G




722500
FCM




722500-G
FCMG



FCM-LS




FL
FCM-LOR



Flanged bearing

„Flanged bearing housings designed for self-aligning ball bearings or spherical roller bearings on an adapter sleeve. The bearing seat within the housing is machined to tolerance class G7, and the standard material used is cast iron. Customization options include the use of alternative materials. Equipped with felt seals, these housings are designed for grease lubrication.“

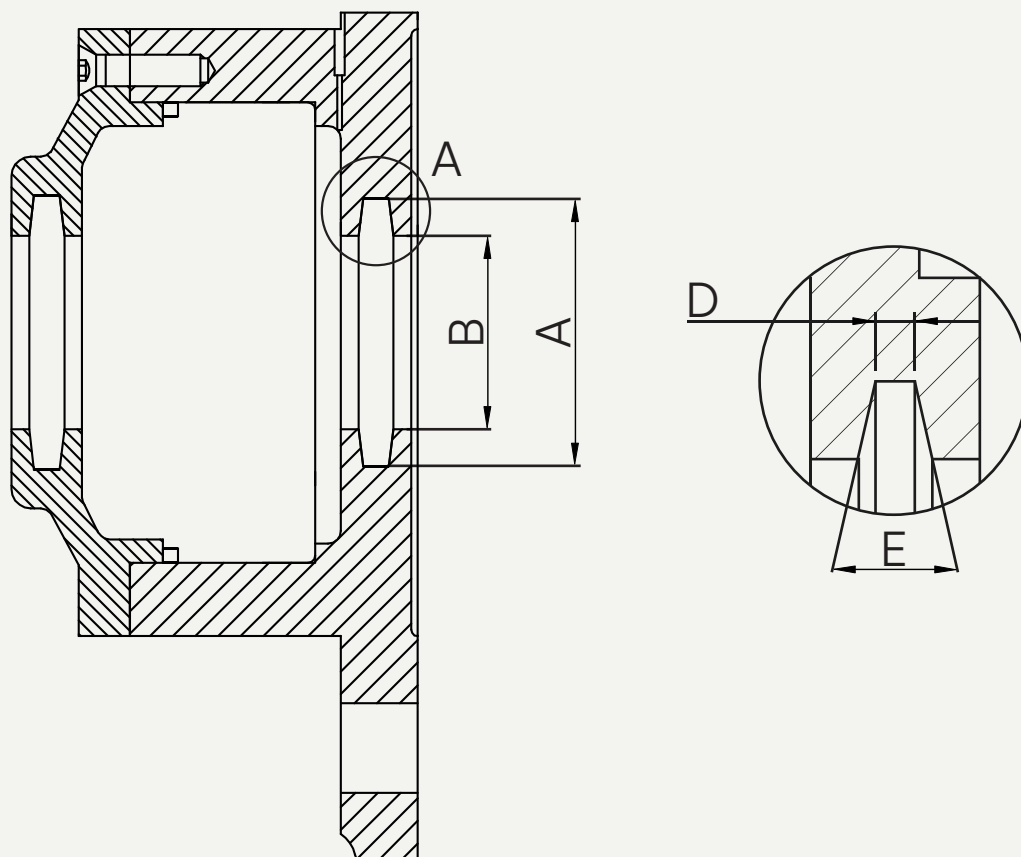

	A	B	D
722506	38	26,5	4
722507 - 607	43	31,5	4
722508 - 608	48	36,5	4
722509 - 609	53	41,5	4
722510 - 610	58	46,5	4
722511 - 611	67	51,5	5
722512 - 612	72	56,5	5
722513 - 613	77	62	5
722515 - 615	82	67	5
722516 - 616	89	72	6
722517 - 617	94	77	6
722518 - 618	99	82	6
722519 - 619	104	87	6
722520 - 620	111	92	7
722522 - 622	125	102	8



The flanged bearing housings are designed for the mounting of self-aligning ball bearings or self-aligning roller bearings on adapter sleeves. The bearing seat inside the housing is precision-machined to the G7 tolerance class. As the standard option, these housings are manufactured from gray cast iron. However, upon request, we can also supply housings made from other materials. The housings come equipped with felt seals and are designed for grease lubrication. Additionally, we offer a wide assortment of variations with different sealing options to cater to your specific needs.

**722500 / FCM500
FCMG500 / 722500G
SFCM / FCM500LS
FCM500LOR / FL**







3kg - 69kg



35mm - 175mm



4m/s - 30m/s

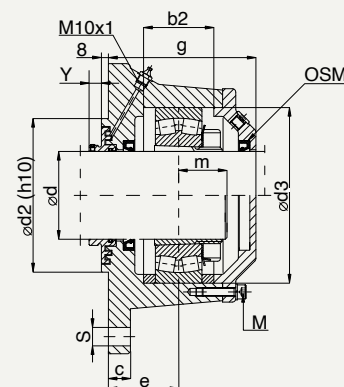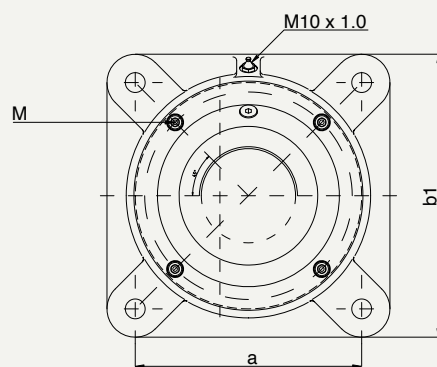

Article	d	a	b1	b2	c	d2	d3	e	f	g	m	u	S	M	Kg	FR	Qty	OSM	LS-Seal	O-Ring	Bearing	Sleeve	Grease in gr.	Y
FL40	40	110	150	31	20	95	85	43,5	13	93	30	13	13	M6	8	2xFR85x6	2	40x52x7	LS40	40x4	22209K	H309	50	22
FL50	50	130	170	37	20	110	100	45,5	13	95	30	13	13	M8	10	2xFR100x6	2	50x65x8	LS50	50x4	22211K	H311	60	22
FL65	65	160	210	47	25	125	130	52,5	17	108	35	17	17	M8	17	2xFR130x8	2	65x80x8	LS65	65x4	22215K	H315	250	22
FL80	80	190	235	60	25	140	160	62	17	130	45	17	17	M10	27	2xFR160x10	2	80x100x10	LS80	80x4	22218K	H318	400	22
FL100	100	240	300	80	25	175	200	80	21	163	55	21	21	M10	50	2xFR200x13,5	2	100x125x12	LS100	100x4	22222K	H322	650	22
FL125	125	270	318	78	20	200	250	62	22	161	65	22	22	M10	63	2xFR250x10	2	125x150x12	LS125	125x4	22228K	H3128	1400	20



THIS IS HOW YOU REACH US

GLH GMBH

Heinrich-Hertz-Straße 4
22941 Bargteheide, Germany
Tel. +49 - 4532-280-753-0
www.glh24.de

WHAT WE OFFER

SHIPPING UNTIL 17:00 UHR

Daily Forwarding shipment,
parcel shipment with **UPS, DHL,**
FEDEX, NIGHT STAR
Roller bearings, Plummer Blocks,
Flanged Bearings, Plain Bearings,
Adapter and withdrawal Sleeves, Seals