BEAM 800 | SCONCE

PRODUCT PHOTOGRAPHY & SPECIFICATIONS

CARLISLE COLLECTIVE

BY ENTRELACS





DIMENSIONS

Height: 31.496″ (800 mm)
Width: 4.435″ (112.7 mm) | Projection: 3.998″ (101.5 mm)
Tube diameter: 1.969″ (50 mm)
Mounting-body height: 4.837″ (122.9 mm)

MATERIAL & ORIGIN

Solid bronze. Hand-made in France.

LIGHT SOURCE

LED COB | 8 W | 2 × 311 lumens | CRI 95

COLOR TEMPERATURE

2700K standard; 3000K, 3500K or 4000K available at no upcharge.

POWER & DIMMING

120–277 VAC, 50–60 Hz; supplied document designated 220V.
Phase-cut / TRIAC or 0–10V: internal driver.
DALI: remote driver. Confirm selected configuration.

PROTECTION & WEIGHT

IP65 | 3.9 kg (8.6 lb)

FINISHES

Raw bronze, medium bronze or black bronze.
Brushed nickel: special finish with upcharge.
Custom finishing upon request.


BEAM 800 | SCONCE

DIMENSIONED DRAWINGS & FINISH OPTIONS

CARLISLE COLLECTIVE

BY ENTRELACS

MANUFACTURER DIMENSIONED DRAWINGS

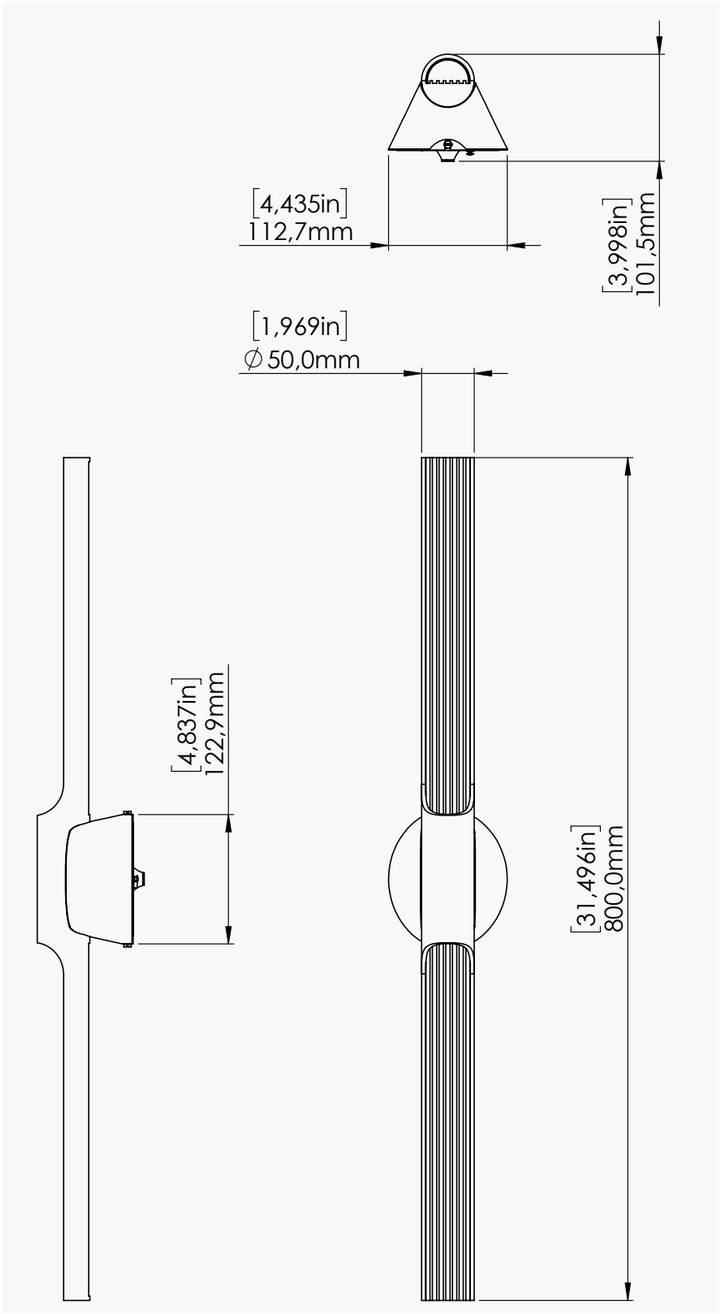

STANDARD BRONZE PATINAS



RAW BRONZE

FNRB



MEDIUM BRONZE

FNMB



BLACK BRONZE

FNBK

SPECIAL FINISH



BRUSHED NICKEL | FNBN

Available with upcharge.
Custom finishing upon request.

Drawings and finish samples reproduced from the manufacturer’s supplied specification sheet, dated October 30, 2025.

Installation, wiring, driver information, care instructions and the declaration of conformity are retained in the companion manufacturer reference PDF.