OTTO LUCE | CHANDELIER

PRODUCT PHOTOGRAPHY & SPECIFICATIONS

CARLYLE COLLECTIVE

BY CAROLYN CARTWRIGHT

Otto Luce has a solid brass armature with handblown gilded glass shades for atmospheric light. Arms rotate into position from center axis.

SPECIFICATIONS

DIMENSIONS

Largest width 56 5/8 in; smallest width 44 5/8 in; minimum overall height 27 in; fixture height 15 in; stem height minimum 12 in, variable

WEIGHT

Varies slightly; 4 tier fixture approx. 40 lbs

MATERIALS

Shades: Alabaster glass globes, gold foil wrap; also available in Smoked Quartz, gold foil wrap; bespoke options available. Frame: armature architectural bronze. Tiers: two to four tiers. Canopy: heavy gauge spun brass. Stem: architectural bronze

LAMPING

Per tier, US/Canada: (2) incandescent candelabra base sockets E12 C-A rated to 75 wt; 40 wt recommended. UL listed

WATTAGE

80 watts per tier recommended

REMARKS

Specify drop length / overall height. Two tiers minimum. Connects with canopy insert hanging bar directly to junction box. Indoor use and dry locations only. Armature is flat packed for shipment

CARE

Clean with a dry soft cloth, no harsh cleaning agents or chemicals


PRODUCTION LEAD TIME


10 to 12 weeks

ORIGIN

Made in New York

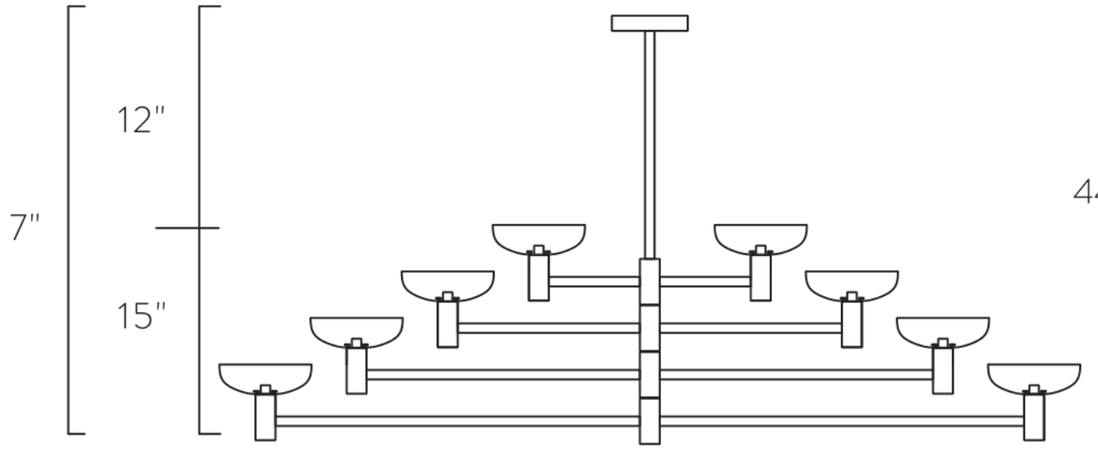


12"
7"
15"

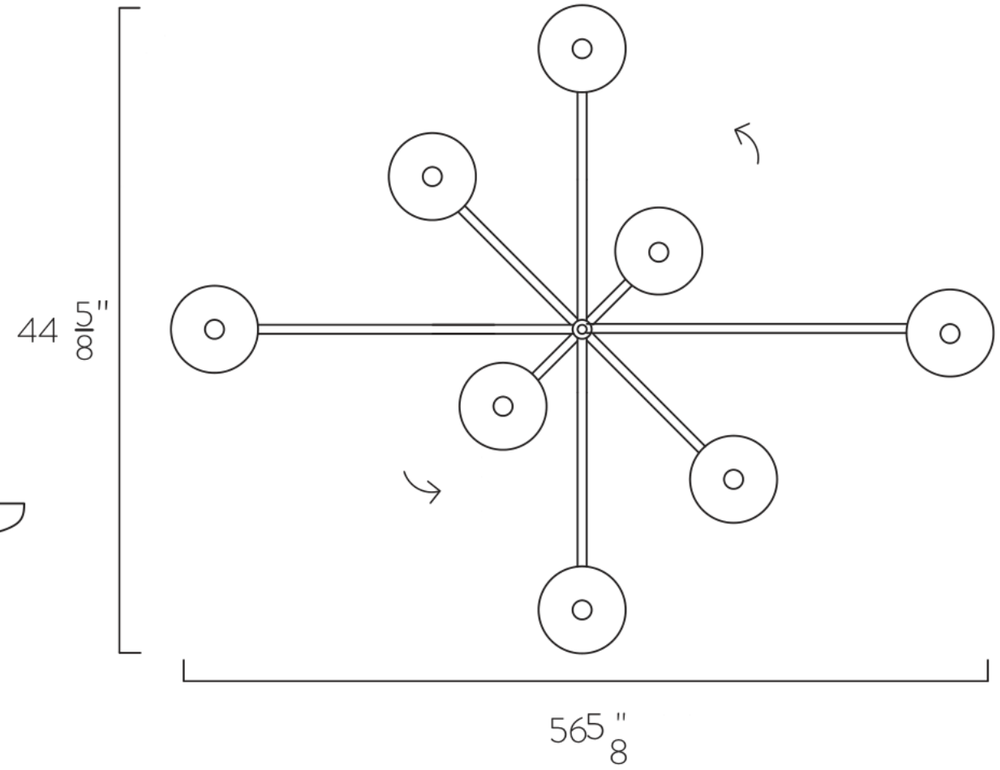
44 5/8"
56 5/8"