



CLEARLED : X-GLASS

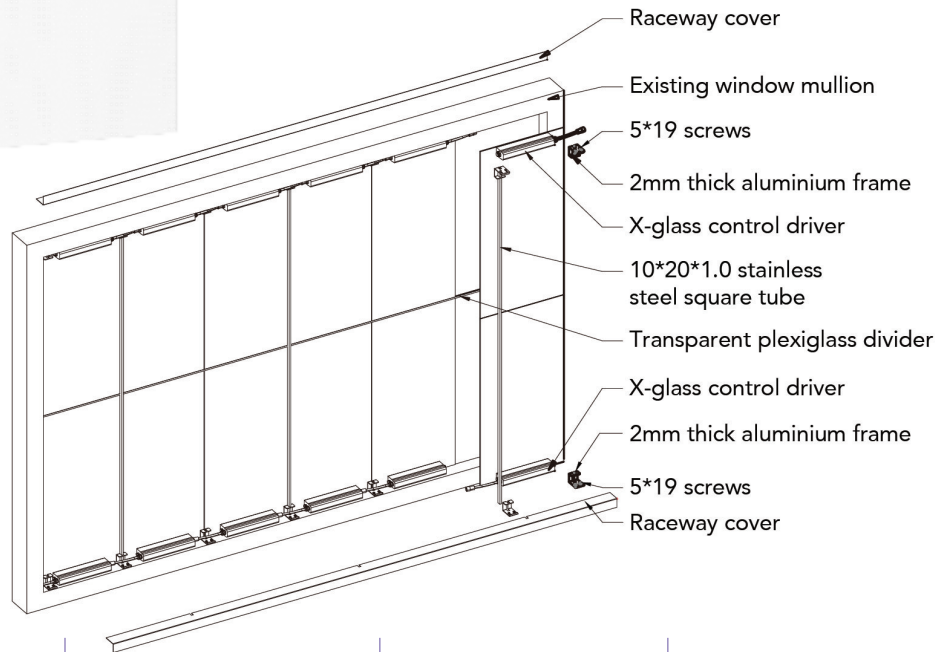

Model	X-GLASS 7.8	X-GLASS 10	X-GLASS 16	X-GLASS 20
Pixel Pitch (mm)	7.8	10.4	16	20
Module Size (mm) (W)x(H)	1,000 x 3,000/Custom			
Module Resolution (pixel)	128 x 64	96 x 48	62 x 31	50 x 12/60 x 12/75 x 12
Brightness (cd/m ²)	>8,000	>10,000 (high brightness) >5,500 (standard)	>4,500 (high brightness) >2,200 (standard)	1,500/4,000
Viewing Angle (H/V)	140°/140°			160°
Transparency	50% ~ 95%			
Grayscale (bits)	16			
Refresh Rate (Hz)	3840			
Frame Rate (Hz)	60			

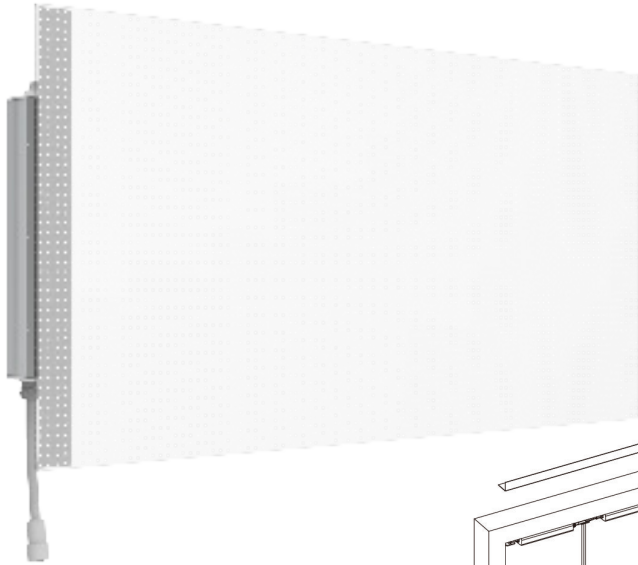

Avg. Power Consumption (W/m ²)	500 ~ 600	600 ~ 800 (high brightness) 200 ~ 400 (standard)	230 ~ 300 (high brightness) 100 ~ 150 (standard)	400
Max. Power Consumption (W/m ²)	950	1,300 (high brightness) 600 (standard)	500 (high brightness) 230 (standard)	800
Main Material	Polycarbonate, nano copper-coated material wire, TPU film			
Screen Body Weight (kg/m ²)	20 ~ 70			
Ingress Protection	IP65			
Working Temperature (°C)	-40 ~ 80			
Storage Temperature (°C)	-10 ~ 65			
Working Voltage	AC100 ~ 240V, 50/60Hz			
Lifespan (hours)	> 100,000			

