

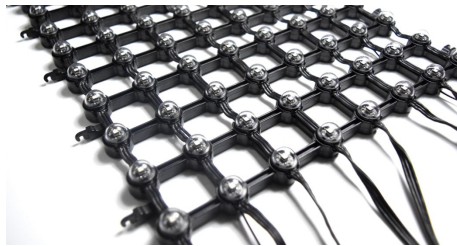


CLEARLED : NET 37

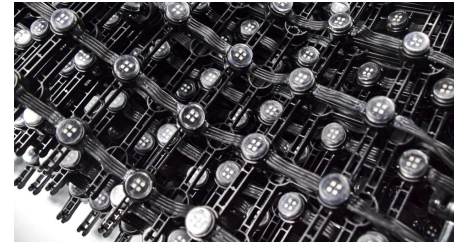



Model	NET 37-P1	NET 37-P3M	NET 37-P4M
Pixel Pitch	37.5mm		
Pixel Configuration	1xSMD3535	3xSMD2727	4xSMD2727
Panel Size	300x4800mm		
Panel Resolution	8x128 pixels		
Panel Weight	4.2kg/m ²	6.5kg/m ²	6.5kg/m ²
Brightness	1800nits	5300nits	7100nits
IP Rating	IP65		
Refresh Rate	4000Hz	3000~8000Hz	3000~8000Hz
Transparency Rate	63%	56%	56%
Scan Mode	Static		
Max. Power Consumption	360W/m ²	540W/m ²	710W/m ²
Color Processing	16bit		
Viewing Angle (H/V)	140°/110°		
Operating Temperature	-20°C~50°C		
Main Power Source	AC 100V~240V 50/60Hz		
Input Voltage	7.5V DC	12V DC	15V DC
Humidity	10%~90% RH		
Life Time	100,000 hours		
Certification	CE, RoHS		

CLEARLED : NET 40

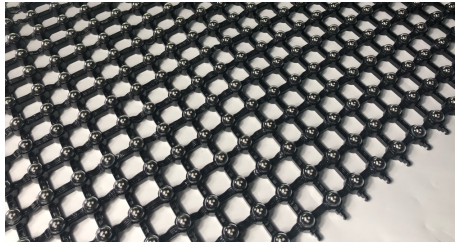



Model	NET 40-P1	NET 40-P3M	NET 40-P4M
Pixel Pitch	40mm		
Pixel Configuration	1xSMD3535	3xSMD2727	4xSMD2727
Panel Size	320x5120mm		
Panel Resolution	8x128 pixels		
Panel Weight	3.5kg/m ²	5.5kg/m ²	5.5kg/m ²
Brightness	1600nits	4700nits	6250nits
IP Rating	IP65		
Refresh Rate	4000Hz	3000~8000Hz	3000~8000Hz
Transparency Rate	66%	60%	60%
Scan Mode	Static		
Max. Power Consumption	320W/m ²	460W/m ²	625W/m ²
Color Processing	16bit		
Viewing Angle (H/V)	140°/110°		
Operating Temperature	-20°C~50°C		
Main Power Source	AC 100V~240V 50/60Hz		
Input Voltage	7.5V DC	12V DC	15V DC
Humidity	10%~90% RH		
Life Time	100,000 hours		
Certification	CE, RoHS		

CLEARLED : NET 56

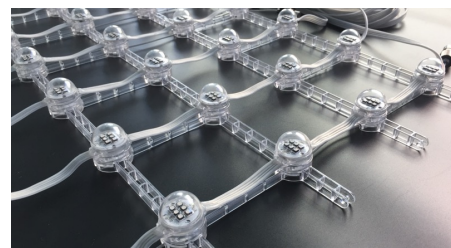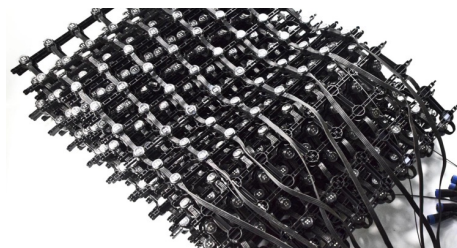



Model	NET 56-P1	NET 56-P3	NET 56-P3M	NET 56-P4	NET 56-P4M	NET 56-P6	NET 56-P8
Pixel Pitch	56.25mm						
Pixel Configuration	1xSMD3535	3xSMD3535	3xSMD2727	4xSMD3535	4xSMD2727	6xSMD3535	8xSMD2727
Panel Size	450x7200mm					450x5625mm	450x4500mm
Panel Resolution	8x128 pixels					8x100 pixels	8x80 pixels
Panel Weight	2.4kg/m ²	5.5kg/m ²	3.5kg/m ²	5.5kg/m ²	3.5kg/m ²	5.5kg/m ²	5.5kg/m ²
Brightness	800nits	2400nits	2400nits	3200nits	3200nits	4800nits	6400nits
IP Rating	IP65						
Refresh Rate	4000Hz	1000Hz	3000~8000Hz	1000Hz	3000~8000Hz	3000~8000Hz	3000~8000Hz
Transparency Rate	77%	65%	72%	65%	72%	65%	65%
Scan Mode	Static						
Max. Power Consumption	160W/m ²	240W/m ²	240W/m ²	320W/m ²	320W/m ²	480W/m ²	570W/m ²
Color Processing	16bit	12bit	16bit	12bit	16bit	16bit	16bit
Viewing Angle (H/V)	140°/110°						
Operating Temperature	-20°C~50°C						
Main Power Source	AC 100V~240V 50/60Hz					AC 110V~220V 50/60Hz	
Input Voltage	7.5V DC	12V DC	12V DC	15V DC	15V DC	24V DC	15V DC
Humidity	10%~90% RH						
Life Time	100,000 hours						
Certification	CE, RoHS						

CLEARLED : NET 75

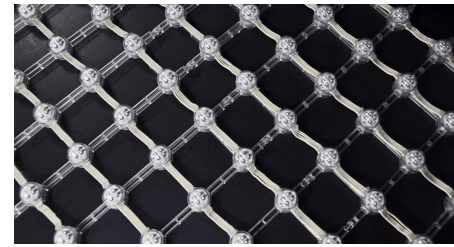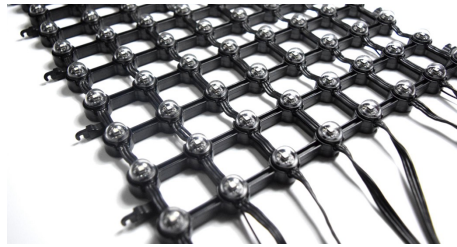

Model	NET 75-P1	NET 75-P3	NET 75-P3M	NET 75-P4	NET 75-P4M	NET 75-P6	NET 75-P8
Pixel Pitch	75mm						
Pixel Configuration	1xSMD3535	3xSMD3535	3xSMD2727	4xSMD3535	4xSMD2727	6xSMD3535	8xSMD2727
Panel Size	600x9600mm					600x7500mm	600x6000mm
Panel Resolution	8x128 pixels					8x100 pixels	8x80 pixels
Panel Weight	1.5kg/m ²	3.5kg/m ²	2.5kg/m ²	3.5kg/m ²	2.5kg/m ²	3.5kg/m ²	3.5kg/m ²
Brightness	450nits	1350nits	1350nits	1800nits	1800nits	2700nits	3600nits
IP Rating	IP65						
Refresh Rate	4000Hz	1000Hz	3000~8000Hz	1000Hz	3000~8000Hz	3000~8000Hz	3000~8000Hz
Transparency Rate	83%	73%	80%	73%	80%	73%	73%
Scan Mode	Static						
Max. Power Consumption	90W/m ²	135W/m ²	135W/m ²	180W/m ²	180W/m ²	270W/m ²	320W/m ²
Color Processing	16bit	12bit	16bit	12bit	16bit	16bit	16bit
Viewing Angle (H/V)	140°/110°						
Operating Temperature	-20°C~50°C						
Main Power Source	AC 100V~240V 50/60Hz					AC 110V~220V 50/60Hz	
Input Voltage	7.5V DC	12V DC	12V DC	15V DC	15V DC	24V DC	15V DC
Humidity	10%~90% RH						
Life Time	100,000 hours						
Certification	CE, RoHS						

CLEARLED : NET 80

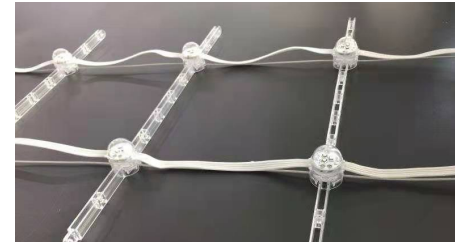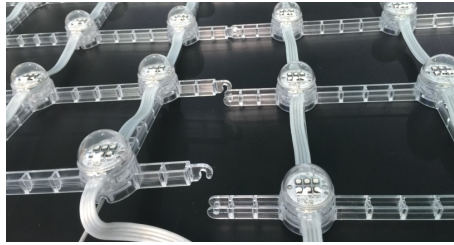



Model	NET 80-P1	NET 80-P3M	NET 80-P4M	NET 80-P6
Pixel Pitch	80mm			
Pixel Configuration	1xSMD3535	3xSMD2727	4xSMD2727	6xSMD3535
Panel Size	640x10240mm			640x8000mm
Panel Resolution	8x128 pixels			8x100 pixels
Panel Weight	1.25kg/m ²	2.0kg/m ²	2.2kg/m ²	3.2kg/m ²
Brightness	380nits	1200nits	1600nits	2200nits
IP Rating	IP65			
Refresh Rate	4000Hz	3000~8000Hz	3000~8000Hz	3000~8000Hz
Transparency Rate	85%	82%	82%	75%
Scan Mode	Static			
Max. Power Consumption	80W/m ²	120W/m ²	160W/m ²	240W/m ²
Color Processing	16bit	16bit	16bit	16bit
Viewing Angle (H/V)	140°/110°			
Operating Temperature	-20°C~50°C			
Main Power Source	AC 100V~240V 50/60Hz			AC 110V~220V 50/60Hz
Input Voltage	7.5V DC	12V DC	15V DC	24V DC
Humidity	10%~90% RH			
Life Time	100,000 hours			
Certification	CE, RoHS			

CLEARLED : NET 100





Model	NET 100-P3	NET 100-P4	NET 100-P6	NET 100-P8
Pixel Pitch	100mm			
Pixel Configuration	3xSMD3535	4xSMD3535	6xSMD3535	8xSMD2727
Panel Size	800x12800mm		800x10000mm	800x8000mm
Panel Resolution	8x128 pixels		8x100 pixels	8x80 pixels
Panel Weight	2.5kg/m ²	2.5kg/m ²	2.5kg/m ²	2.5kg/m ²
Brightness	750nits	1000nits	1500nits	2000nits
IP Rating	IP65			
Refresh Rate	1000Hz	1000Hz	3000~8000Hz	3000~8000Hz
Transparency Rate	80%	80%	80%	80%
Scan Mode	Static			
Max. Power Consumption	75W/m ²	100W/m ²	150W/m ²	180W/m ²
Color Processing	12bit	12bit	16bit	16bit
Viewing Angle (H/V)	140°/110°			
Operating Temperature	-20°C~50°C			
Main Power Source	AC 100V~240V 50/60Hz		AC 110V~220V 50/60Hz	
Input Voltage	12V DC	15V DC	24V DC	15V DC
Humidity	10%~90% RH			
Life Time	100,000 hours			
Certification	CE, RoHS			

CLEARLED : NET 150

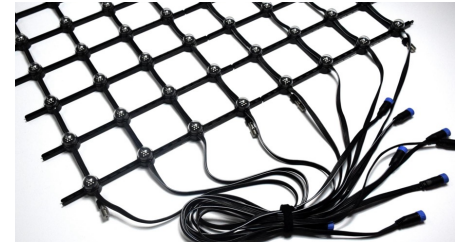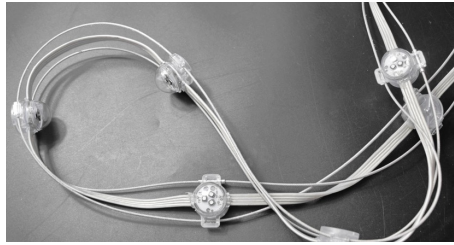

Model	NET 150-P3	NET 150-P4	NET 150-P6	NET 150-P8
Pixel Pitch	150mm			
Pixel Configuration	3xSMD3535	4xSMD3535	6xSMD3535	8xSMD2727
Panel Size	1200x19200mm		1200x15000mm	1200x12000mm
Panel Resolution	8x128 pixels		8x100 pixels	8x80 pixels
Panel Weight	1.5kg/m ²	1.5kg/m ²	1.5kg/m ²	1.5kg/m ²
Brightness	350nits	450nits	700nits	900nits
IP Rating	IP65			
Refresh Rate	1000Hz	1000Hz	3000~8000Hz	3000~8000Hz
Transparency Rate	87%	87%	87%	87%
Scan Mode	Static			
Max. Power Consumption	35W/m ²	45W/m ²	70W/m ²	80W/m ²
Color Processing	12bit	12bit	16bit	16bit
Viewing Angle (H/V)	140°/110°			
Operating Temperature	-20°C~50°C			
Main Power Source	AC 100V~240V 50/60Hz		AC 110V~220V 50/60Hz	
Input Voltage	12V DC	15V DC	24V DC	15V DC
Humidity	10%~90% RH			
Life Time	100,000 hours			
Certification	CE, RoHS			

CLEARLED : NET 200

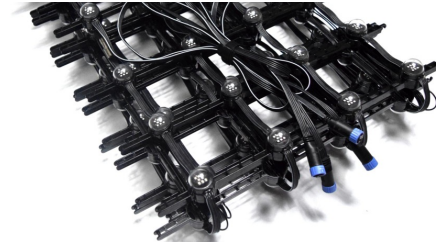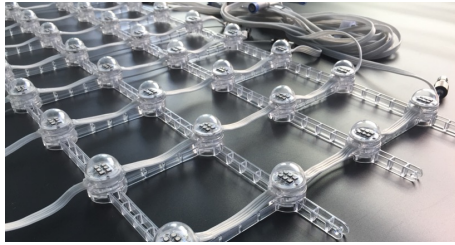

Model	NET 200-P3	NET 200-P4	NET 200-P6	NET 200-P8
Pixel Pitch	200mm			
Pixel Configuration	3xSMD3535	4xSMD3535	6xSMD3535	8xSMD2727
Panel Size	1600x25600mm		1600x20000mm	1600x16000mm
Panel Resolution	8x128 pixels		8x100 pixels	8x80 pixels
Panel Weight	0.75kg/m ²	0.75kg/m ²	0.75kg/m ²	0.75kg/m ²
Brightness	200nits	250nits	400nits	500nits
IP Rating	IP65			
Refresh Rate	1000Hz	1000Hz	3000~8000Hz	3000~8000Hz
Transparency Rate	92%	92%	92%	92%
Scan Mode	Static			
Max. Power Consumption	20W/m ²	25W/m ²	40W/m ²	45W/m ²
Color Processing	12bit	12bit	16bit	16bit
Viewing Angle (H/V)	140°/110°			
Operating Temperature	-20°C~50°C			
Main Power Source	AC 100V~240V 50/60Hz		AC 110V~220V 50/60Hz	
Input Voltage	12V DC	15V DC	24V DC	15V DC
Humidity	10%~90% RH			
Life Time	100,000 hours			
Certification	CE, RoHS			