


CLEARLED MICROMESH™ FIXED

ClearLED MicroMESH™ Fixed offers our most transparent, ultra-versatile display—customizable curves, trims, and rotations for seamless, stand-alone or glass-mounted installations in any shape or space.

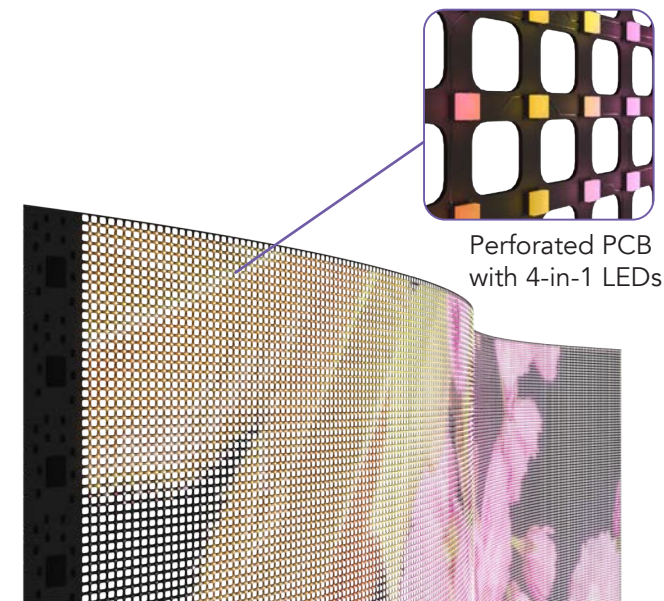

- 2,000mm**
Max. Length
- 4,500nits**
Max. Brightness
- 3,840Hz**
Refresh Rate
- Up to 93%**
Transparency
- 160°**
Viewing Angle
- 1.6kg/m²**
Ultra Light

MODULE	MMF3.9	MMF6	MMF8	MMF10	MMF16	MMF20	MMF24	MMF30
Pixel Pitch (mm)	3.9 x 3.9	6 x 6	8 x 8	10 x 10	16 x 16	20 x 20	24 x 24	30 x 30
LED Type	1415 4-in-1 LED			2121 4-in-1 LED				
Pixel Density (pixel/ m²)	65,536	27,556	15,625	10,000	3,844	2,500	1,681	1,089
Unit Module Size (mm)	250 x 1000, 1200, 1500, 2000* 500 x 1000, 1200, 1500, 2000*							
Brightness (nits)	4,500			4,000		3,000		2,000
Transparency (%)	≥50	≥64	≥73	≥79	≥87	≥90	≥91.5	≥93
Viewing Angle (H/V)	160°/160°							
Weight (kg/m²)	1.6							
Best Viewing Distance (m)	≥4	≥6	≥8	≥10	≥16	≥20	≥24	≥30
Gray Scale (bits)	16							
Frame Frequency (Hz)	60							
Refresh Rate (Hz)	3,840							
Power Consumption Max (W/m²)	650 / 230			650 / 230	590 / 200	400 / 130	270 / 90	
Working Temperature (°C)	-20 ~ 50							
IP Rating	IP21							
LED Lifetime (hours)	100,000							

INSTALLATION METHODS

