

HIGHLIGHTS

- 55 tons in 16' with 3 or 4 axles close coupled
50 tons in 12' with 3 or 4 axles close coupled
- **Low 9° front approach angle**
- 7-position hydraulic detachable gooseneck
- Tapered deck with 24' clear deck length
- **Low 16° deck-to-bogie transition ramps**
- Removable center bogie section with low boom well to haul excavators
- 7-position air ride tridem bogie, 255 tires and flip axle ready




Millers, Pavers, Rollers, Brooms

If you use it to build a road the Workhorse 55PVR hauls it!

WORKHORSE 55PVR

55 Tons • Hydraulic gooseneck • Tapered low entry deck • Fixed bogie

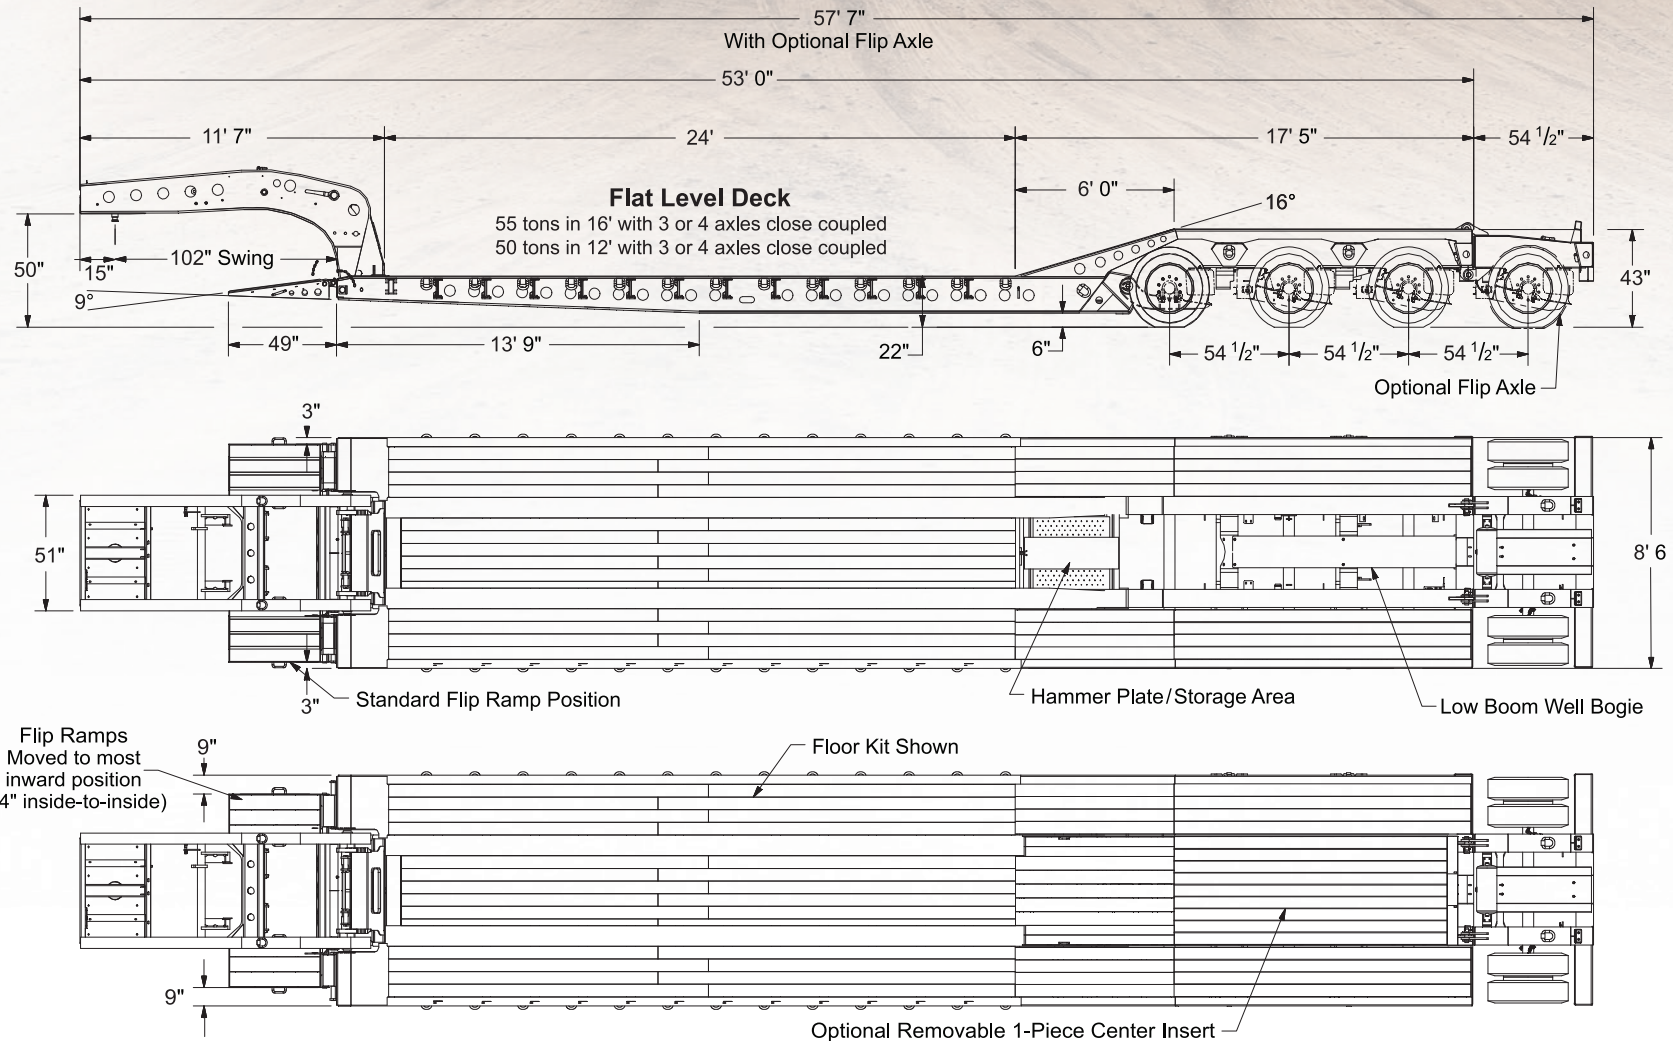

Specifications subject to change without notice. Images may show some optional equipment. GAWR and GVWR determine legal payloads.

Fontaine Specialized • 5398 US Highway 11 • Springville, AL 35146 • 205-467-6171 • www.fontainespecialized.com

A Marmon | Berkshire Hathaway Company

©2022 Fontaine Specialized • LT-123 R23



Workhorse 55PVR


Hydraulic gooseneck • Low entry deck • Fixed air tridem bogie



WORKHORSE 55PVR

Millers, Pavers, Rollers, Brooms

If you use it to build a road, the Workhorse 55PVR hauls it!

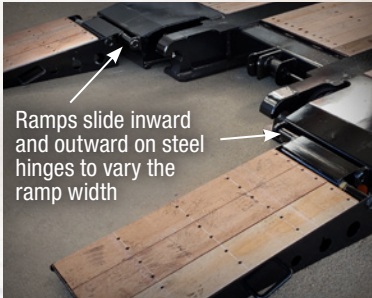


Ramps slide inward and outward on steel hinges to vary the ramp width

Front flip ramps feature 9° load angle with adjustable widths to 44" (inside to inside) to handle a wide range of equipment.



Remove the center bogie section to create a low boom well that is great for hauling excavators. The 4-point lift system makes it easy to convert.

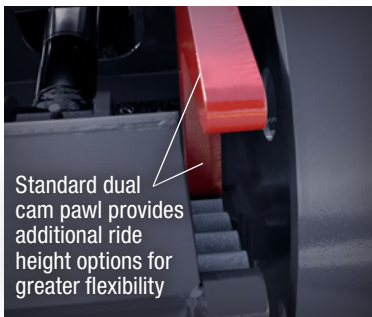

Standard dual cam pawl provides additional ride height options for greater flexibility

Standard Features and Specifications

Capacity

- 55 tons in 16' with 3 or 4 axles close coupled
- 50 tons in 12' with 3 or 4 axles close coupled (GAWR & GVWR determine legal payloads)

Foundation

- All main longitudinal members fabricated with 100,000# minimum yield steel flanges and 50,000# webs

Hydraulic Gooseneck

- Fastest, most versatile hydraulic detachable gooseneck in the industry—Plus you can connect or disconnect on uneven ground!
- Standard dual cam pawl with 7 ride height positions
- 50" loaded fifth wheel height
- 102" swing radius (11' 7" overall gooseneck length)
- Set up for wet line operation (pony motor optional)
- 560 7-pin electrical receptacle

Tapered Flat Level Deck

- 24' clear deck length—use every inch
- 8' 6" deck width
- 22" loaded deck height with 6" ground clearance
- 9° front double hinged flip ramps, adjustable to 44" (inside to inside) for easy equipment loading
- Crossmember spacing on 22" centers (nominal)
- Full width 1 1/2" nominal apitong flooring for greater durability
- Hammer Plate installed at rear of deck over recessed crossmembers with perforated plate below forming 1 storage area with 1 pair of D-Rings (Hammer Plate not accessible when bogie center insert is installed)
- Extension brackets installed for later installation of optional outriggers:
 - 12 pair (24 total) removable swing type
 - 1 pair (2 total) heavy-duty removable hook-on type

Fixed Bogie

- 3 axles with 54 1/2" spread
- 25,000 lbs capacity per axle (NOTE: GAWR determined by suspension type, brakes, tires and other components)
- Front bogie ramps sloped at 16° angle for easy loading
- Bogie platform includes load bearing wheel covers & apitong wood filled center insert for full width loading. Center bogie insert can be removed using easy 4-point lift system. With center insert removed, low boom well bogie has V-style boom trough with bolt-in V pan.
- Air ride suspension with automatic/manual raise/lower control, 7-position mechanical ride height and dump valve for total adjustment flexibility
- Air lift 3rd axle / chain lift 1st axle (acts as limit chain), limit chains on axle 2 & 3
- Brakes: 16.5" x 7" with 5.5" autoslacks, heavy duty brake drums, outboard mount, quick change replacement feature
- Wheels: 8.25 x 22.5 steel disc, hub-piloted (aluminum option)
- Tires: 255/70R 22.5 OEM standard
- Heavy duty V-style rear bumper
- 43" rear bogie height, 8' 6" width

Electrical

- DOT sealed beams and harness with LED lights on gooseneck, deck and bogie
- 4" flush mounted center flashing amber rear lights with battery back-up to operate disconnected from tractor

Securement

- 34 heavy-duty D-Rings (17 pair) located on deck and bogie
- 4 flag holders located at front of deck and rear bumper

Protective Coating

- Highest quality 2-part polyurethane enamel fights corrosion to extend service life (Primed for better paint adhesion)

Weight

- From 23,480 lbs. (22,390 lbs. without bogie center section)

Options

- Power Source: 13 HP (min.) Gasoline powered auxiliary power unit
- Aluminum center roller ramp (stores on gooseneck when not in use)
- High density auxiliary (stub) cross-member package—net spacing 11"
- Covered Rear Bogie: Load bearing wheel covers—Center insert deleted
- Wheels: 8.25 x 22.5 LVL One buffed/steel disc inside/hub-piloted
- Flip Axle: 51/60 rear flip axle with steel disc wheels or LVL One buffed outside/steel disc inside
- Paint options
- Liquid filled air gauge installed
- Load scale installed
- Dust shields on all axles
- Tire inflation system

Consult your local Fontaine Specialized dealer to configure a trailer matched to your special requirements!