


PACE 28 — CW

CEILING/WALL

A—N—D

Designed by Caine Heintzman

2025

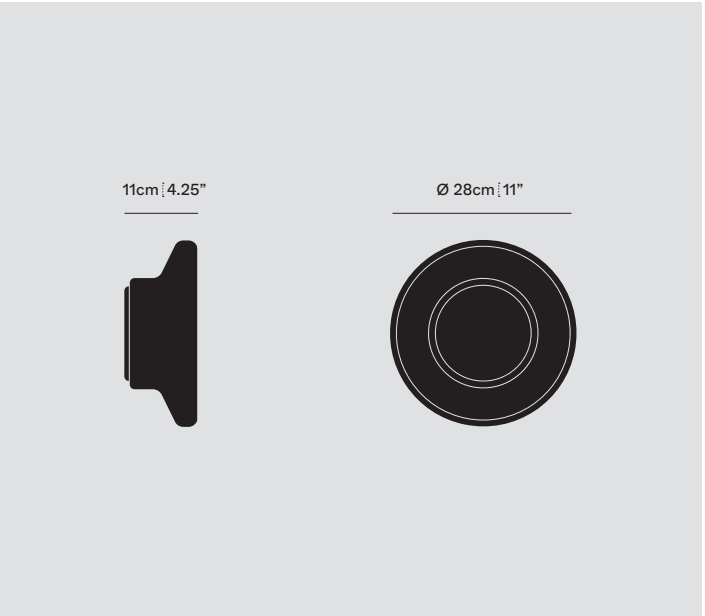

PAC-28-CW-FLT-DW-ELV-120

A-N-D.COM

TYPE

Ceiling/Wall

DIMENSIONS

Ø 28cm x 11cm / Ø 11" x 4.25"

MOUNTING OPTIONS

Driver remote and/or standard junction box

—See install instructions for more details

3D MODELS

REVIT, IES, DWG, 3DS, Rhino, Sketchup

MATERIALS

Glass, Aluminum

TECHNICAL INFORMATION

Input Voltage

110–120V, 220–240V, 110–277V

Lamping

24V DC LED

CRI 90+, 50,000 hours

Controls

Phase dimming, 0–10V, DALI

DIM TO WARM

Warm / DIM -

Bright / DIM +



COLOUR TEMPERATURE

Warm

Neutral



MANUFACTURED

Canada

FINISHES



Float (FLT)



Translucent
(TRN)



Umber (UMB)



For custom finishes, please inquire.

CERTIFICATIONS



Application: dry indoor location only

SERIES	SIZE	TYPE	FINISH	CCT	PS	VOLTAGE IN
PAC	28	CW	☐ FLT (FLOAT)	☐ 27 (2700K)	☐ ELV	☐ 120
			☐ TRN (TRANSLUCENT)	☐ DW (DIM TO WARM)	☐ 010	☐ 230
			☐ UMB (UMBER)		☐ DAL	☐ 277*

*277 only available with 010