


PIPELINE 125 — P

A—N—D

PENDANT

Designed by Caine Heintzman

2013

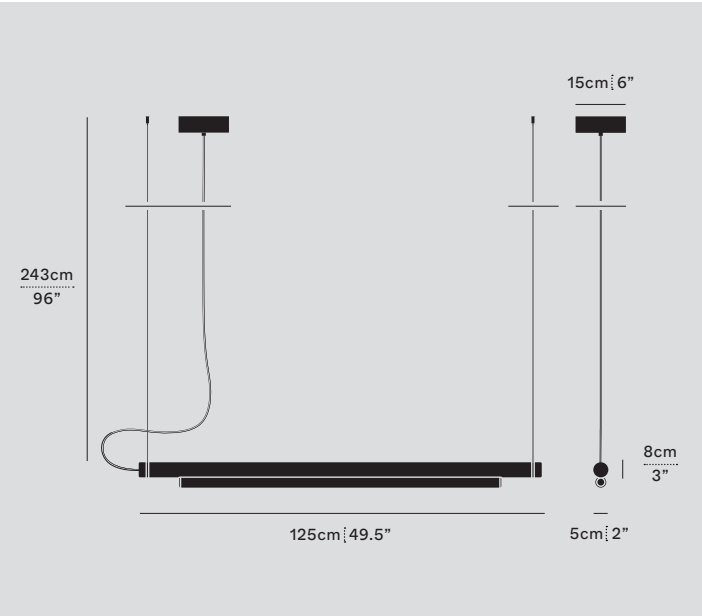

PIP-125-P-BK-27-ELV-120

A-N-D.COM

TYPE

Pendant

DIMENSIONS

125cm x 8cm x 5cm / 49.5" x 3" x 2"

Adjustable drop length

243cm / 96" —Custom length available

3D MODELS ON A-N-D.COM

REVIT, IES, DWG, 3DS, Rhino, Sketchup

CERTIFICATIONS



Application: dry indoor location only

TECHNICAL INFORMATION

Input Voltage

110–120V, 220–240V, 110–277V

Lamping

Integral 17W 24V DC LED

CRI 90+, 50,000 hours


Lumens

716 lumens delivered

Controls

Phase dimming, 0-10V, DALI

COLOUR TEMPERATURE OPTIONS



DIM TO WARM



MANUFACTURED

Canada

MATERIALS

Aluminum, Acrylic

FINISHES



Black (BK) White (WH) Raw (RA)



Brass (BR) Copper (CP) Chrome (CH)



For custom finishes, please inquire.

SERIES	SIZE	TYPE	BODY FINISH	END CAP/JOINER	CCT	PS	VOLTAGE IN
PIP	125	P	☐ BK (BLACK) ☐ WH (WHITE) ☐ RA (RAW) ☐ BR (BRASS) ☐ CP (COPPER) ☐ CH (CHROME)	☐ BK (BLACK) ☐ WH (WHITE) ☐ BR (BRASS) ☐ CP (COPPER) ☐ CH (CHROME)	☐ 27 (2700K) ☐ 30 (3000K) ☐ 35 (3500K) ☐ 41 (4100K) ☐ DW (DIM TO WARM)	☐ ELV ☐ 010 ☐ DAL	☐ 120 ☐ 230 ☐ 277*

*277 only available with 010


PIPELINE 125.3 — P

A—N—D

PENDANT

Designed by Caine Heintzman

2013

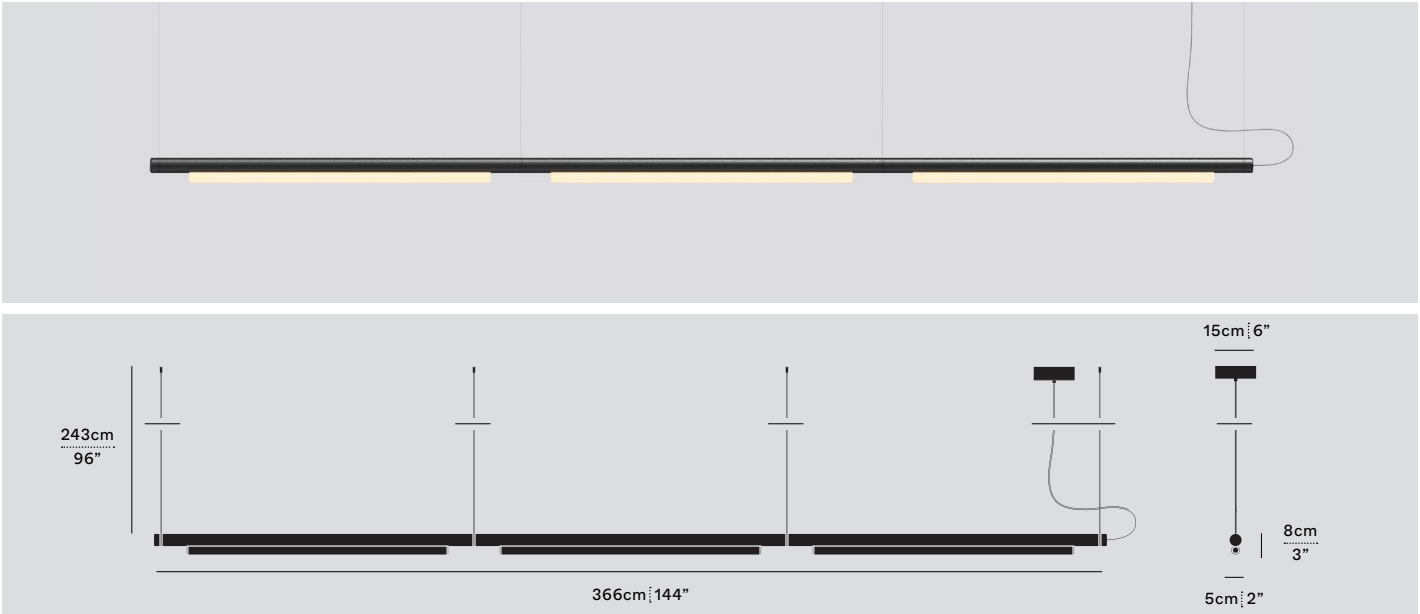

PIP-125.3-P-BK-27-ELV-120

A-N-D.COM

TYPE

Pendant

DIMENSIONS

366.2cm x 8cm x 5cm / 144.2" x 3" x 2"

Adjustable drop length

243cm / 96" —Custom length available

3D MODELS ON A-N-D.COM

REVIT, IES, DWG, 3DS, Rhino, Sketchup

CERTIFICATIONS



Application: dry indoor location only

TECHNICAL INFORMATION

Input Voltage

110–120V, 220–240V, 110–277V

Lamping

Integral 51W 24V DC LED

CRI 90+, 50,000 hours


Lumens

2148 lumens delivered

Controls

Phase dimming, 0-10V, DALI

COLOUR TEMPERATURE OPTIONS



DIM TO WARM



MANUFACTURED

Canada

MATERIALS

Aluminum, Acrylic

FINISHES



Black (BK) White (WH) Raw (RA)



Brass (BR) Copper (CP) Chrome (CH)



For custom finishes, please inquire.

SERIES	SIZE	TYPE	BODY FINISH	END CAP/JOINER	CCT	PS	VOLTAGE IN
PIP	125.3	P	☐ BK (BLACK) ☐ WH (WHITE) ☐ RA (RAW) ☐ BR (BRASS) ☐ CP (COPPER) ☐ CH (CHROME)	☐ BK (BLACK) ☐ WH (WHITE) ☐ BR (BRASS) ☐ CP (COPPER) ☐ CH (CHROME)	☐ 27 (2700K) ☐ 30 (3000K) ☐ 35 (3500K) ☐ 41 (4100K) ☐ DW (DIM TO WARM)	☐ ELV ☐ 010 ☐ DAL	☐ 120 ☐ 230 ☐ 277*

*277 only available with 010

PIPELINE 125.4 — P

A—N—D

PENDANT

Designed by Caine Heintzman

2013



PIP-125.4-P-BK-27-ELV-120

A-N-D.COM

TYPE

Pendant

DIMENSIONS

486.5cm x 8cm x 5cm / 191.5" x 3" x 2"

Adjustable drop length

243cm / 96" —Custom length available

3D MODELS ON A-N-D.COM

REVIT, IES, DWG, 3DS, Rhino, Sketchup

CERTIFICATIONS



Application: dry indoor location only

TECHNICAL INFORMATION

Input Voltage

110–120V, 220–240V, 110–277V

Lamping

Integral 68W 24V DC LED

CRI 90+, 50,000 hours


Lumens

2864 lumens delivered

Controls

Phase dimming, 0-10V, DALI

COLOUR TEMPERATURE OPTIONS



DIM TO WARM



MANUFACTURED

Canada

MATERIALS

Aluminum, Acrylic

FINISHES



Black (BK) White (WH) Raw (RA)



Brass (BR) Copper (CP) Chrome (CH)



For custom finishes, please inquire.

SERIES	SIZE	TYPE	BODY FINISH	END CAP/JOINER	CCT	PS	VOLTAGE IN
PIP	125.4	P	☐ BK (BLACK) ☐ WH (WHITE) ☐ RA (RAW) ☐ BR (BRASS) ☐ CP (COPPER) ☐ CH (CHROME)	☐ BK (BLACK) ☐ WH (WHITE) ☐ BR (BRASS) ☐ CP (COPPER) ☐ CH (CHROME)	☐ 27 (2700K) ☐ 30 (3000K) ☐ 35 (3500K) ☐ 41 (4100K) ☐ DW (DIM TO WARM)	☐ ELV ☐ 010 ☐ DAL	☐ 120 ☐ 230 ☐ 277*

*277 only available with 010


PIPELINE 125.2 — P

A—N—D

PENDANT

Designed by Caine Heintzman

2013

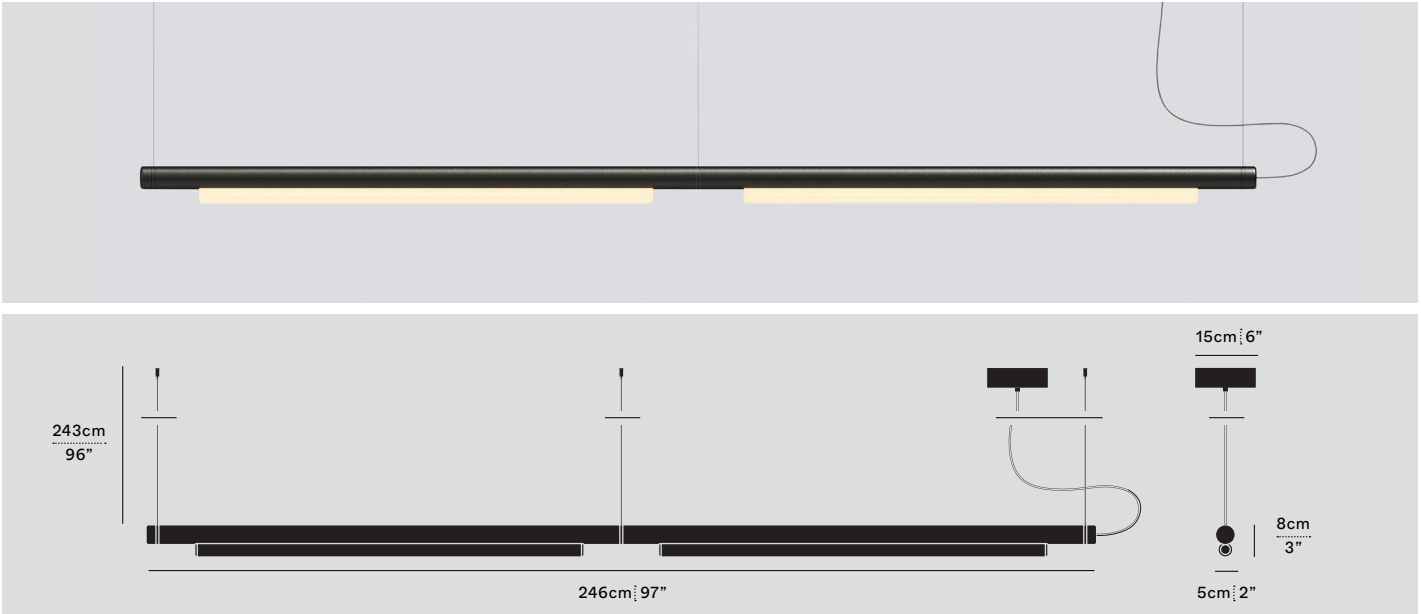

PIP-125.2-P-BK-27-ELV-120

A-N-D.COM

TYPE

Pendant

DIMENSIONS

246cm x 8cm x 5cm / 97"x 3" x 2"

Adjustable drop length

243cm / 96" —Custom length available

3D MODELS ON A-N-D.COM

REVIT, IES, DWG, 3DS, Rhino, Sketchup

CERTIFICATIONS



Application: dry indoor location only

TECHNICAL INFORMATION

Input Voltage

110–120V, 220–240V, 110–277V

Lamping

Integral 34W 24V DC LED

CRI 90+, 50,000 hours


Lumens

1432 lumens delivered

Controls

Phase dimming, 0-10V, DALI

COLOUR TEMPERATURE OPTIONS



DIM TO WARM



MANUFACTURED

Canada

MATERIALS

Aluminum, Acrylic

FINISHES



Black (BK) White (WH) Raw (RA)



Brass (BR) Copper (CP) Chrome (CH)



For custom finishes, please inquire.

SERIES	SIZE	TYPE	BODY FINISH	END CAP/JOINER	CCT	PS	VOLTAGE IN
PIP	125.2	P	☐ BK (BLACK) ☐ WH (WHITE) ☐ RA (RAW) ☐ BR (BRASS) ☐ CP (COPPER) ☐ CH (CHROME)	☐ BK (BLACK) ☐ WH (WHITE) ☐ BR (BRASS) ☐ CP (COPPER) ☐ CH (CHROME)	☐ 27 (2700K) ☐ 30 (3000K) ☐ 35 (3500K) ☐ 41 (4100K) ☐ DW (DIM TO WARM)	☐ ELV ☐ 010 ☐ DAL	☐ 120 ☐ 230 ☐ 277*

*277 only available with 010


PIPELINE 125.5 — P

A—N—D

PENDANT

Designed by Caine Heintzman

2013

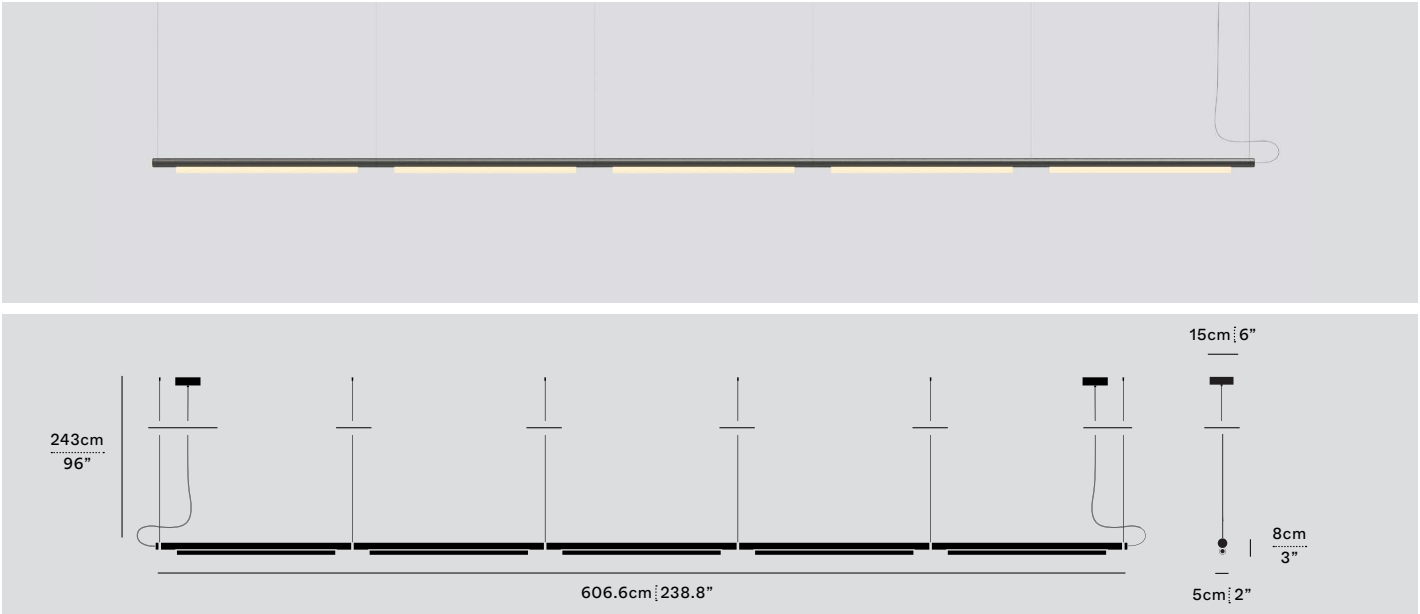

PIP-125.5-P-BK-27-ELV-120

A-N-D.COM

TYPE

Pendant

DIMENSIONS

606.6cm x 8cm x 5cm / 238.8" x 3" x 2"

Adjustable drop length

243cm / 96" —Custom length available

3D MODELS ON A-N-D.COM

REVIT, IES, DWG, 3DS, Rhino, Sketchup

CERTIFICATIONS



Application: dry indoor location only

TECHNICAL INFORMATION

Input Voltage

110–120V, 220–240V, 110–277V

Lamping

Integral 85W 24V DC LED

CRI 90+, 50,000 hours


Lumens

3580 lumens delivered

Controls

Phase dimming, 0-10V, DALI

COLOUR TEMPERATURE OPTIONS



DIM TO WARM



MANUFACTURED

Canada

MATERIALS

Aluminum, Acrylic

FINISHES



Black (BK) White (WH) Raw (RA)



Brass (BR) Copper (CP) Chrome (CH)



For custom finishes, please inquire.

SERIES	SIZE	TYPE	BODY FINISH	END CAP/JOINER	CCT	PS	VOLTAGE IN
PIP	125.5	P	☐ BK (BLACK)	☐ BK (BLACK)	☐ 27 (2700K)	☐ ELV	☐ 120
			☐ WH (WHITE)	☐ WH (WHITE)	☐ 30 (3000K)	☐ 010	☐ 230
			☐ RA (RAW)	☐ BR (BRASS)	☐ 35 (3500K)	☐ DAL	☐ 277*
			☐ BR (BRASS)	☐ CP (COPPER)	☐ 41 (4100K)		
			☐ CP (COPPER)	☐ CH (CHROME)	☐ DW (DIM TO WARM)		
			☐ CH (CHROME)				

*277 only available with 010