

**PERFORMANCE**

579 lumens AC  
629 lumens DC

**CERTIFICATION**

UL Listed  
UL Listed to Canadian safety standards.  
Suitable for Damp Locations  
IP65

**PATENT FILE NUMBER**

US: Filed Application

**SUSPENSION**

Stem Mount  
Stem lengths from 5" to 70", custom lengths available up to 140"  
Field trimmable

**LED LIFESPAN**

50k hours

# Triple Glazed

Pendants

**YOUR PRODUCT CODE**

TG-P-S-S18-PC80-14S-22-0.1\_10V\_UNV-CN00-IP65

**DESCRIPTION**

Triple Glazed is a compact pendant defined by a delicious and shapely form of blown glass. Even, upward-bending light develops in a playful, sculptural form.

**PRODUCT DIMENSIONS**

7"d x 4"h  
Stem lengths, 5" - 70"  
Additional stem lengths available, contact sales@rbw.com

**PRODUCT WEIGHT**

2.17lb

**SPECIFICATION LOGIC**

**GLASS FINISH**

Frosted Blush	S18
---------------	-----

**STEM FINISH**

Steam Grey	PC80
------------	------

**STEM LENGTH**

5" Stem	5S
14" Stem	14S
28" Stem	28S
42" Stem	42S
56" Stem	56S
70" Stem	70S

**COLOR TEMPERATURE**

2200K	22
2700K	27
3000K	30
3500K	35

**DIMMING / CONTROL / INPUT**

0.1% Dimming, 0-10V Control, 120V or 277V Universal Input (Driver External)	0.1_10V_UNV
1% Dimming, 0-10V Control, 120V or 277V Universal Input (Driver External)	1_10V_UNV
1% Dimming, TRIAC / Forward Phase Control, 120V Input (Driver External)	1_TRIAC_120V
Low Voltage (Driver required, driver not included)	LV
10% Dimming, TRIAC / Forward Phase Control, 120V Input (AC)	10_TRIAC_120V


**CANOPY**

Flat	CN00
Trimless	CN02

**IP RATING**

IP65	IP65
------	------

**DRAWINGS**

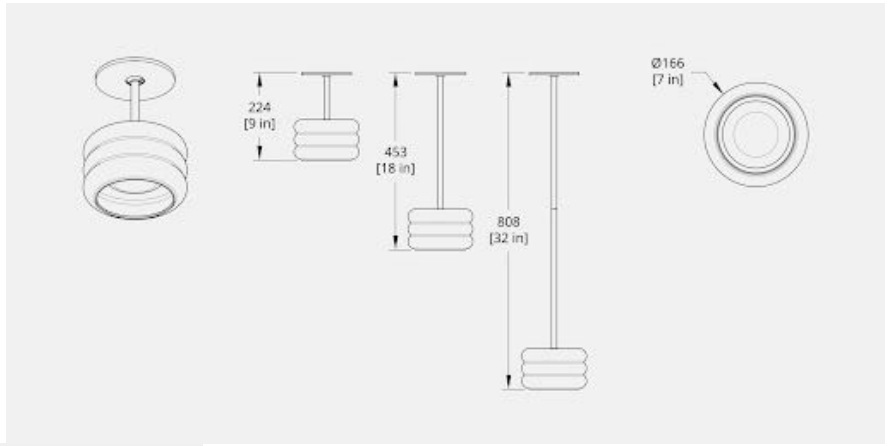

ase  
ept  
kies  
see  
his  
tent

