

PERFORMANCE

No Shade, Short Diffuser: 1231lm
 No Shade, Long Diffuser: 943lm
 Small Shade (Clear), Short Diffuser: 1065lm
 Small Shade (Clear), Long Diffuser: 923lm
 Power Consumption, DC 14.2W

CERTIFICATION

UL Listed
 UL Listed to Canadian safety standards.
 Suitable for Damp Locations
 IP20

PATENT FILE NUMBER

US: Filed Application

LED LIFESPAN

50k hours

SUSPENSION

Canopy configurations : White 7" Round Deep
 Canopy, White Trimless Canopy, White Flat
 Canopy
 Stem mount (matte white) or Cable suspension
 (white)
 Cable suspension: min hang height of 6", max of
 72"
 Stem height: 14" standard, contact
 sales@rbw.com for custom lengths
 Field trimmable

Ample

Pendants

YOUR PRODUCT CODE

AM-0-A-CS-S28-PC78-22-LV-IP20-
 CN00

DESCRIPTION

Ample is a high-output pendant with a visible heat sink, using layered silicone and glass. Available in a wide range of modular designs, Ample casts a soft, diffused light with configurable expression.

MATERIALS

Glass, Aluminum, Silicone

COLLECTION NOTES

Each form of glass is unique. As part of the production process, there may be small air bubbles within the glass.

PRODUCT DIMENSIONS

Small Diffuser, No Shade - 8"h x 5"d
 Large Diffuser, No Shade - 10"h x 5"d
 Small Diffuser, Small Shade - 8"h x 8"d
 Large Diffuser, Small Shade - 10"h x 8"d
 Small Diffuser, Large Shade - 10"h x 14"d
 Large Diffuser, Large Shade - 10"h x 14"d

PRODUCT WEIGHT

Small Diffuser, No Shade: 6lbs
 Large Diffuser, No Shade: 7lbs
 Small Diffuser, Small Shade: 9lbs
 Large Diffuser, Small Shade: 10lbs
 Small Diffuser, Large Shade: 11lbs
 Large Diffuser, Large Shade: 12lbs

SPECIFICATION LOGIC

SHADE

No Shade	0
Small Shade	8
Large Shade	14

DIFFUSER STYLE

Short Fluted	A
Long Fluted	B

MOUNTING

Stem Mount	ST
Cable Suspension	CS

GLASS FINISH

Frosted Smoked	S28
----------------	-----

HEAT SINK FINISH

Heritage Cream	PC78
----------------	------

COLOR TEMPERATURE

2200K	22
2700K	27
3000K	30
3500K	35
4000K	40

DIMMING / CONTROL / INPUT

0.1% Dimming, 0-10V Control, 120V or 277V Universal Input (Driver External)	0.1_10V_UNV
1% Dimming, 0-10V Control, 120V or 277V Universal Input (Driver External)	1_10V_UNV
1% Dimming, TRIAC / Forward Phase Control, 120V Input (Driver External)	1_TRIAC_120V
Low Voltage (Driver required, driver not included)	LV

IP RATING


IP 20	IP20
-------	------

CANOPY

Flat	CN00
Trimless	CD02
Deep Round	CD03

DRAWINGS

ample technical drawing

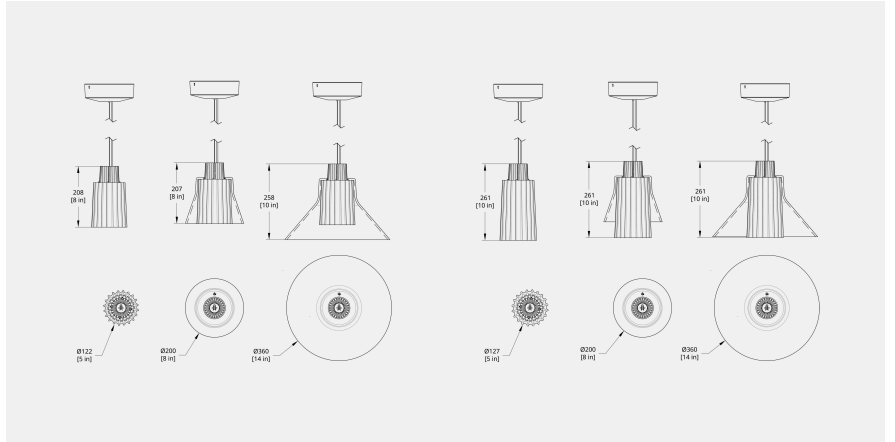

ample technical drawing, trimless canopy

ample technical drawing, flat canopy

ase
ept
kies
see
his
tent

