



CRX-A

LIGATURE RESISTANT CYLINDRICAL LOCK



The TownSteel Promise

We have built our company around the promise of creating durable hardware solutions for your projects. Our complete product line is the result of decades of determined engineering. This allows TownSteel to provide you with the right product to meet your exacting specifications. With end-to-end customer support, you will find that TownSteel is the ideal company for you to partner with. Check us out at townsteel.com for more information!

The CRX-A 5-point ligature resistant lock enhances patient and staff safety in high-risk environments. Its durable construction withstands high traffic and tampering without compromising performance.

CRX-A



<u>CONTENTS</u>	<u>PAGE</u>
Features	4
Specifications	5
Finishes	6
Lock Profile	7
Dimensions	8
Cylinders	9
Strikes	10
Functions	11
How to Order	13

Cover and Table of Contents features CRX-A in Satin Stainless Steel finish.

Features

CRX-A is recommended for high-risk areas in facilities housing patients at risk and is listed, approved, and accepted by the New York Office of Mental Health (NYOMH). This product is equipped with a 5-point ligature-resistant stainless steel arch trim and tamper-resistant mounting screws. Recommended for use in low, medium, and high-risk areas.




Features	Benefits
ANSI / BHMA A156.2	Grade 1 certified mechanical cylindrical lock
UL 10(C)	UL 10(C) listed 3 hour fire rating
ADA compliant	Meets requirements of the Americans with Disabilities Act
BAA compliant	Meets requirements of the Buy American Act
5-point ligature-resistant arch trim	Suitable for behavioral, mental, and psychiatric healthcare facilities

Specifications

Backsets	2-3/4", standard 2-3/8", optional 3-3/4", optional 5", optional
Lockbody	Rigid
Handings	LH / RH / LHR / RHR
Faceplate	1-1/8" x 2-1/4", square corner
Door Thickness	1-3/4"
Escutcheon	9-5/8" x 2-13/16", stainless steel
Arch Trim	2-5/8" projection, stainless steel
Strike	ASA Strike, 1-1/4" x 4-7/8", standard T-strike, 1-1/8" x 2-3/4", optional
Latch Bolt	1/2" throw, stainless steel
Door Prep	Standard 161, 2-1/8" cylinder hole, 1/2" bottom post hole
Mounting	Through-bolt, tamper resistant mounting screws, for wood and metal doors

Finishes




Satin Stainless Steel

(630)


Finishes are for illustration only and may vary from actual product provided

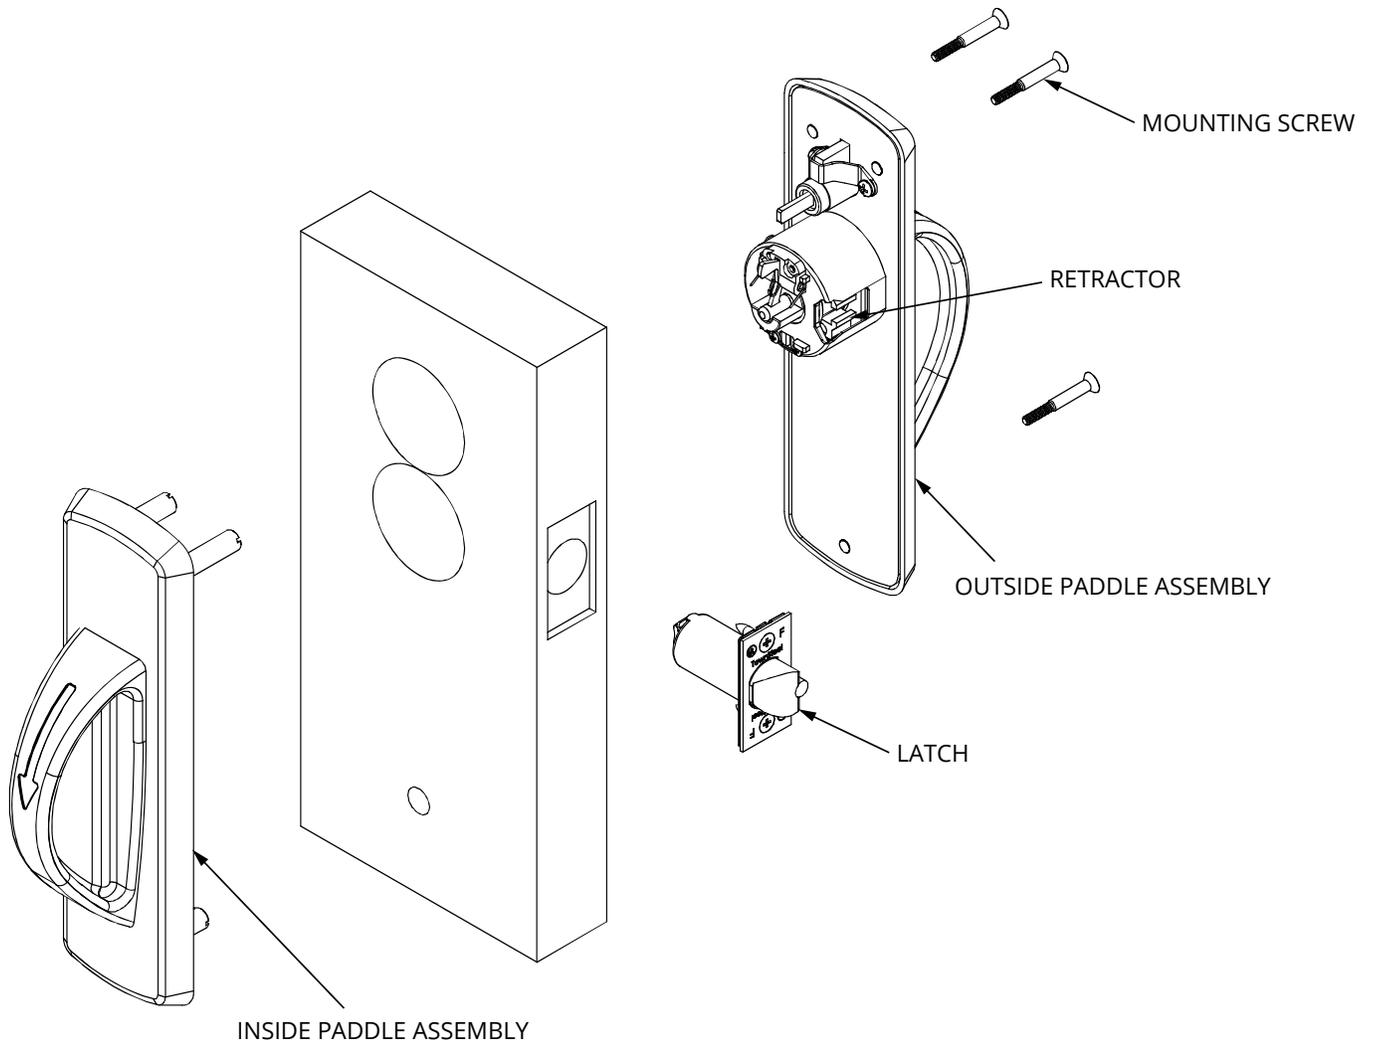Lock Profile



F84 (Classroom) function shown

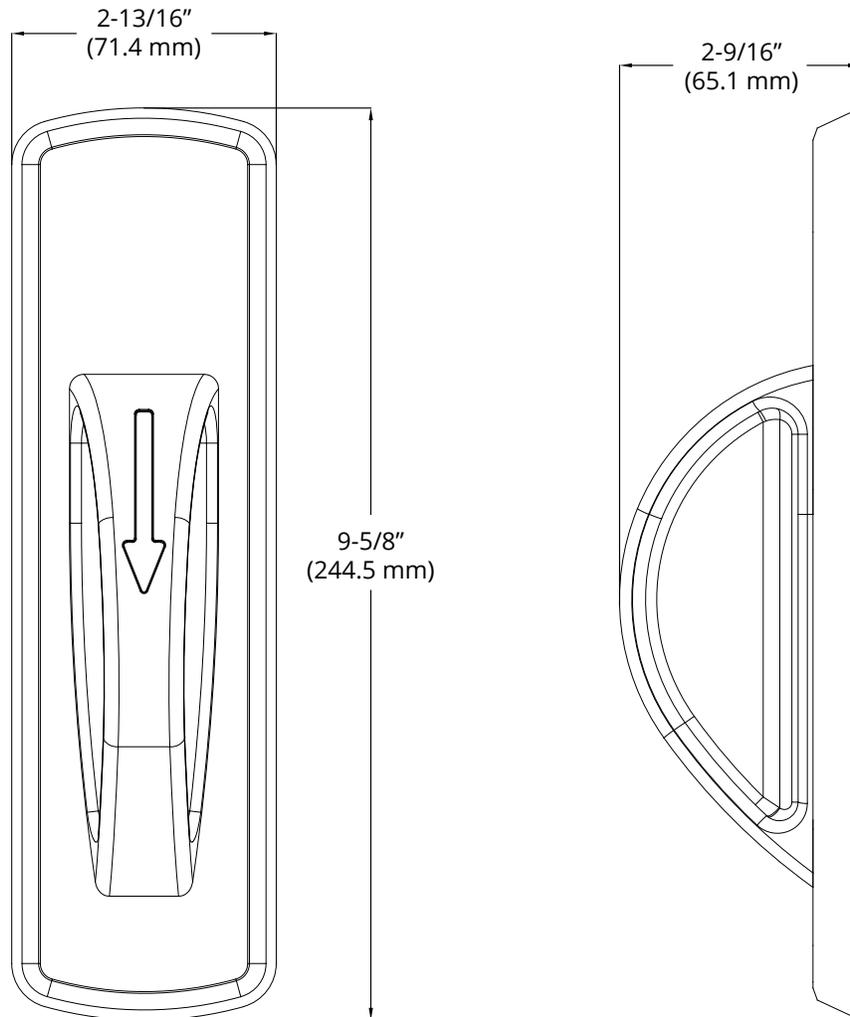Dimensions




CRX-A shown

Cylinders


SC	6-pin with Schlage® "C" keyway, standard
SFIC6	6-pin IC core with Best® "A" keyway
SFIC7	7-pin IC core with Best "A" keyway
CLFIC6	Corbin® large format IC, less core available for 6-pin core
SLFIC	Schlage large format IC, less core available
YLFIC	Accentra® (Formerly Yale) large format IC, less core available for 6-pin core
SALFIC	Sargent® large format IC, less core available for 6-pin core

Strikes





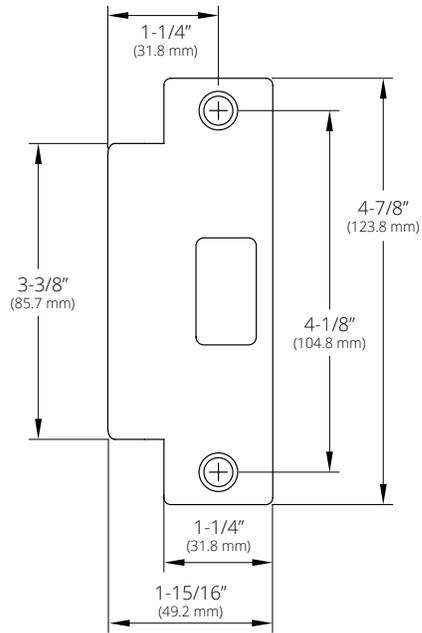
ASA Strike





T Strike

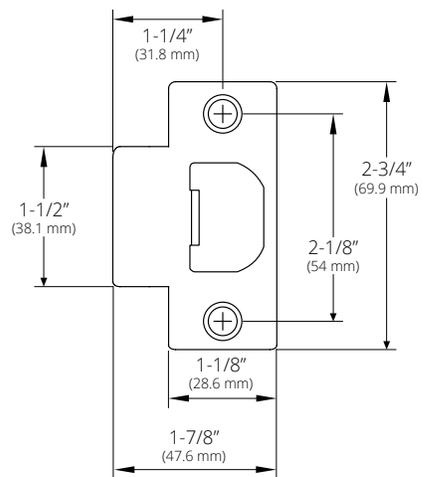

Functions

Out	In	Series / Function	Type	ANSI No.	Description
		CRXA-41	Single Dummy	—	Dummy trim on one side, blank plate on the other side.
		CRXA-72	Double Dummy	F72	Dummy trim on both sides.
		CRXA-75	Passage / Closet	F75	Latch bolt operated by lever or knob from either side at all times.
		CRXA-76	Privacy	F76	Latch bolt operated by lever or knob from either side. Outside lever or knob is locked by push button inside and unlocked by emergency release outside, operating inside lever or knob or closing door.
		CRXA-81	Entry / Office	F81	Turn / Push button locking. Pushing and turning button locks outside lever or knob requiring use of key until button is manually unlocked. Pushing button locks outside lever or knob until unlocked from outside by key or operating inside lever or knob. Dead locking latch bolt.

Functions

Out	In	Series / Function	Type	ANSI No.	Description
		CRXA-84	Classroom	F84	Deadlocking latch bolt operated by lever or knob from either side except when outside lever or knob is locked from outside by key. When outside lever or knob is locked, latch bolt is operated by key in outside lever or knob or operating inside lever or knob.
		CRXA-86	Storeroom	F86	Deadlocking latch bolt operated by key in outside lever or knob or operating inside lever or knob. Outside lever or knob is always non-active.

*The 87 (Asylum) lock function is available from TownSteel, contact for more information.

How to Order

CRX-A Ligature Resistant Cylindrical Lock

Trim

CRX-A	Cylindrical lock with ligature resistant arch trim
-------	--

Function

See Functions on page 11

Finish

630	Satin Stainless Steel
-----	-----------------------

Cylinder

See Cylinders on page 9

Handing

LH	Left Hand
RH	Right Hand
LHR	Left Hand Reverse
RHR	Right Hand Reverse

Pick one item from each category when ordering.

Example order: CRX-A-84-630-SC-LH



17901 Railroad Street
City of Industry, CA
91748

877-858-0888
info@townsteel.com

townsteel.com