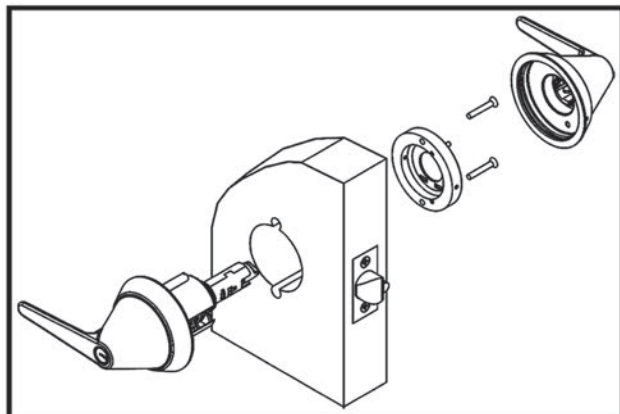


TRX-L ANSI Grade 1 Cylindrical Lock with Ligature Resistant Trim-Lever



Specifications

- For facilities housing patients at risk
- For door thickness 1-3/4"-2"
- 2-3/4" backset standard, 5" optional
- Non-handed
- Refer to function sheet for available functions
- 630 (US32D) finish
- Stainless steel rose, 3-5/8" in diameter
- Stainless steel lever, ligature resistant
- Stainless steel faceplate, 1-1/8" x 2-1/4"
- Stainless steel strike, ASA, 1-1/4" x 4-7/8"
- Through-bolt mounting, tamper resistant mounting screws, for wood and metal door
- Brass cylinder with stainless steel cover, 6 pin, Schlage "C" keyway standard, 2 keys per cylinder
- Small Format IC available with or without core, 6 or 7 pin core
- Schlage® Large Format I.C. less core available
- Corbin® Large Format I.C. less core available
- High Security Cylinder available, TownSteel "L" keyway, 6 pin
- High Security Small Format IC Core available, TownSteel "L" keyway, 7 pin
- 10-year limited warranty

Code Compliance

- ANSI/BHMA: A156.2 Grade 1 Certified
- UL/ULC: UL 10C Listed 3 Hour Fire Rating
- BAA: Meets requirements of the Buy American Act
- ADA: Meets requirements of the Americans with Disabilities Act



Important Note

It is TownSteel's position that if any of our keyed locks are to be used less cylinder, whether I.C. or standard, and another manufacturer's cylinder is to be used in place of the TownSteel original manufacturer's cylinder, that a sample of that product be provided to TownSteel in advance for testing.












How to Order:

| | |
|----------|---|
| Trim | TRX-L Ligature Resistant Lever Grade 1 Cylindrical Lock |
| Function | Please refer to function sheet |
| Cylinder | SC / SFIC6 / SFIC7 / CLFIC6 / SLFIC / L6 / L7 |

Example Order: TRX-L-86-SC

Functions Ligature Resistant Cylindrical Series

*Levers rotate up and down freely in the locked or unlocked positions

| Outside | Inside | Series | Type | ANSI No. | Function Description |
|---|--------|-------------------------------|--------------------|----------|---|
|  | | CRXA-41 | Single Dummy | | Dummy trim on one side, blank plate on the other side. |
|  | | CRXA-72 CRXK-72 TRXL-72 | Double Dummy | F72 | Dummy trim on both sides. |
|  | | CRXA-75 CRXK-75 TRXL-75 | Passage / Closet | F75 | Latch bolt operated by lever or knob from either side at all times. |
|  | | CRXA-76 CRXK-76 TRXL-76 | Privacy | F76 | Latch bolt operated by lever or knob from either side. Outside lever or knob is locked by push button inside and unlocked by emergency release outside, operating inside lever or knob or closing door. |
|  | | TRXL-80 | Communicating | F80 | Deadlocking latchbolt operated by lever from either side. Turning key in either lever or locks or unlocks its own lever independently. Do not use on doors in rooms that have no other entrance. |
|  | | CRXA-81 CRXK-81 | Entry / Office | F81 | Turn/Push button locking. Pushing and turning button locks outside lever or knob requiring use of key until button is manually unlocked. Pushing button locks outside lever or knob until unlocked from outside by key or operating inside lever or knob. Deadlocking latch bolt. |
|  | | CRXA-84 CRXK-84 TRXL-84 | Classroom | F84 | Deadlocking latch bolt operated by lever or knob from either side except when outside lever or knob is locked from outside by key. When outside lever or knob is locked, latch bolt is operated by key in outside lever or knob or operating inside lever or knob |
|  | | CRXA-86 CRXK-86 TRXL-86 | Storeroom | F86 | Deadlocking latch bolt operated by key in outside lever or knob or operating inside lever or knob. Outside lever or knob is always non-active. |
|  | | CRXK-87 TRXL-87 | Asylum | F87 | Deadlocking latch bolt operated by key in lever or knob from either side. Both levers or knobs are always non-active. |
|  | | TRXL-109 | Entry / Office | F109 | Dead locking latch bolt operated by lever from either side except when outside lever is locked by the push or turn button on inside. Key outside or operating inside lever releases push or turn button unlocking outside lever except when push or turn button has been rotated to keep outside lever locked. Inside push or turn button must be manually operated to unlock outside lever. Inside lever always operates latch bolt. |
|  | | CRXK-110 TRXL-110 | Classroom Intruder | F110 | Deadlocking latch bolt operated by knob from either side except when outside knob is locked from the inside or outside by key. When outside knob is locked, latch bolt is operated by inside knob or unlocked by key in outside or inside knob. |