

SPECIFICATION

5" 2 Way Outdoor Speaker

- . Outdoor-Rated IP55
- . Recommended Power: 10-100 watts
- . Frequency Response: 72 - 20KHz
- . Efficiency: 89dB at 1 watt/1 meter
- . Impedance: 8 ohm
- . Power Handling: 80 Watts
- . 5" Polypropylene Injection Cone
- . Rubber Surround
- . 13mm PEI Dome Tweeter



Outdoor Wall-Mounted Speaker

Specs & Installation Guide


INSTALLATION



- ① Using the included 4 screws, install the wall mount metal plate on to the wall. (Use the long side of the screwdriver.)




- ④ Use the M3 screw to secure the wall mount metal plate to the bracket. (Use the long side of the screwdriver.)

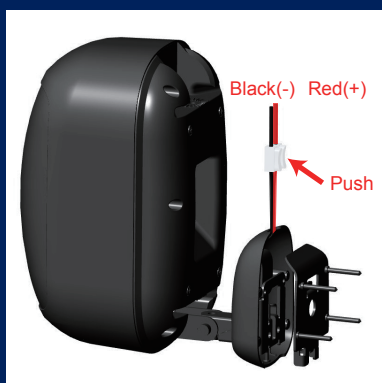

- ② Connect the positive (red wire) and negative (black wire) from the amplifier into the white terminal by pushing the tab on the white terminal, inserting the wire and releasing the tab. You can lightly tug on the wire to make sure it is secure.



- ⑤ Move the mounting cover on the back of the speaker towards the bracket mounted on the wall until it snaps into place.

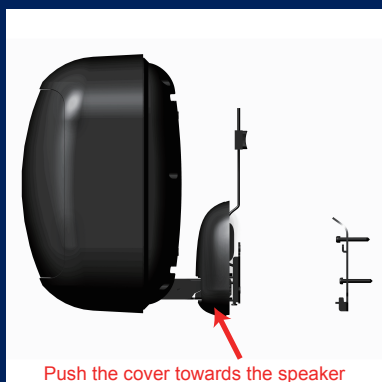

- ③ Pull back the bracket cover in order to mount the speaker from top to bottom onto the wall mount.



- ⑥ The speaker cabinet can be adjusted for positioning. Use the hex screw behind the bracket cover to adjust the speaker from side to side. Loosen the hex screw, adjust the speaker left or right as desired, then tighten the screw. Use the hex screw on the side of the bracket to adjust the speaker up or down. Loosen the hex screw, adjust the speaker up/down as desired, then tighten the screw. (Use the short side of the screwdriver.)