



ELM SURFACES

Bristle

Bristle

Bristle offers a bold and dramatic wood-inspired look, its deep tones providing a strong and sophisticated foundation for a variety of decor styles.



Honey 7"x48"

SPC Rigid Core Click Floating - 12mil - Wood Embossed



Finish



IXPE
Pad
Attache
d


7"x48"



Cotton 7"x48"



Canela 7"x48"

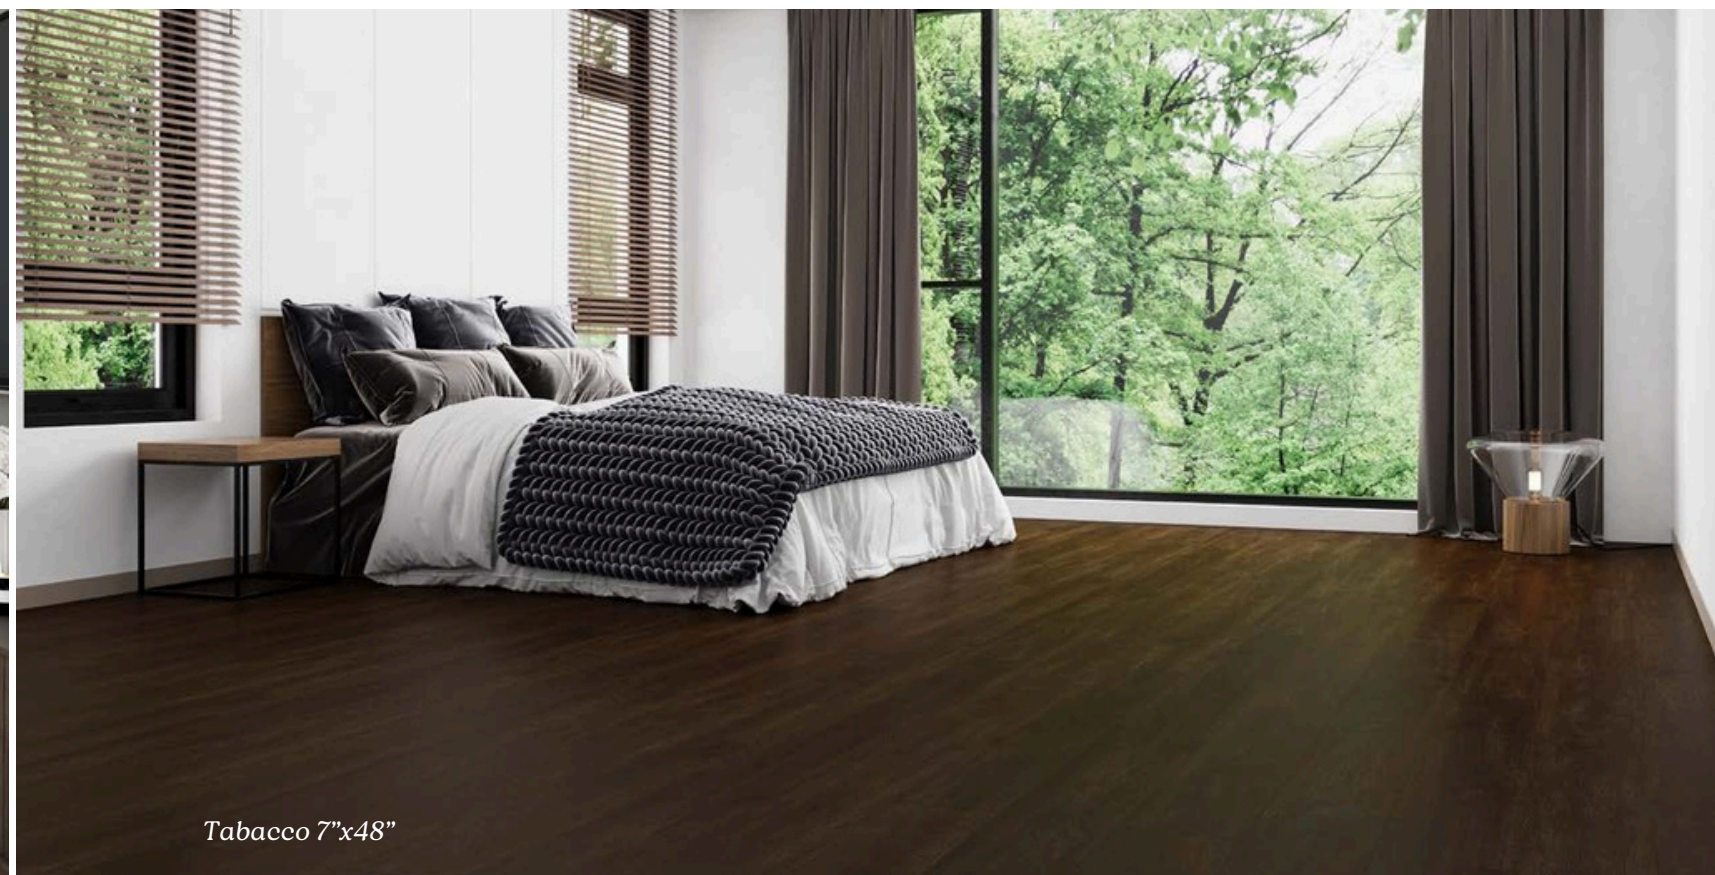

Tabacco 7"x48"

Bristle

SPC Rigid Core Click Floating

4.5mm

Unilin

Finish

NANO SILVER

IXPE Pad Attached

COATING

7"x48"

18x122 cm

12 mil - Wood Embossed



Cotton

7"x48"
EVFUMEIL4



Silk

7"x48"
EVFUMEL03



Honey

7"x48"
EVFUMEL04

***Coordinating Trims Available
T-mold, reducer, stairnosing.**



Maple 7"x48"



Maple

7"x48"
EVFUMEL07



Canela

7"x48"
EVFUME3L5



Tabacco

7"x48"
EVFUME623

Bristle

SPC Rigid Core Click Floating

Technical Specifications

	Standard	Result
Thickness		4.5mm
Size		7"x48"
Material		SPC
Wear Layer		12 mil
Surface Treatment		Nano Silver Coating
Surface Texture		Wood Emboss
Padding		Imm IXPE
Warranty	Commercial / Residential	10 year Commercial / Limited Lifetime Residential
Installation		Unilin Click
Beveled Edge		No
		Pass <450
Smoke Density	ASTM E662-06	Pass
Slip resistance	ASTM C1028	Pass
Staining resistance	ASTM F925	Pass
Light Resistance	ASTM F1515	Pass
Abrasion resistance	ASTM D4060	Pass
Dimensional stability	ASTM F2199	IIC = 62 dB concrete slab 6" drop ceiling
Acoustic impact noise reduction IIC	ASTM E492-09	STC = 68 db
Calculated Sound Tranmission STC	ASTM E413-16	Pass
Static load	ASTM F970-17	Pass
Indentation	ASTM F1914	Yes
Phthalate free		



Packaging Information

Size	SF percarton	PC percarton	BX perpallet
7"x48"	28.68	12	60