



SOLUNA Embark on a journey of authenticity with “Soluna”, designed to capture the essence of handcrafted art. Inspired by the tradition of artisanal craftsmanship, this piece tells a story of inspiration and design, reflecting the complexity and beauty that arise from the creative process. Its presence in your home not only adds a touch of sophistication but also invites you to appreciate the beauty of the unusual and the richness of the authentic.

Embárcate en un viaje de autenticidad con “Soluna”, diseñada para capturar la esencia del arte hecho a mano. Inspirada en la tradición de lo artesanal, esta pieza narra una historia de inspiración y diseño, reflejando la complejidad y belleza que surgen del proceso creativo. Su presencia en tu hogar no solo añade un toque de sofisticación, si no que también invita a apreciar la belleza de lo inusual y la riqueza de lo auténtico.



COLLECTION SUMMARY <i>RESUMEN DE LA COLECCIÓN</i>	<i>pag. 5</i>
APPLICATIONS <i>USOS</i>	<i>pag. 5</i>
GET INSPIRED <i>INSPIRATE</i>	<i>pag. 6</i>
LAYOUTS <i>COLOCACIONES</i>	<i>pag. 30</i>
TECHNICAL DRAWINGS <i>DIBUJOS TÉCNICOS</i>	<i>pag. 32</i>
TECHNICAL FEATURES <i>CARACTERÍSTICAS TÉCNICAS</i>	<i>pag. 33</i>
PRICE CODE <i>CÓDIGO DE TARIFA</i>	<i>pag. 34</i>
PACKING	<i>pag. 34</i>
RECOMENDATIONS <i>RECOMENDACIONES</i>	<i>pag. 35</i>



Collection summary - Resumen de la colección

SOLUNA 5,2x16 cm / 2”x6.3”

W \$ D25



White



Grey




Nude



Aqua



Pink



Mint



Wine



Cobalt



Emerald



Graphite

SOLUNA ROUNDED EDGE 1,1x16 cm / 0.43”x6.3”

W \$ DS2



* Available in all Soluna colours *
Disponible en todos los colores Soluna

Applications - Usos

Indoor / Interior	Outdoor / Exterior	Floor / Pavimento	Wall / Pared	Pool / Piscina	Non-slip / Antislip



Soluna Pink



Soluna Aqua & Soluna **Rounded Edge** Aqua



Soluna Cobalt




Soluna White



Soluna Grey



Soluna Nude

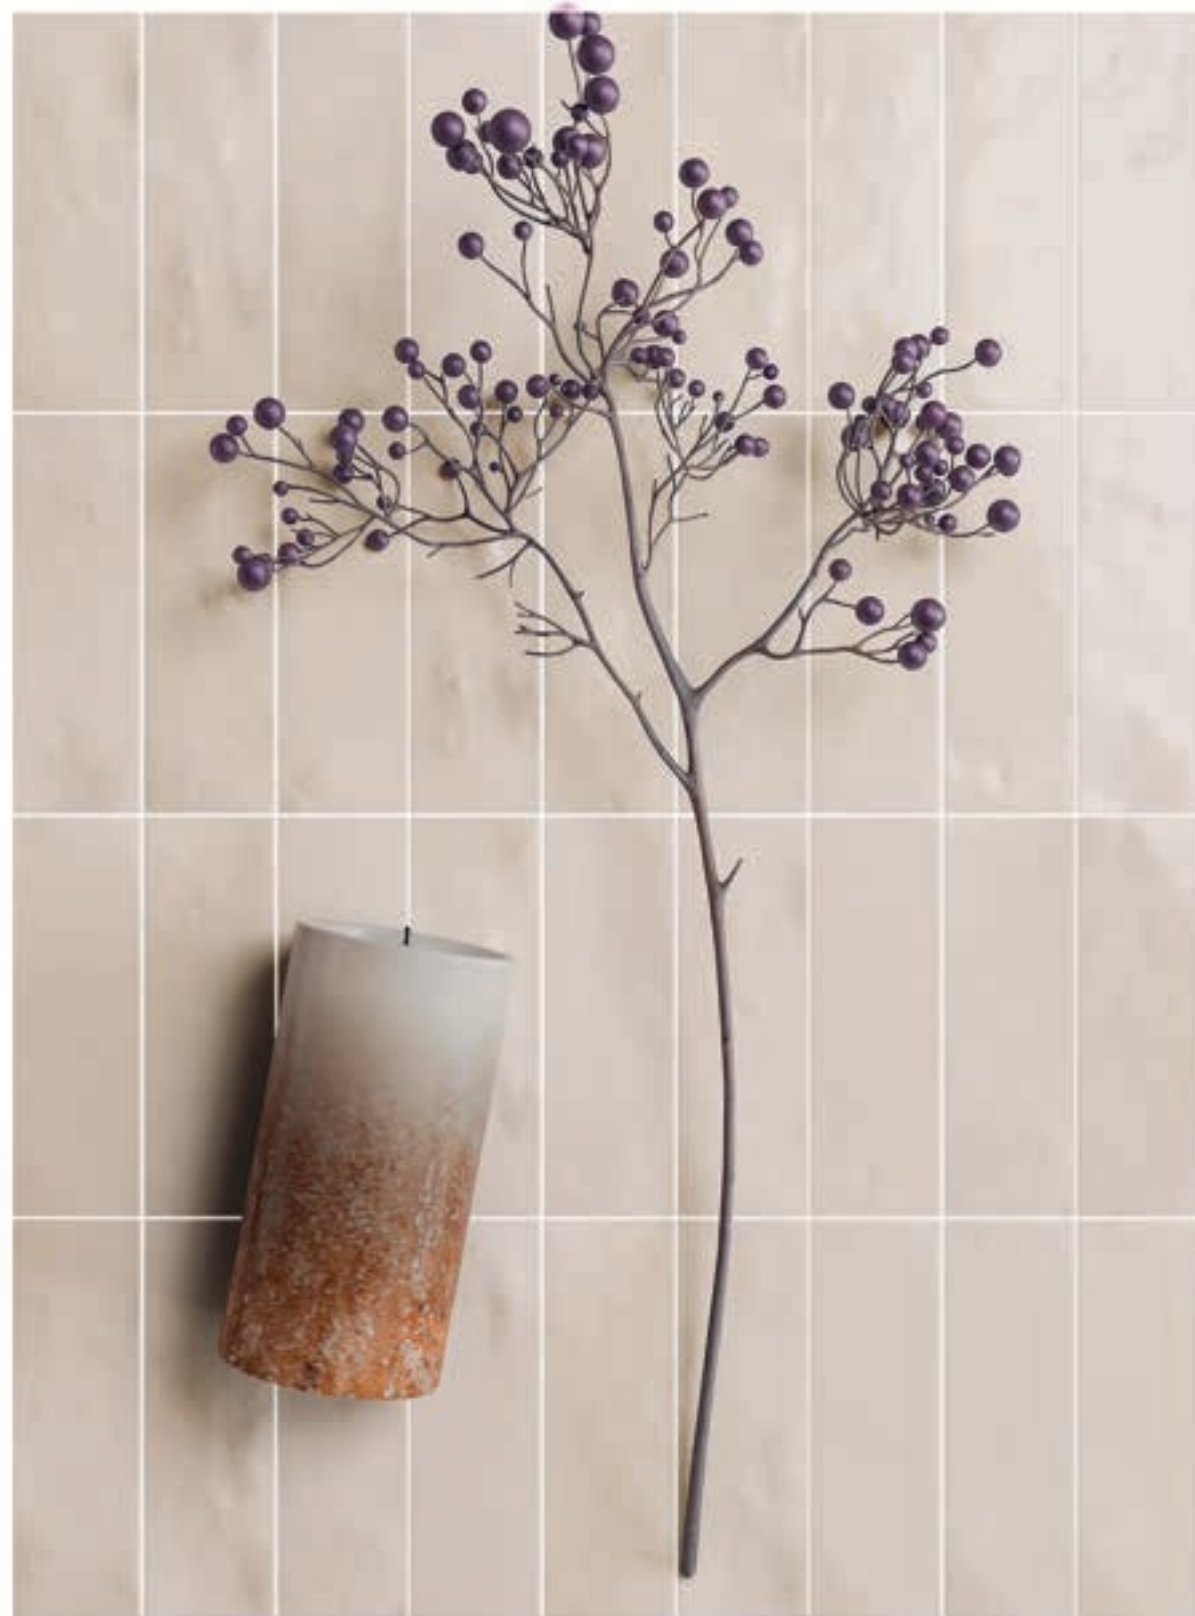





Soluna Mint






Soluna Nude

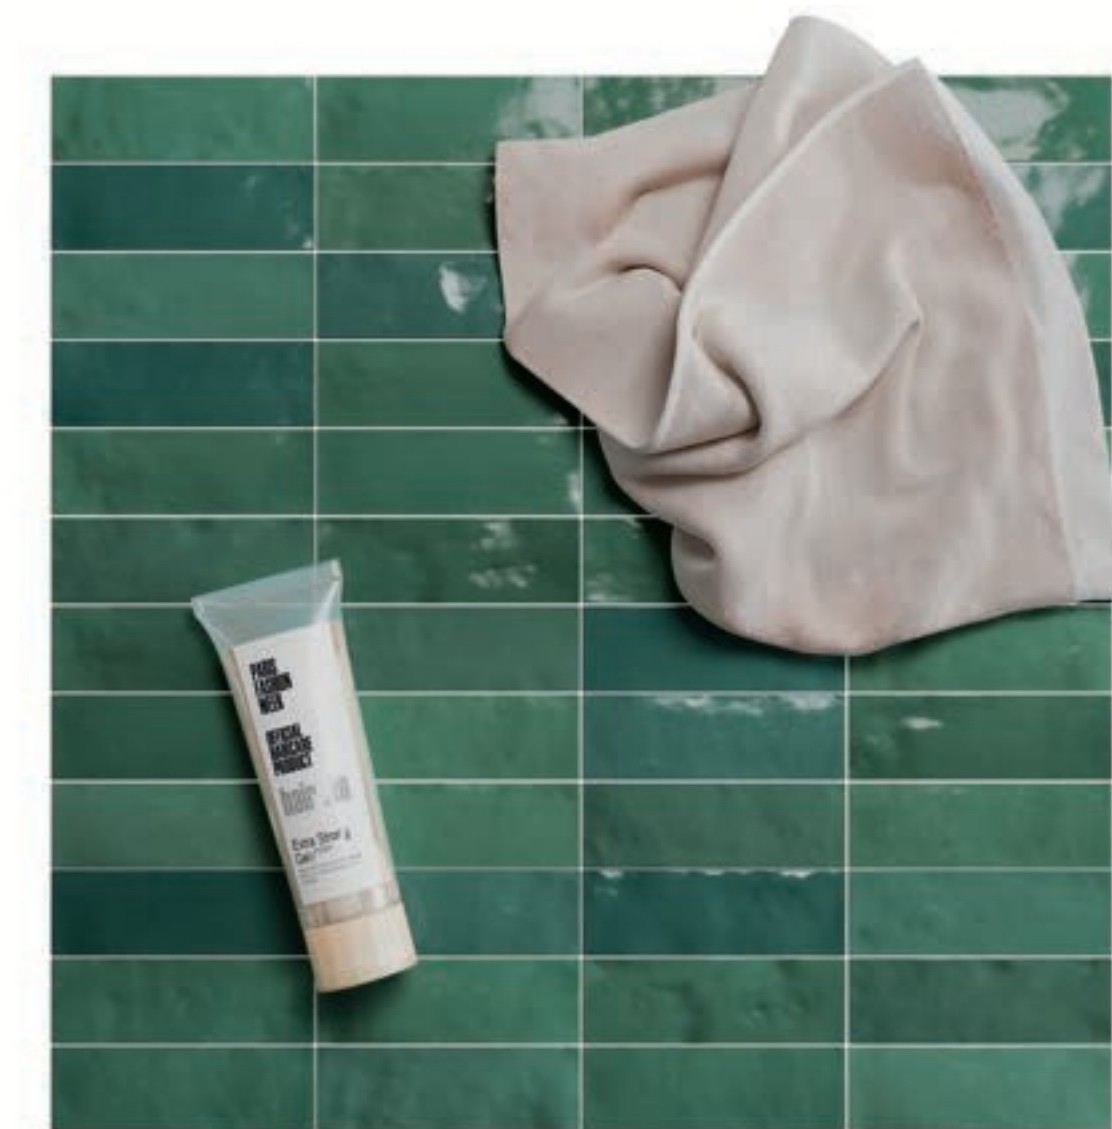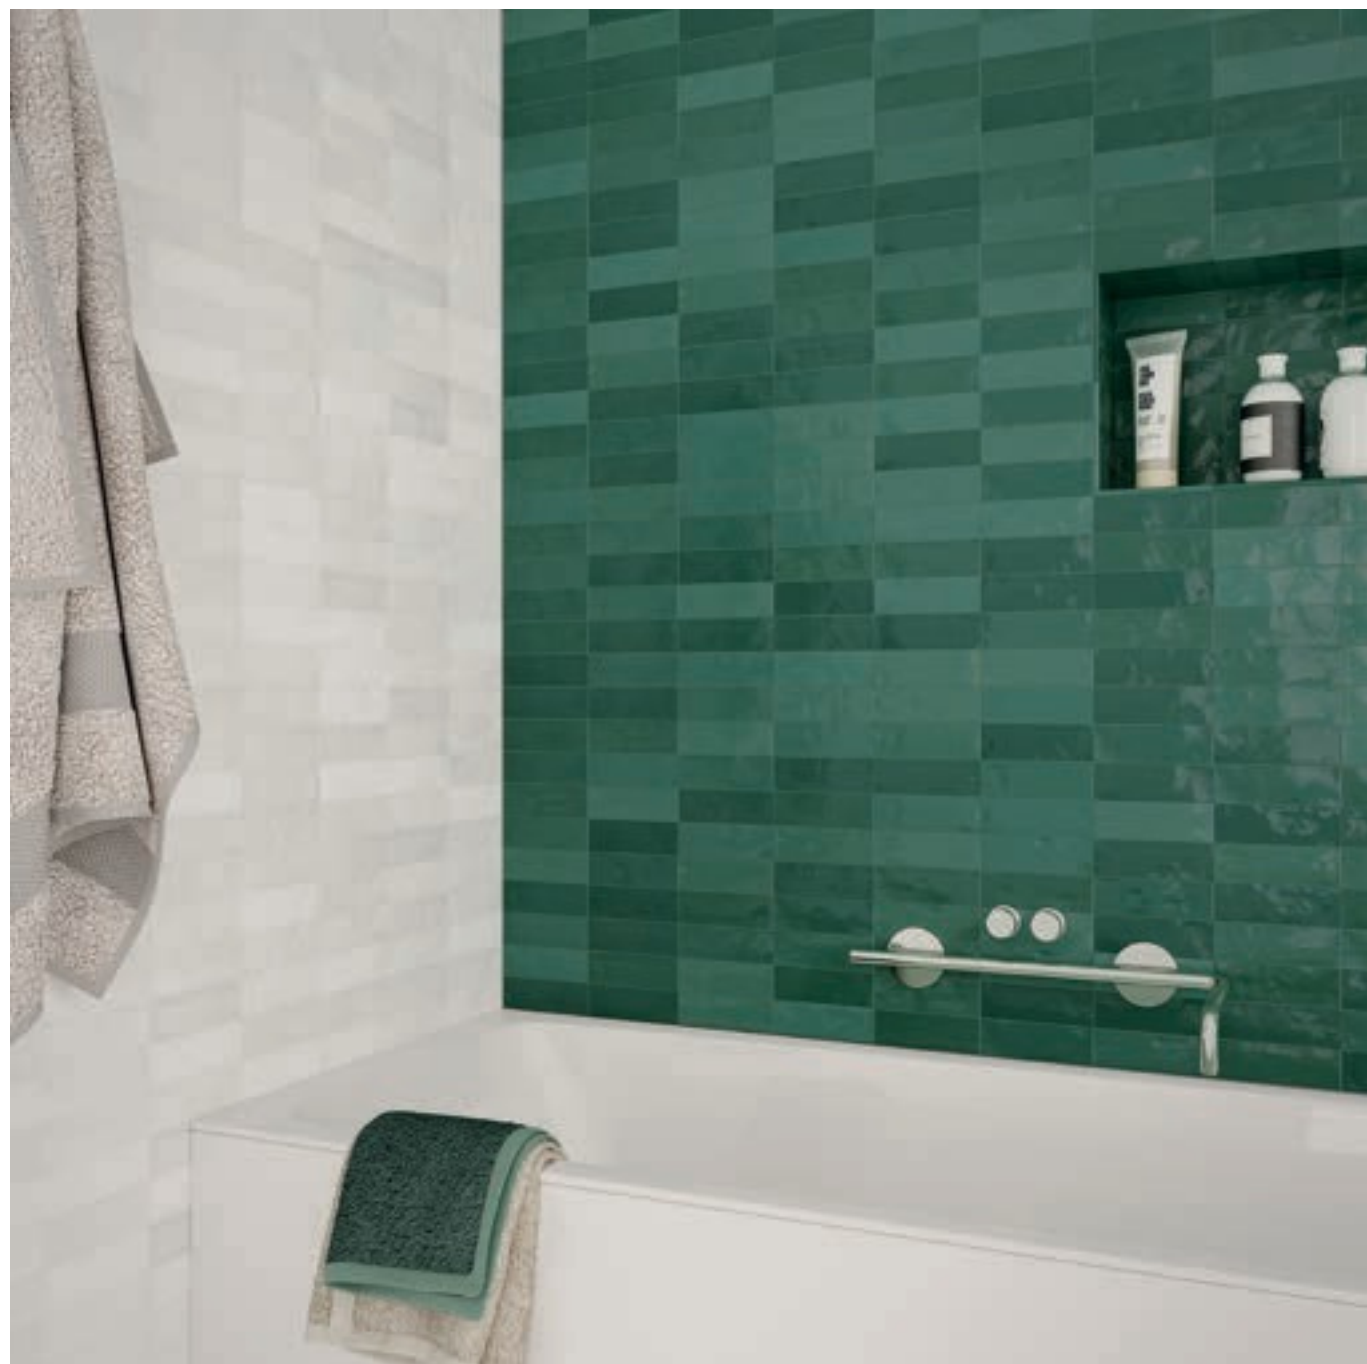

Soluna Emerald, Soluna White, Soluna Rounded Edge Emerald

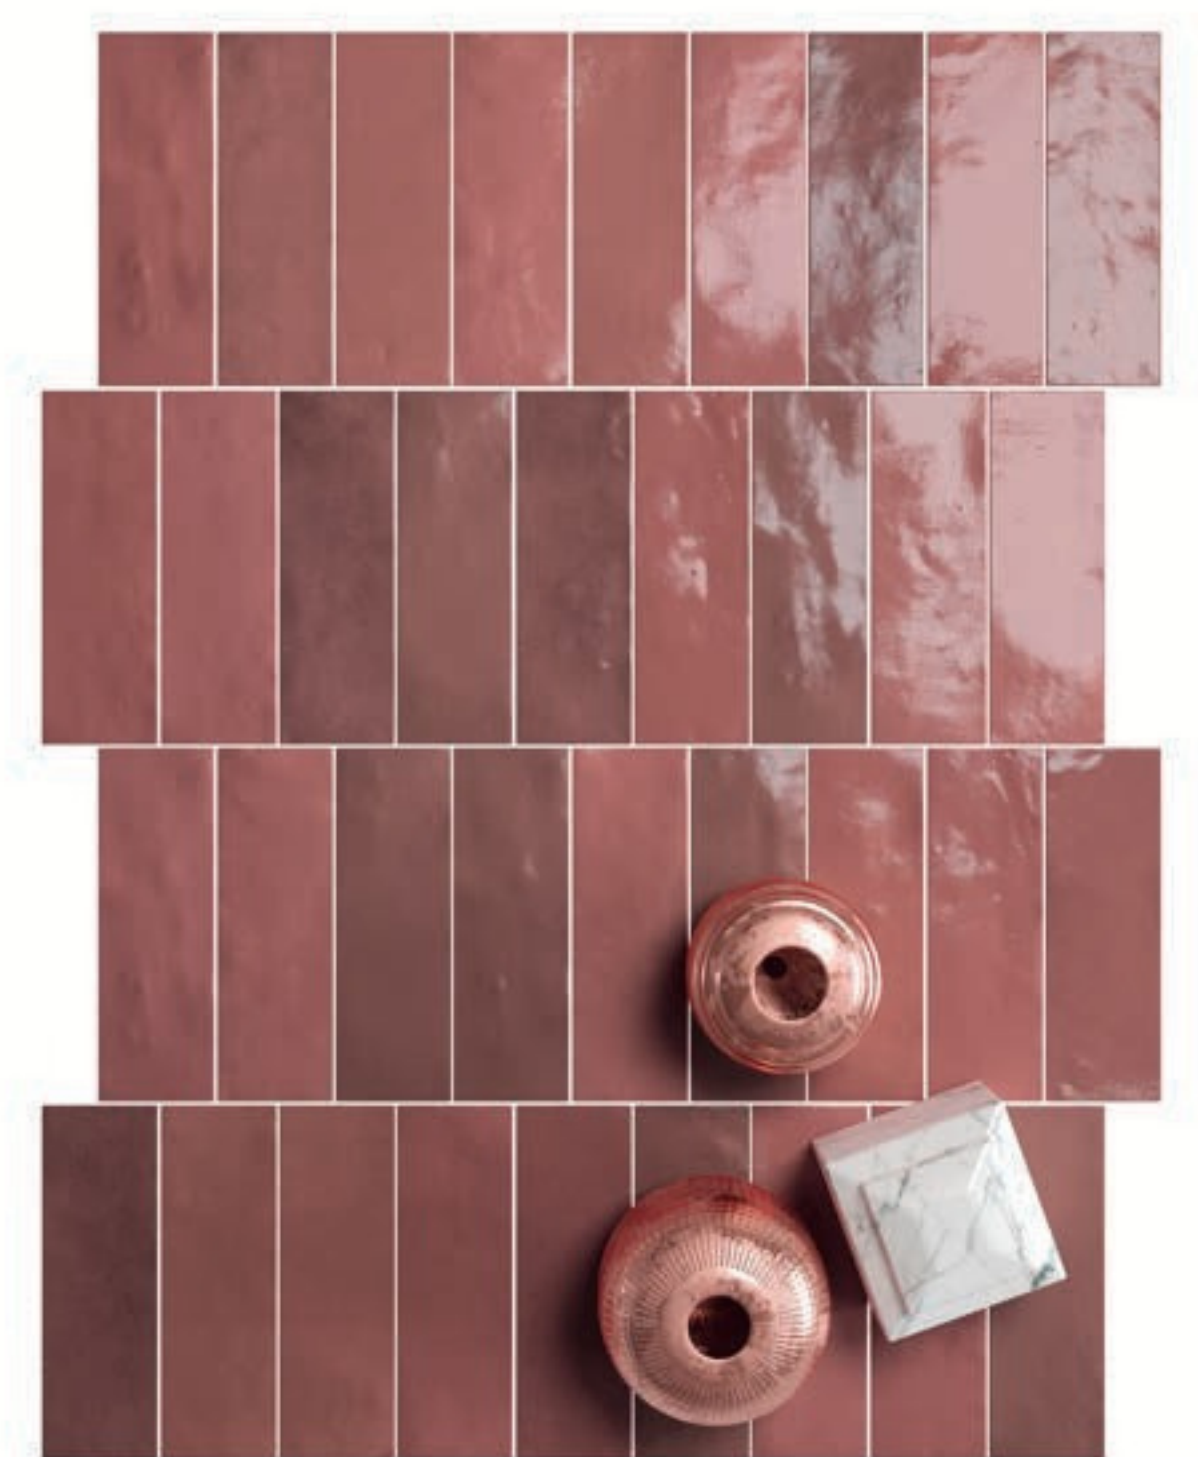












Soluna Graphite



Soluna Aqua - 50% & **Soluna White** - 50%



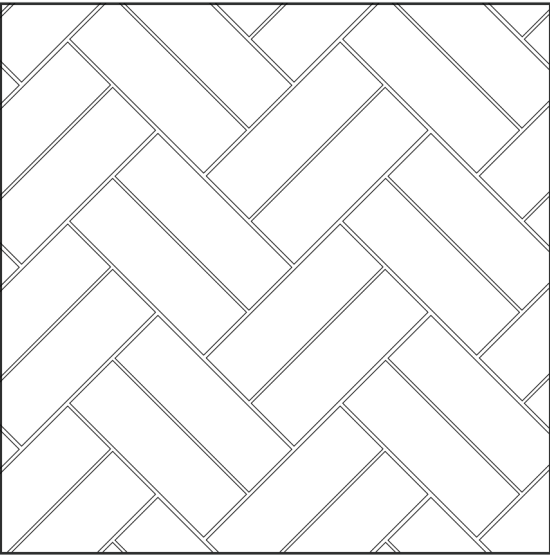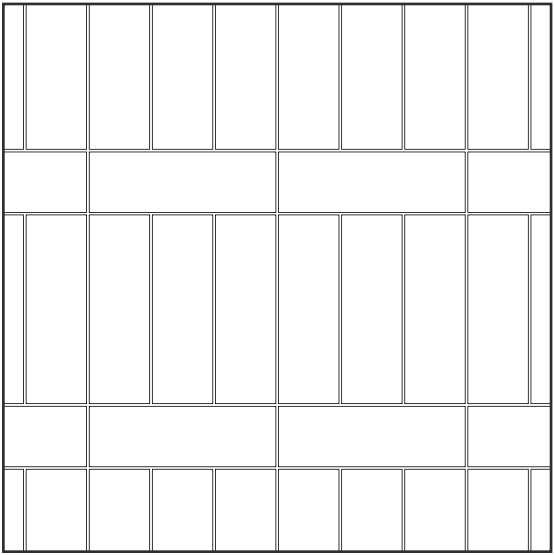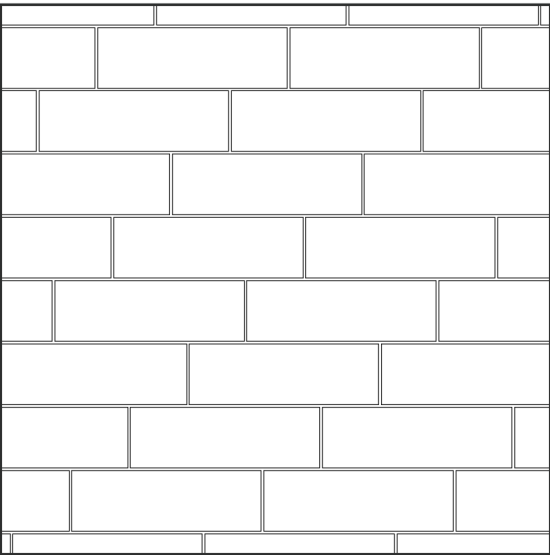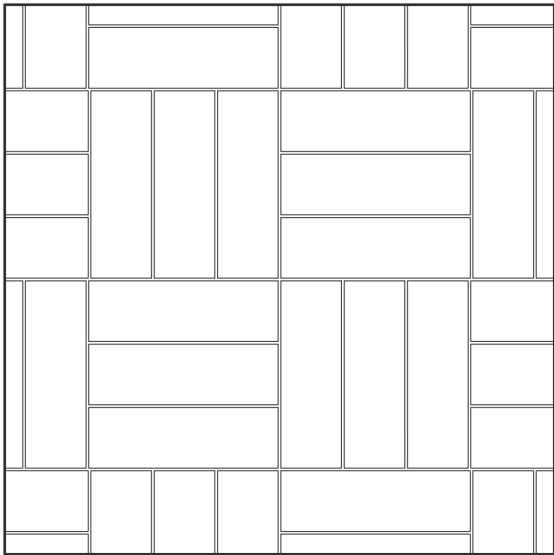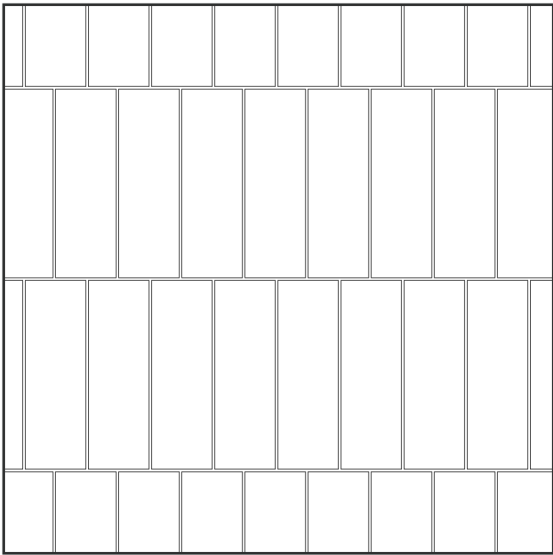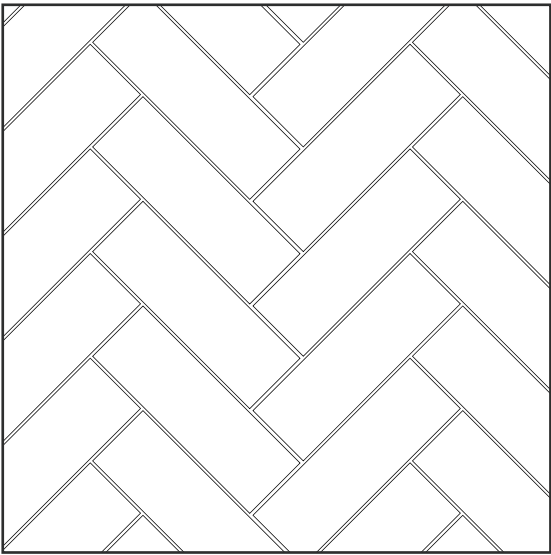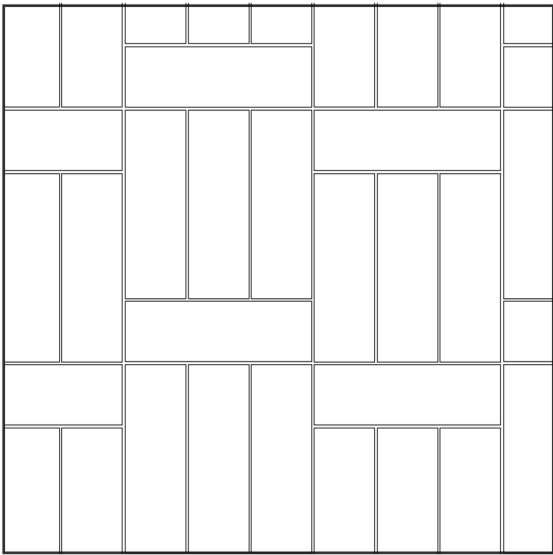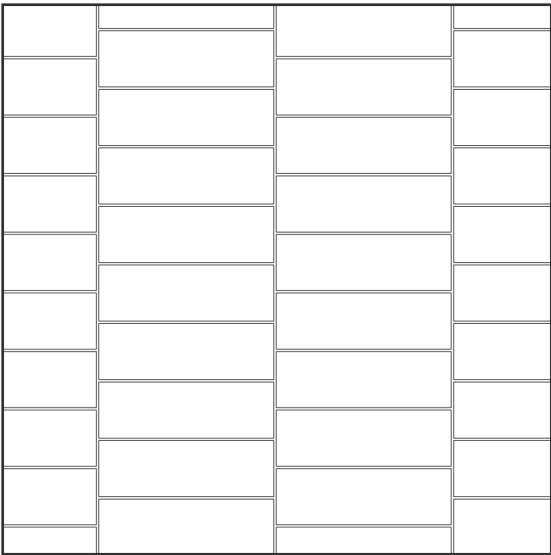

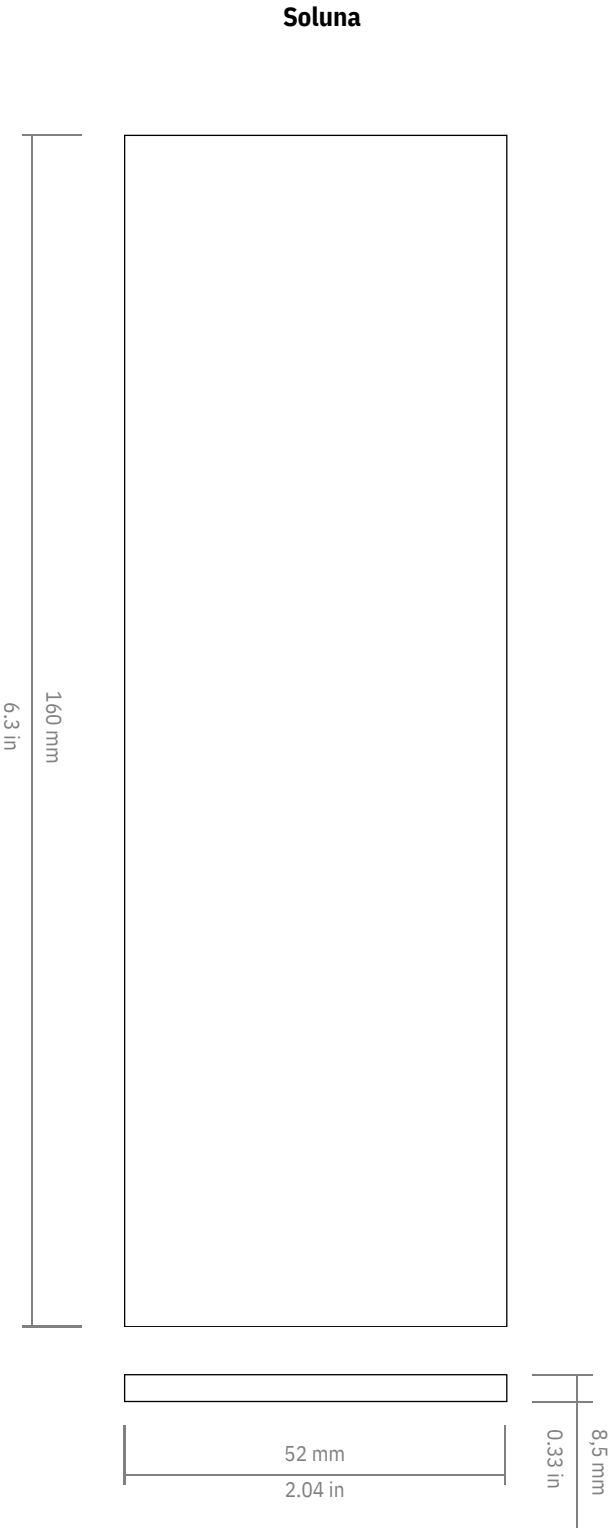

Technical features for Dry-Pressed ceramic tiles with water absorption BIII (Eb >10%) Características técnicas para las baldosas cerámicas prensadas en seco del grupo BIII (Eb >10%) FEATURES / CARACTERÍSTICASPECIFICATION / ESPECIFICACIÓNNORMA			
	Dimensional Features	52 mm +/- 0,75 mm x 160 mm +/- 0,5% x 8,5 mm +/- 5%	UNE-EN ISO 10545-2:2019
	Water absorption	Eb>10%	UNE-EN ISO 10545-3:2018
	Modulus of rupture and breaking strength	Thickness ≥ 7,5 mm mínimo 12 N/mm2 Thickness < 7,5 mm mínimo 15 N/mm2	UNE-EN ISO 10545-4:2019
	Crazing resistance	Pass	UNE-EN ISO 10545-11:1997
	Household products resistance	GA	UNE-EN ISO 10545-13:2017
	Chemical resistance	GHA	UNE-EN ISO 10545-13:2017
	Stain resistance	>3	UNE-EN ISO 10545-14:2015
	Tone Variation	V4	-
	White Body	-	-

MODEL / MODELO	PRICE CODE / CODIGO TARIFA
Soluna	D25
Soluna ROUNDED EDGE	DS2

Packing

						
Modelo	Formato (cm)	Piezas / Caja	Kg / Caja	m2 / Caja	Cajas / Palet	m2 / Palet
Soluna	5,2x16 cm	85	9,18 kg	0,712 m2	100	67,500 m2
Soluna ROUNDED EDGE	1,1x16 cm	10	0,25 kg	1,595 m	200	319,000 m

						
Model	Format (in)	Pieces / Box	Lb / Box	sq ft / Box	Boxes / Pallet	sq ft / Pallet
Soluna	2"x6.3"	85	20,24 lb	7,663 sq ft	100	766,3 sq ft
Soluna ROUNDED EDGE	0.43"x6.3"	10	0,55 lb	5,232 ft	200	1046,4 ft

WAREHOUSING

In order to guarantee the characteristics of the finish the product must be kept in its original packaging until the time of fixing. If the product is likely to be stored for a long period of time it should be suitably covered.

TILE FIXING

To ensure the products adhere correctly to the surface, it is essential to use specific adhesive and grouting material. This must also be suitable for the environment they will have to withstand. Fitting with traditional mortars does not ensure good adhesion. Due to the nature of the material there may be dimensional variations between pieces. Therefore , all types of joints must be planned and carried out correctly: structural, perimeter, expansion and installation joints. Fitting tiles without joints is not advisable from any technical point of view as this may lead to various problems.

MAINTENANCE AND CLEANING

Once the materials have been fitted, it is advisable to remove any remaining adhesive and grouting material by using a commercial descaling product designed especially, diluted with water . The descaling product must not remain in contact with the surface to be cleaned for more than 5 minutes. As a general guideline, powder dertergents should not be used, not wire wool or abrasive materials. Generally a sponge will be sufficient with warm water and liquid neutral soap. Then rinse with plenty of clean water.

ALMACENAMIENTO

Para garantizar las características de su acabado, el producto debe mantenerse en su embalaje original hasta el momento de la colocación. Si el producto va a permanecer almacenado durante un largo periodo es conveniente hacerlo bajo cubierta.

COLOCACIÓN

Para garantizar una buena adhesión al soporte es necesaria la utilización de materiales de agarre y de rejuntado adecuados al ambiente al que vayan a estar sometidos. La colocación con mortero tradicionales no garantiza una buena adhesión. Debido a la naturaleza del material pueden existir diferencias dimensionales entre piezas. Por ello deberán planificarse y ejecutarse correctamente todo tipo de juntas: estructurales, perimetrales, de dilatación y de colocación. La colocación sin juntas es desaconsejable desde cualquier punto de vista técnico, pudiéndose el origen de diversas patologías.

MANTENIMIENTO Y LIMPIEZA

Finalizada la puesta en obra se recomienda eliminar los restos de materiales de agarre y rejuntado con un desincrustante comercial diseñado expresamente para baldosas cerámicas, rebajado con agua, permaneciendo en contacto con la superficie a limpiar no más de 5 minutos. Como norma general no deben utilizarse detergentes en polvo ni estropajos metálicos o abrasivos. Generalmente será suficiente con una esponja, agua tibia y un jabón líquido neutro. Posteriormente aclarar con abundante agua limpia.