



ELM SURFACES

MINCE The “Mince” collection evokes a serene and refined atmosphere, like a coastal landscape bathed in a gentle breeze. Its subtle and sophisticated shades create a sense of calm, where each piece invites reflection and rest. The hues resemble transitions in nature, where daylight and elements blend fluidly, creating spaces that breathe balance and harmony. When contemplating its surfaces, a subtle connection with nature is perceived, as if each piece carries with it a story of serenity, wind, and horizon. La colección “Mince” evoca una atmósfera serena y refinada, como un paisaje costero bañado por una brisa suave. Sus tonos sutiles y sofisticados crean una sensación de calma, donde cada pieza invita a la reflexión y al descanso. Los matices recuerdan a transiciones de la naturaleza, donde la luz del día y los elementos se mezclan de forma fluida, generando espacios que respiran equilibrio y armonía. Al contemplar sus superficies, se percibe una conexión sutil con la naturaleza, como si cada pieza trajera consigo una historia de serenidad, viento y horizonte.



COLLECTION SUMMARY <i>RESUMEN DE LA COLECCIÓN</i>	<i>pag. 5</i>
APPLICATIONS <i>USOS</i>	<i>pag. 5</i>
GET INSPIRED <i>INSPIRATE</i>	<i>pag. 6</i>
TECHNICAL DRAWINGS <i>DIBUJOS TÉCNICOS</i>	<i>pag. 36</i>
TECHNICAL FEATURES <i>CARACTERÍSTICAS TÉCNICAS</i>	<i>pag. 37</i>
PRICE CODE <i>CÓDIGO DE TARIFA</i>	<i>pag. 38</i>
PACKING	<i>pag. 38</i>
RECOMENDATIONS <i>RECOMENDACIONES</i>	<i>pag. 39</i>




Collection summary - Resumen de la colección


MINCE 3,7x31 cm / 1.5"x12.2" PEI 2-4 P \$ D26



White



Aquamarine



Khaki




Bone



Lavender



Opal Blue



Forest



Indigo

Applications - Usos


Indoor / Interior	Outdoor / Exterior	Floor / Pavimento	Wall / Pared	Pool / Piscina	Non-slip / Antislip



Mince Forest



Mince Indigo

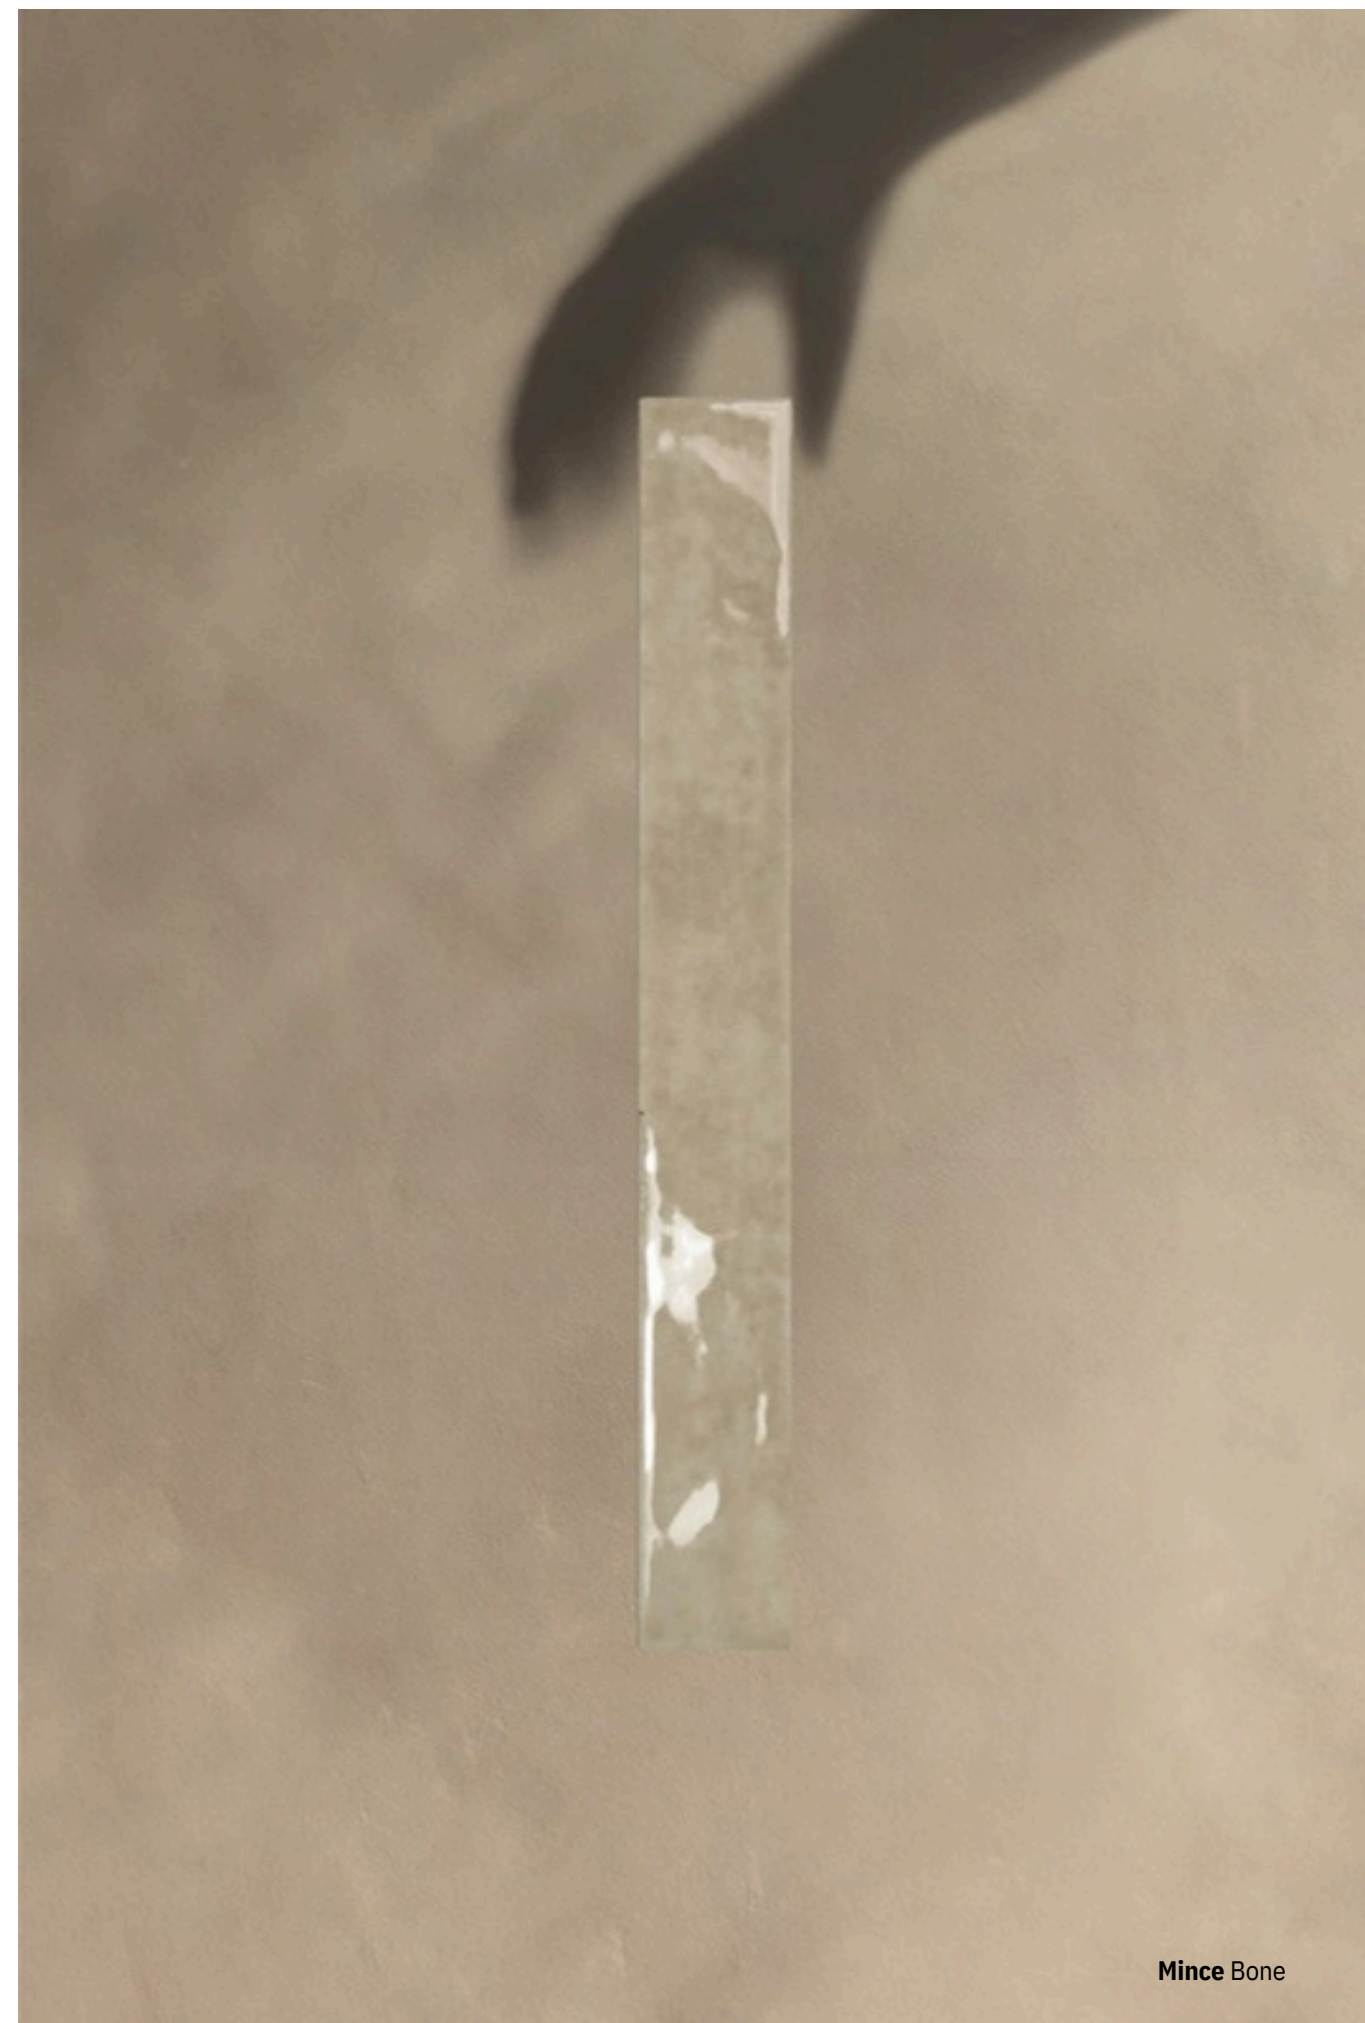

Mince Bone



Mince Opal Blue, White
Floor: Wood Grey (Limestone collection)



Mince White
Shelving: Mince White 33,33%, Indigo 33,33%, Opal Blue 33,33%





Mince Lavender







Mince White



Mince Khaki





Mince Bone





Mince Aquamarine
Floor: Grey (Pietra collection)





Mince Aquamarine
 Floor: Grey (Pietra collection)



Mince Lavender



Mince Forest





Mince Opal Blue
Floor: Square Chalk (Clay collection)



Dry-pressed porcelain tiles with water absorption B Ia ≤ 0,5% for interior and exterior floors and walls. Baldosas cerámicas prensadas en seco con absorción de agua B Ia ≤ 0,5% para suelos y paredes interiores y exteriores.			
FEATURES / CARACTERÍSTICAS	SPECIFICATION / ESPECIFICACIÓN		NORMA
	Dimensional Features	37 mm +/- 0,5 mm x 310 mm +/- 1,8 mm x 8,5 mm +/- 0,5 mm	UNE-EN ISO 10545-2:2019
	Water absorption	Eb ≤ 0,5%	UNE-EN ISO 10545-3:2018
	Modulus of rupture and breaking strength	Minimum 35 N/mm2 < Individual Minimum 32 N/mm2	UNE-EN ISO 10545-4:2019
	Crazing resistance	Pass	UNE-EN ISO 10545-11:1997
	Household products resistance	GA	UNE-EN ISO 10545-13:2017
	Chemical resistance	GHA	UNE-EN ISO 10545-13:2017
	Stain resistance	>3	UNE-EN ISO 10545-14:2015
	Frost resistance	Pass	UNE-EN ISO 10545-11:1997
	Abrasive Resistance	PEI 4: White PEI 3: Lavender, Khaki, Opal Blue, Aquamarine & Bone PEI 2: Forest & Indigo	UNE-EN ISO 10545-7:1999
	Tone Variation	V4	-
	Porcelain Body	-	-

MODEL / MODELO	PRICE CODE / CODIGO TARIFA
MINCE	D26

Packing

						
Modelo	Formato (cm)	Piezas / Caja	Kg / Caja	m2 / Caja	Cajas / Palet	m2 / Palet
MINCE	3,7x31 cm	40	8,86 kg	0,459 m2	96	44,064 m2

						
Model	Format (in)	Pieces / Box	Lb / Box	sq ft / Box	Boxes / Pallet	sq ft / Pallet
MINCE	1.5"x12.2"	40	19,53 lb	4,941 sq ft	96	474,301 sq ft

WAREHOUSING

In order to guarantee the characteristics of the finish the product must be kept in its original packaging until the time of fixing. If the product is likely to be stored for a long period of time it should be suitably covered.

TILE FIXING

To ensure the products adhere correctly to the surface, it is essential to use specific adhesive and grouting material. This must also be suitable for the environment they will have to withstand. Fitting with traditional mortars does not ensure good adhesion. Due to the nature of the material there may be dimensional variations between pieces. Therefore, all types of joints must be planned and carried out correctly: structural, perimeter, expansion and installation joints. Fitting tiles without joints is not advisable from many technical points of view as this may lead to various problems.

MAINTENANCE AND CLEANING

Once the materials have been fitted, it is advisable to remove any remaining adhesive and grouting material by using a commercial descaling product designed especially, diluted with water. The descaling product must not remain in contact with the surface to be cleaned for more than 5 minutes. As a general guideline, powder detergents should not be used, not wire wool or abrasive materials. Generally a sponge will be sufficient with warm water and liquid neutral soap. Then rinse with plenty of clean water.

ALMACENAMIENTO

Para garantizar las características de su acabado, el producto debe mantenerse en su embalaje original hasta el momento de la colocación. Si el producto va a permanecer almacenado durante un largo periodo es conveniente hacerlo bajo cubierta.

COLOCACIÓN

Para garantizar una buena adhesión al soporte es necesaria la utilización de materiales de agarre y de rejuntado adecuados al ambiente al que vayan a estar sometidos. La colocación con mortero tradicional no garantiza una buena adhesión. Debido a la naturaleza del material pueden existir diferencias dimensionales entre piezas. Por ello deberán planificarse y ejecutarse correctamente todo tipo de juntas: estructurales, perimetrales, de dilatación y de colocación. La colocación sin juntas es desaconsejable desde cualquier punto de vista técnico, pudiéndose el origen de diversas patologías.

MANTENIMIENTO Y LIMPIEZA

Finalizada la puesta en obra se recomienda eliminar los restos de materiales de agarre y rejuntado con un desincrustante comercial diseñado expresamente para baldosas cerámicas, rebajado con agua, permaneciendo en contacto con la superficie a limpiar no más de 5 minutos. Como norma general no deben utilizarse detergentes en polvo ni estropajos metálicos o abrasivos. Generalmente será suficiente con una esponja, agua tibia y un jabón líquido neutro. Posteriormente aclarar con abundante agua limpia.