



 ELM SURFACES

Local



Local Moss 3"x6"



Local Cloud 3"x6"

CERAMIC WALL

Local

Inspired by the essence of nature and the elements that shape our world, Local reflects the beauty found in raw textures, earthy tones, deep waters, endless skies, and volcanic landscapes.

Each color was thoughtfully created to evoke a feeling, a place, and a connection to the origins of life through a handcrafted and contemporary expression.

Ceramic Wall

 | 4"x4" - 3"x12" - 3"x6"

Local

7-7.3

mm

B

V2

25%

RECYCLED

4"x4"

10.95x10.95 cm



Cloud



Sandstone



Aqua



Local

7-7.3

mm

B


V2

25%


RECYCLED

4"x4"


10.95x10.95 cm

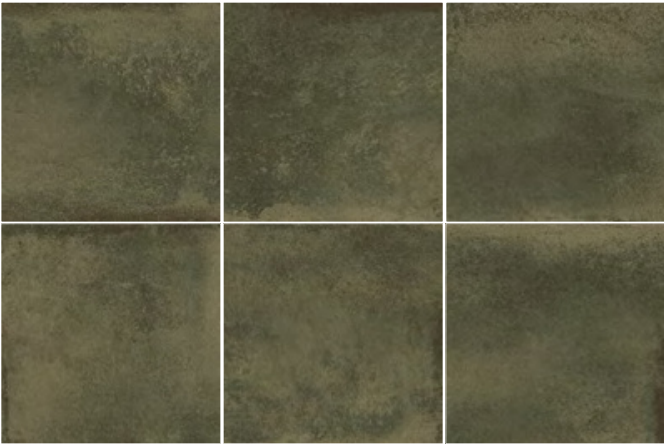


Moss



Sunset



Marine



Local

7-7.3

mm

B

V2

25%
RECYCLED

3"x12"

7.72x30.47 cm

3"x6"

7.70x15cm



Cloud

3"x12" Bright

3"x6" Bright



Sandstone

3"x12" Bright

3"x6" Bright



Aqua

3"x12" Bright

3"x6" Bright

Local

7-7.3

mm

B

V2

25%
RECYCLED

3"x12"

7.72x30.47 cm

3"x6"

7.70x15cm



Moss

3"x12" Bright

3"x6" Bright



Sunset

3"x12" Bright

3"x6" Bright



Marine

3"x12" Bright

3"x6" Bright

Local

Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	ISO-10545/3	<7.0% <wa 20%
Break Strength	ISO-10545/4	≥125 lbf
Chemical Resistance	C650	Unaffected
Frost Resistance	C1026	Unaffected
Thermal Shock Resistance	ISO-10545/9	Resistant
Crazing Resistance	ISO-10545/11	Resistant
Group	See FAQ's	1
PEI	C1027	Not Applicable
Dynamic Coefficient of Friction (DCOF) Shade and Texture Rating	A326.3	Not Applicable
Facial Dimensions	CTDA	V2
Range of Thickness	C499	Pass
Warpage	C499	Pass
Wedging	C485	Pass
	C502	Pass

Packaging Info

Size	SF percarton	PC percarton	BX perpallet
3"x12"	12.65	50	84
3"x6"	10.24	80	76
4"x4"	10.00	80	55

Recommended Applications



INDOR
WALLS



SHOWER
WALLS



STEAM ROOM
WALLS