



4,6x37,5 cm / 1.8"x14.5"
Wall & floor tiles

Porcelain Body
9 colours

MIX

MIX

“Mix” is a collection that plays with contrasts and nuances. Its slender format allows compositions that alternate between gloss and texture, softness and character.


The blend of finishes brings balance and variety, creating spaces that feel authentic, contemporary, and full of personality.

A collection that invites you to design unique environments filled with harmony and character.


“Mix” es una colección que juega con contrastes y matices. Su formato estilizado permite composiciones que alternan brillo y textura, suavidad y carácter.

La mezcla de acabados aporta equilibrio y variedad, dando lugar a espacios que se sienten auténticos, actuales y con una personalidad propia.

Una colección que invita a crear ambientes únicos, llenos de armonía y carácter.




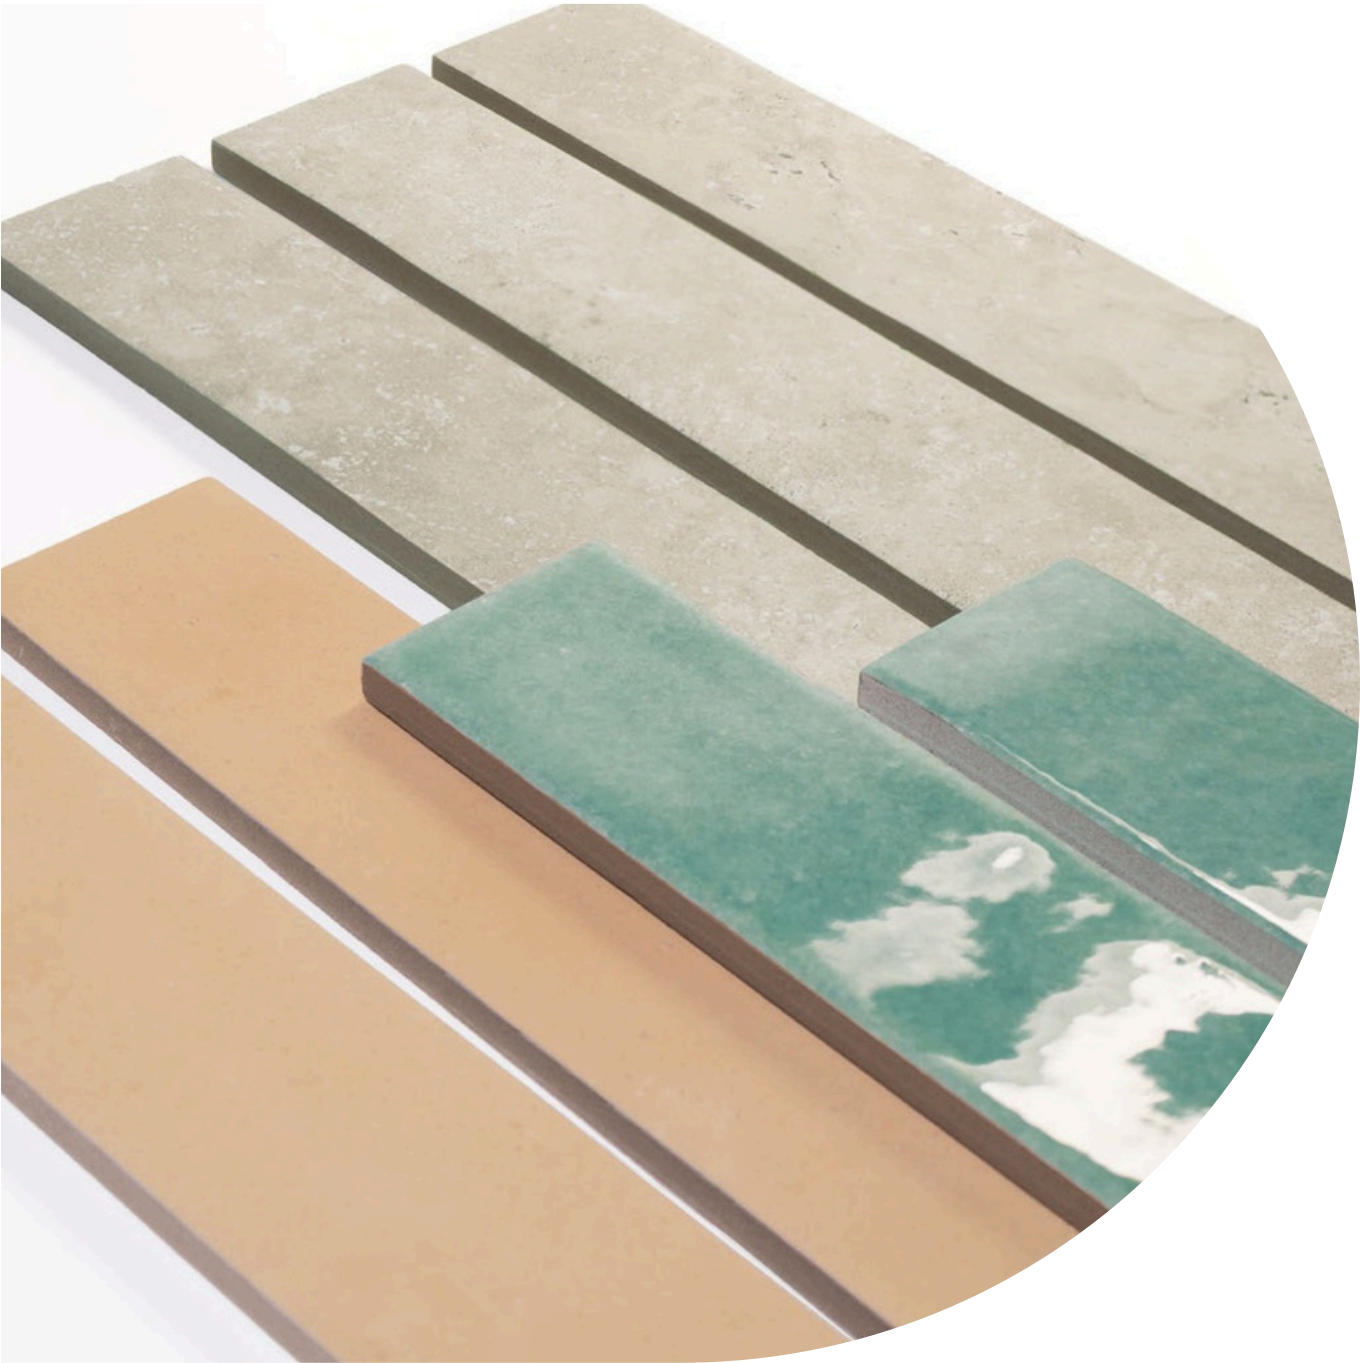


COLLECTION SUMMARY	<i>pag. 5</i>
<i>RESUMEN DE LA COLECCIÓN</i>	
APPLICATIONS	<i>pag. 5</i>
<i>USOS</i>	
GET INSPIRED	<i>pag. 6</i>
<i>INSPIRATE</i>	
TECHNICAL DRAWINGS	<i>pag. 36</i>
<i>DIBUJOS TÉCNICOS</i>	
TECHNICAL FEATURES	<i>pag. 37</i>
<i>CARACTERÍSTICAS TÉCNICAS</i>	
PRICE CODE	<i>pag. 38</i>
<i>CÓDIGO DE TARIFA</i>	
PACKING	<i>pag. 38</i>
RECOMMENDATIONS	<i>pag. 39</i>
<i>RECOMENDACIONES</i>	

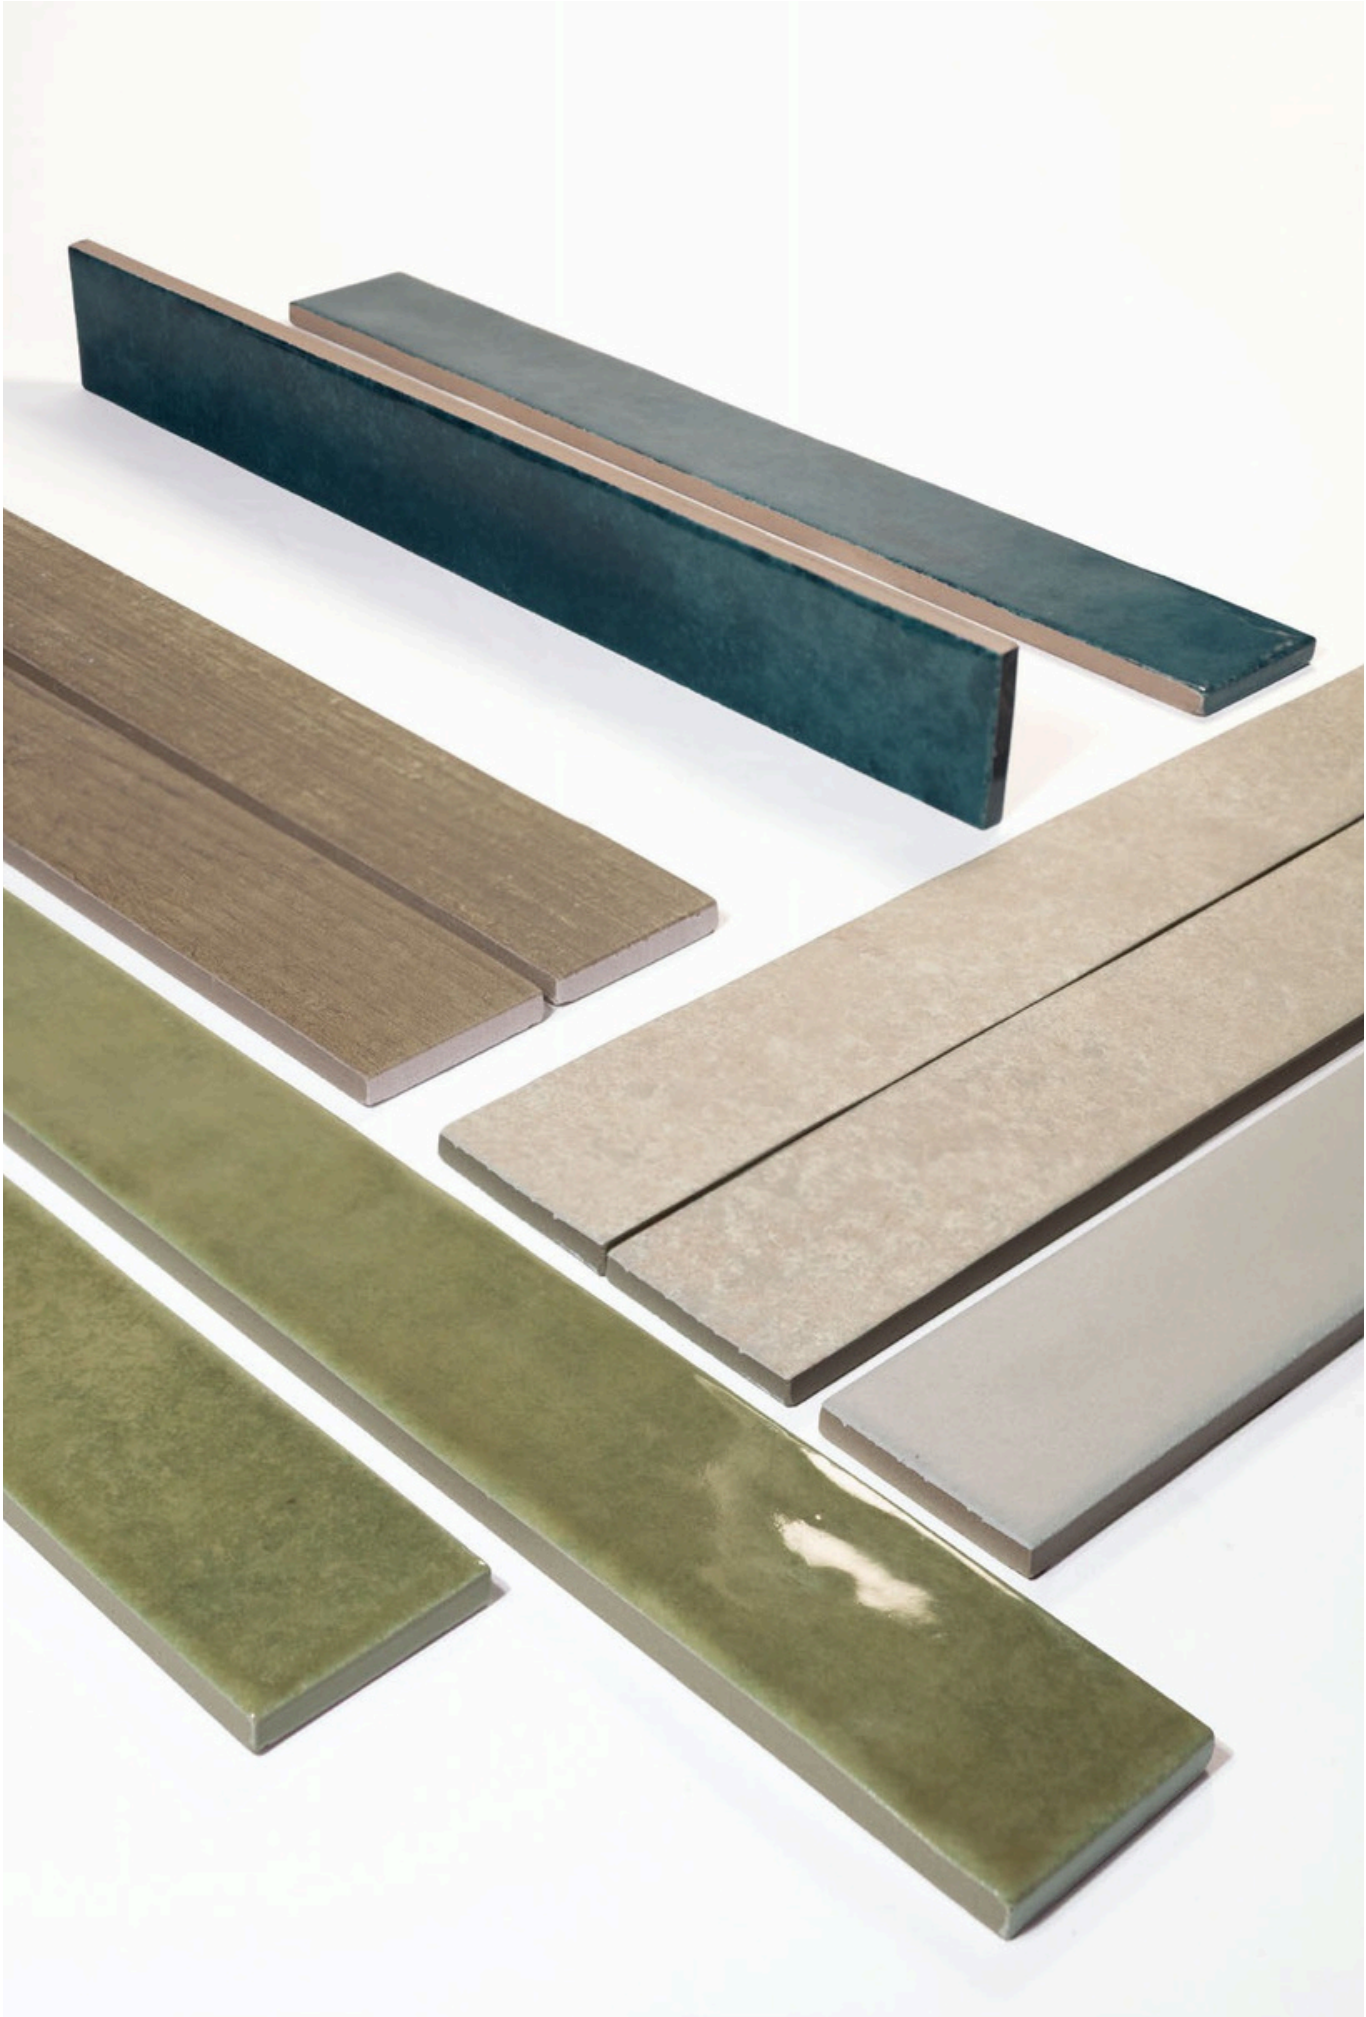

Collection summary - Resumen de la colección

MIX 4,6x37,5 cm / 1.8"x14.5" P \$ D31

								
Lagoon Gloss	Leaf Gloss	Marine Gloss	Concrete	Marble	Stone	Sand	Natural	Walnut

Applications - Usos

Indoor / Interior	Outdoor / Exterior	Floor / Pavimento	Wall / Pared	Pool / Piscina	Non-slip / Antislip
					R10 / Class 2 / DCOF > 0,42 (Except Gloss)



Mix Concrete 75% & Marine Gloss 25%

Arch: **Mix** Marine Gloss

Bar: **Mix** Marine Gloss & Concrete







Mix Leaf Gloss



Wall: **Mix** Lagoon Gloss 90% & Marble 10% (random pattern)

Kitchen island side panel: **Mix** Lagoon Gloss

Floor: **Mix** Marble & Lagoon Gloss



Mix Lagoon Gloss

Floor: **Mix** Natural



Mix Walnut
Floor: Graphite (Pietra collection)





Mix Sand

Floor: **Mix** Concrete



Mix Sand 25% & Leaf Gloss 75% (random pattern) Floor:

Mix Walnut






Mix Marble





Mix Marine Gloss

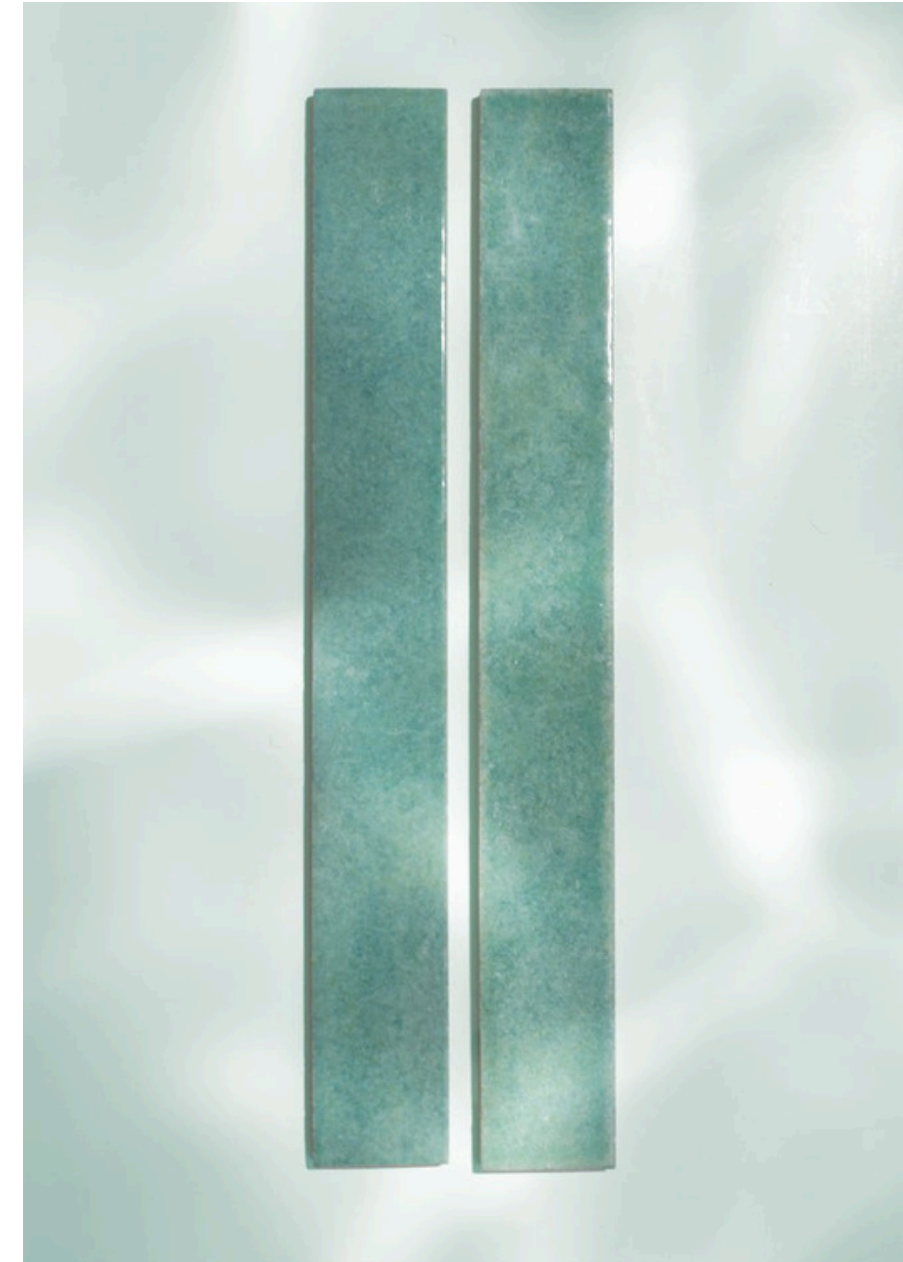

Mix Lagoon Gloss



Mix Natural

Fireplace: **Mix Leaf Gloss**

Floor: **Mix Walnut 90% & Leaf Gloss 10% (random pattern)**



Mix Marine Gloss

Floor: **Mix** Walnut 45%, Concrete 45% & Marine Gloss 10% (random pattern)





Mix Concrete & Walnut




Mix Walnut 30% & Stone 70% (random pattern)

Floor: **Mix** Walnut



Mix Natural & Leaf Gloss

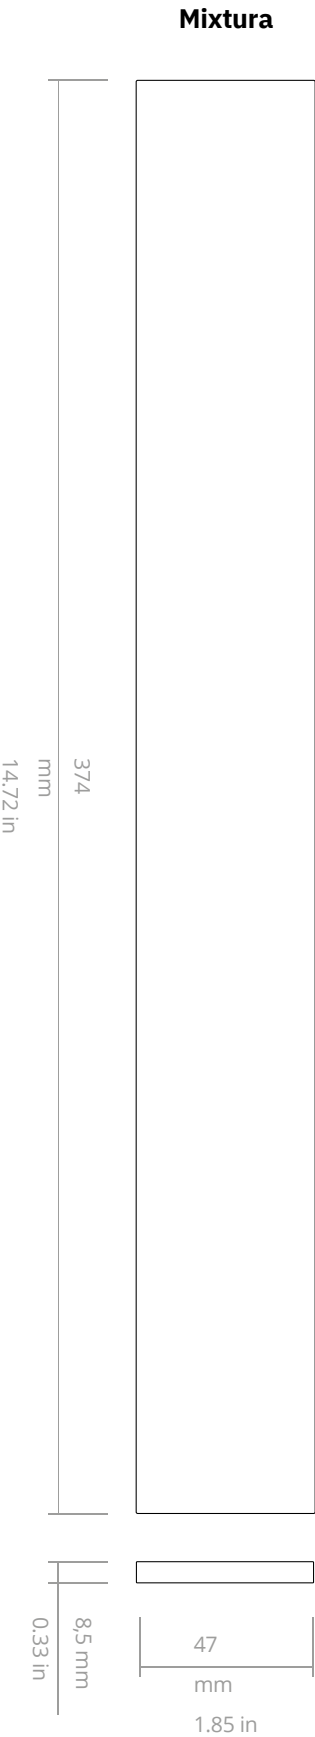

Dry-pressed porcelain tiles with water absorption B Ia ≤ 0,5% for interior and exterior floors and walls. Baldosas cerámicas prensadas en seco con absorción de agua B Ia ≤ 0,5% para suelos y paredes interiores y exteriores.			
FEATURES / CARACTERÍSTICAS	SPECIFICATION / ESPECIFICACIÓN		NORMA
 Dimensional Features	47 ± 0,5mm x 374 ± 2mm x 8,5 mm ± 0,5mm		UNE-EN ISO 10545-2:2019
 Water absorption	< 0.5%		UNE-EN ISO 10545-3:2018
 Modulus of rupture and breaking strength	≥ 35 N/mm ² ≥ 1300 N		UNE-EN ISO 10545-4:2019
 Crazing resistance	Pass		UNE-EN ISO 10545-11:1997
 Household products resistance	GA		UNE-EN ISO 10545-13:2017
 Chemical resistance	GHA		UNE-EN ISO 10545-13:2017
 Stain resistance	5		UNE-EN ISO 10545-14:2015
 Abrasive Resistance	PEI 2: Walnut & Marine Gloss PEI 3: Concrete, Natural & Leaf Gloss PEI 4: Stone, Marble, Sand & Lagoon Gloss		UNE-EN ISO 10545-7:1999
 Frost resistance	Pass		UNE-EN ISO 10545-11:1997
 Non-slip Value	R10 / Class 2 / DCOF > 0.42 Gloss: Class 0 / DCOF < 0.42		UNE-EN 16165:2022 / ANSI A137.1:2012
 Tone Variation	V4		-
 Porcelain Body	-		-

MODEL / MODELO	PRICE CODE / CODIGO TARIFA
MIX TURA	D31

Packing

			KG 	M2 		M2 
Modelo	Formato (cm)	Piezas / Caja	Kg / Caja	m2 / Caja	Cajas / Palet	m2 / Palet
MIX TURA	4,6x37,5 cm	17	5,77 kg	0,293 m²	120	35,160 m²

			LB 	SQ FT 		SQ FT 
Model	Format (in)	Pieces / Box	Lb / Box	sq ft / Box	Boxes / Pallet	sq ft / Pallet
MIX TURA	1.8"x14.5"	17	12.72 lb	3.154 sq ft	120	378.459 sq ft

WAREHOUSING
In order to guarantee the characteristics of the finish the product must be kept in its original packaging until the time of fixing. If the product is likely to be stored for a long period of time it should be suitably covered.

TILE FIXING
To ensure the products adhere correctly to the surface, it is essential to use specific adhesive and grouting material. This must also be suitable for the environment they will have to withstand. Fitting with traditional mortars does not ensure good adhesion.

Due to the nature of the material there may be dimensional variations between pieces. Therefore, all types of joints must be planned and carried out correctly: structural, perimeter, expansion and installation joints. Fitting tiles without joints is not advisable from any technical point of view as this may lead to various problems. For an optimal result we advise to use 2 mm (0.08”) grout.

MAINTENANCE AND CLEANING
Once the materials have been fitted, it is advisable to remove any remaining adhesive and grouting material by using a commercial descaling product designed especially, diluted with water . The descaling product must not remain in contact with the surface to be cleaned for more than 5 minutes.

As a general guideline, powder dertergents should not be used, not wire wool or abrasive materials. Generally a sponge will be sufficient with warm water and liquid neutral soap. Then rinse with plenty of clean water.

ALMACENAMIENTO
Para garantizarlas características de su acabado, el producto debe mantenerse en su embalaje original hasta el momento de la colocación. Si el producto va a permanecer almacenado durante un largo periodo es conveniente hacerlo bajo cubierta.

COLOCACIÓN
Paragarantizarunabuena adhesión al soporte es necesaria la utilizacióndemateriales de agarre y de rejuntado adecuados al ambientealquevayan a estar sometidos. La colocación con morterostradicionales no garantiza una buena adhesión.

Debido alanaturaleza del material pueden existir diferencias dimensionalesentrepiezas. Por ello deberán planificarse y ejecutarsecorrectamente todo tipo de juntas: estructurales, perimetrales,dedilatación y de colocación. La colocación sin juntasdesaconsejable desde cualquier punto de vista técnico,pudiendoser el origen de diversas patologías. Para un resultadoóptimorecomendamos usar 2 mm de junta.
MANTENIMIENTO Y LIMPIEZA
Finalizada la puesta en obra se recomienda eliminar los restos de materiales de agarre y rejuntado con un desincrustante comercial diseñado expresamente para baldosas cerámicas, rebajado con agua, permaneciendo en contacto con la superficie a limpiar no más de 5 minutos.

Como norma general no deben utilizarse detergentes en polvo ni estropajos metálicos o abrasivos. Generalmente será suficiente con una esponja, agua tibia y un jabón líquido neutro. Posteriormente aclarar con abundante agua limpia.