

CURTSY

Curtsy emerges from the meeting of earth and form. Each piece carries the imprint of craftsmanship: soft surfaces, gentle variations, the imperfect beauty of fired clay.

Its warm tones fill the space with a sense of closeness and balance. There is a quiet rhythm in this collection that connects with what is essential — an honest, intimate language, rich in nuance.

Curtsy nace del encuentro entre tierra y forma. Cada pieza conserva la huella de lo artesanal: superficies suaves, ligeras variaciones, la belleza imperfecta del barro cocido.

Sus tonos cálidos envuelven el espacio en una sensación de cercanía y equilibrio.

Hay en esta colección un ritmo pausado, casi silencioso, que conecta con lo esencial. Un lenguaje honesto, íntimo y lleno de matices.



COLLECTION SUMMARY <i>RESUMEN DE LA COLECCIÓN</i>	<i>pag. 5</i>
APPLICATIONS <i>USOS</i>	<i>pag. 5</i>
GET INSPIRED <i>INSPIRATE</i>	<i>pag. 6</i>
LAYOUTS <i>COLOCACIONES</i>	<i>pag. 32</i>
TECHNICAL DRAWINGS <i>DIBUJOS TÉCNICOS</i>	<i>pag. 32</i>
TECHNICAL FEATURES <i>CARACTERÍSTICAS TÉCNICAS</i>	<i>pag. 33</i>
PRICE CODE <i>CÓDIGO DE TARIFA</i>	<i>pag. 34</i>
PACKING	<i>pag. 34</i>
RECOMENDATIONS <i>RECOMENDACIONES</i>	<i>pag. 35</i>



Collection summary - Resumen de la colección

CURTSY 5,2x16 cm / 2”x6.3” W \$ D25 - 28



CURTSY DECOR 5,2x16 cm / 2”x6.3” W \$ D28



CURTSY SQUARE 18,5x18,5 cm / 7”x7” P \$ D20



CURTSY ROUNDED EDGE 1,1x16 cm / 0.43”x6.3” W \$ DS2




* Available in all Curtsy colours.
* Disponible en todos los colores Curtsy.

Applications - Usos

Curtsy - Curtsy Decor	Indoor / Interior	Outdoor / Exterior	Floor / Pavimento	Wall / Pared	Pool / Piscina	Non-slip / Antislip
Curtsy Square	Indoor / Interior	Outdoor / Exterior	Floor / Pavimento	Wall / Pared	Pool / Piscina	Non-slip / Antislip
						Class 2 / R10 >0,42



Curtsy Tobac 40% - Curtsy Decor Tobac
60% Floor: Curtsy Square Tobac

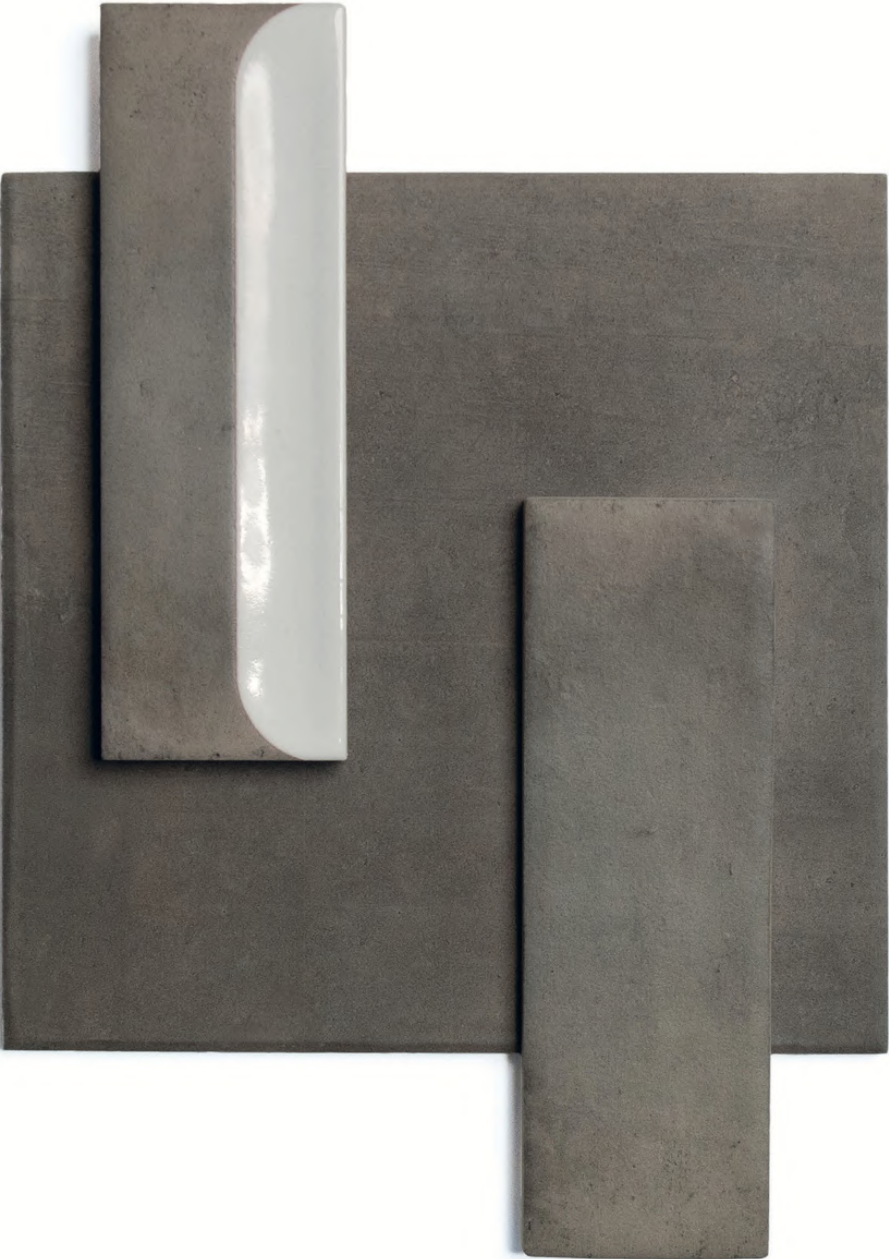



Curtsy Tobac 25% & Off White Gloss 25% - **Curtsy Decor** Tobac

50% *Floor*: **Curtsy Square** Tobac



Curtsy Cotto 60% & Off White Gloss 40% (random pattern)

Floor: **Curtsy Square** Cotto



Curtsy Square Natural

Baseboard: **Curtsy** Natural 33,3% & Off White Gloss 33,3% -
Curtsy Decor Natural 33,3% - Curtsy **Rounded Edge** Natural



Curtsy Natural 95% - **Curtsy Decor** Natural 5% (random pattern) - **Curtsy Rounded Edge**

Natural *Floor*: **Curtsy Square** Natural



Curtsy Natural, Tobac & Off White Gloss 33,3% - **Curtsy Decor** Natural 33,3% & Tobac
33,3% *Floor:* **Curtsy Square** Tobac



Curtsy Cotto - Curtsy Rounded Edge Cotto

Floor: Curtsy Square Cotto



Curtsy Tobac - Curtsy Decor Tobac



Curtsy Cotto - Curtsy Rounded Edge Cotto

Floor: Curtsy Square Cotto



Curtsy Cotto 50% & Natural 50% (random pattern)

Floor: **Curtsy Square** Cotto 50% & Natural 50% (random pattern)



Wall: **Curtsy** Natural 95% & Off White Gloss 5% (random pattern)

Shelf & Floor: **Curtsy Square** Natural





Curtsy Cotto 75% - Curtsy Decor Cotto


25% Floor: Curtsy Square Cotto



Wall: **Curtsy** Cotto & Tobac

Decorative border: **Curtsy** Tobac 33,33% - **Curtsy Decor** Cotto

66,67% Floor: **Curtsy Square** Tobac

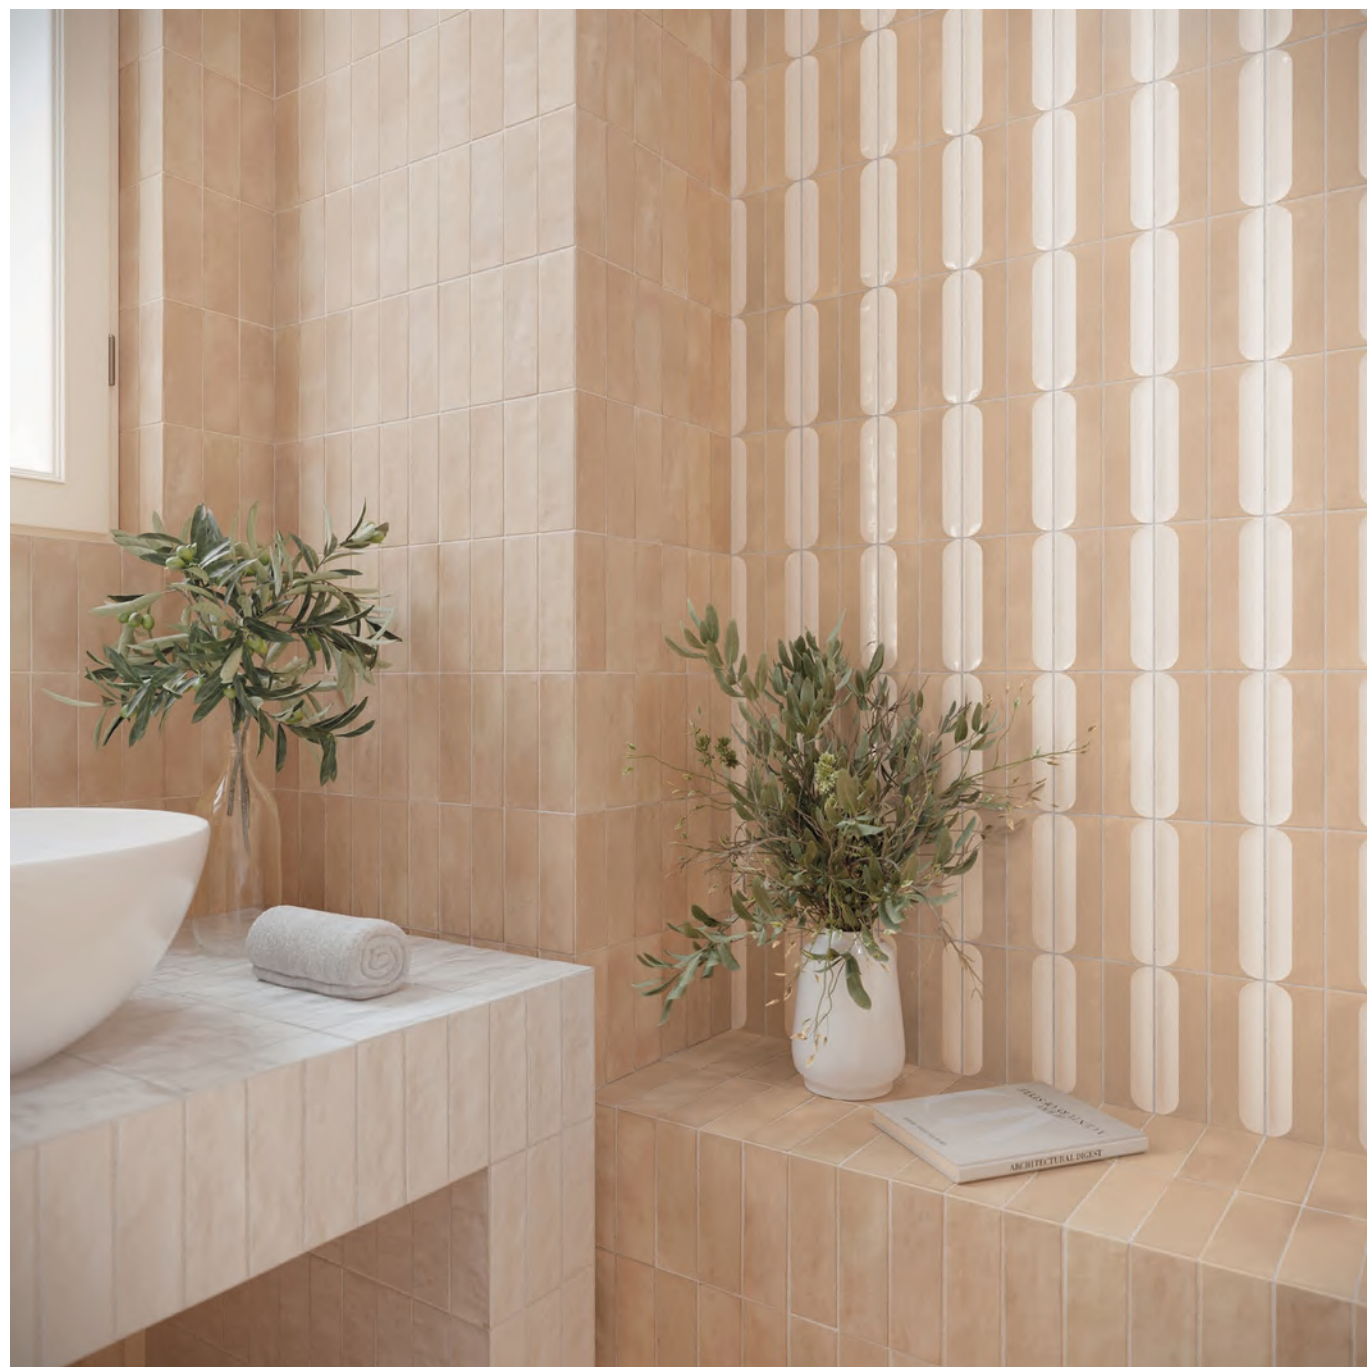


*Back Wall: **Curtsy Decor** Natural Wall: **Curtsy** Natural Vanity & Shower: **Curtsy** Off White Gloss
Floor: **Curtsy Square** Natural*



Shelf: **Curtsy** Natural
 Reception: **Curtsy** Natural 50% - **Curtsy Decor** Natural 50%
 Floor: **Curtsy Square** Natural



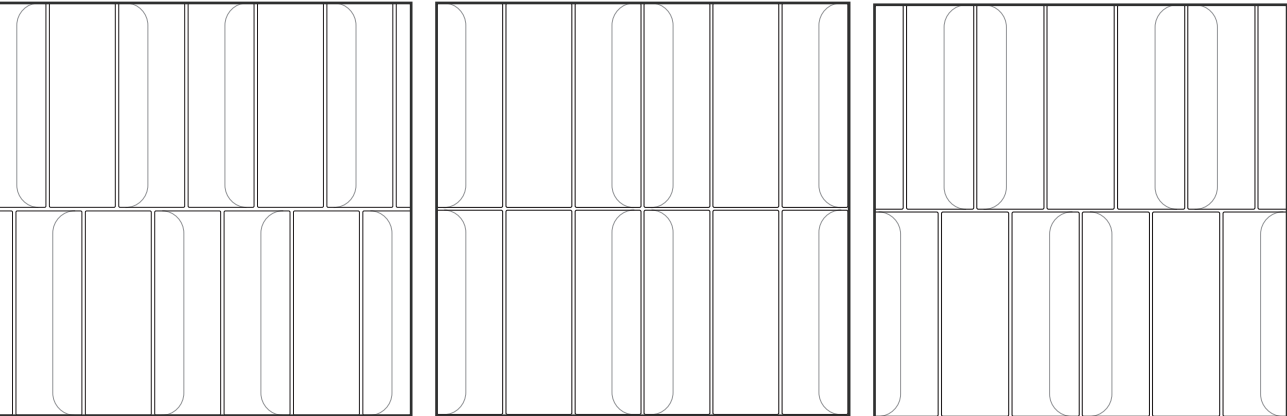


Curtsy 33,3% - Curtsy Decor 66,7%

Curtsy 33,3% - Curtsy Decor 66,7%

Curtsy 33,3% - Curtsy Decor 66,7%

Technical drawings - Dibujos técnicos

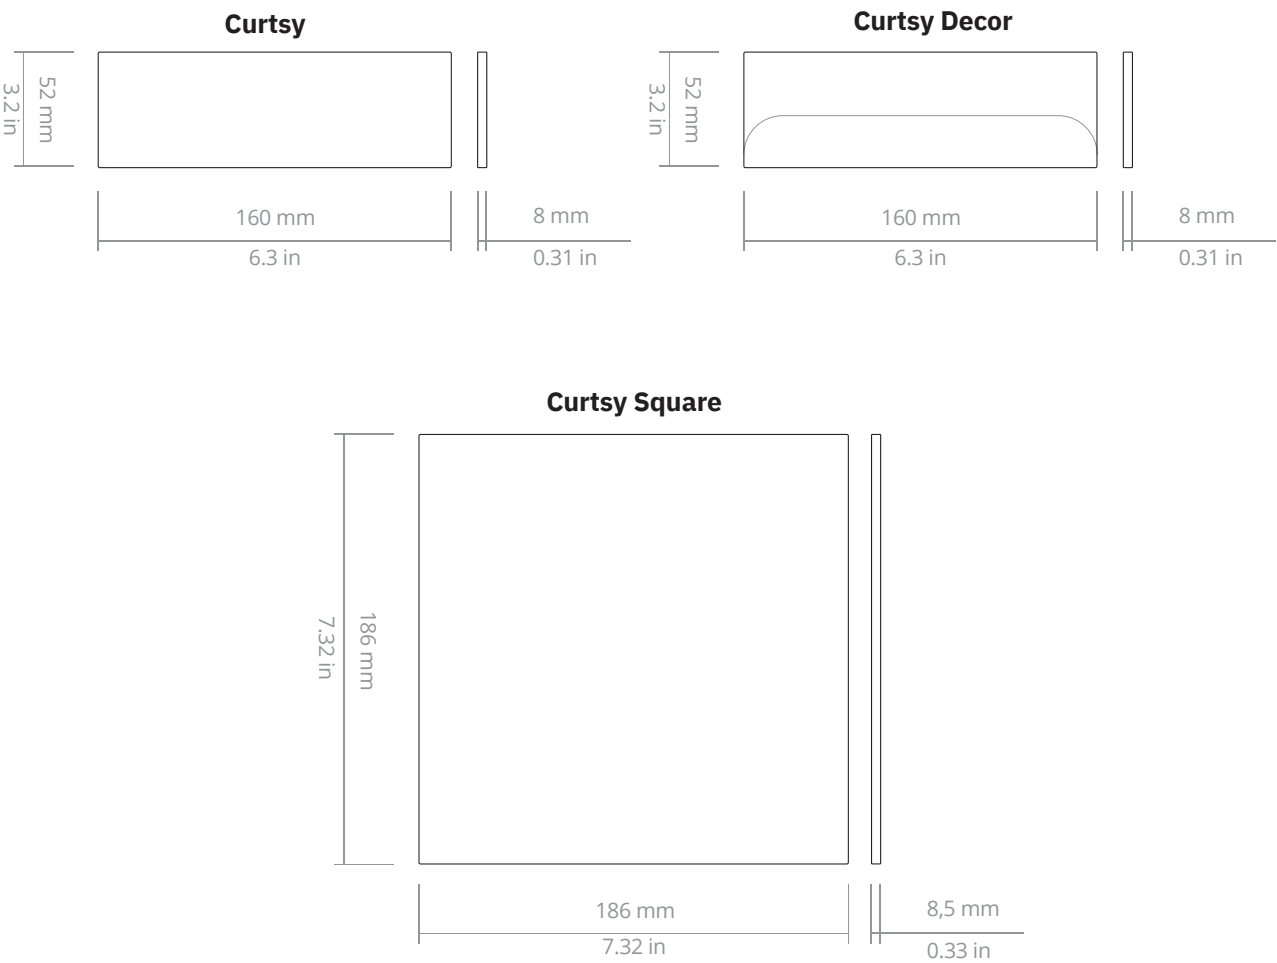

Dry-pressed porcelain tiles with water absorption B Ia ≤ 0,5% for interior and exterior floors and walls. Baldosas cerámicas prensadas en seco con absorción de agua B Ia ≤ 0,5% para suelos y paredes interiores y exteriores.		
FEATURES / CARACTERÍSTICAS	SPECIFICATION / ESPECIFICACIÓN	NORMA
 Dimensional Features	Curtsy: 52 ± 0,75 mm x 160 ± 0,8 mm x 8 mm ± 0,5 mm Curtsy SQUARE: 186 ± 1,1 mm x 186 ± 1,1 mm x 8,5 mm ± 0,5 mm	UNE-EN ISO 10545-2:2019
 Water absorption	Curtsy: E _b ≤ 0,5% Curtsy SQUARE: E _b >10%	UNE-EN ISO 10545-3:2018
 Modulus of rupture and breaking strength	Curtsy: ≥ 12 N/mm2 ≥ 600 N Curtsy SQUARE: Minimum 35 N/mm2 Individual Minimum 32 N/mm2	UNE-EN ISO 10545-4:2019
 Crazing resistance	Pass	UNE-EN ISO 10545-11:1997
 Household products resistance	GA	UNE-EN ISO 10545-13:2017
 Chemical resistance	GHA	UNE-EN ISO 10545-13:2017
 Stain resistance	>3	UNE-EN ISO 10545-14:2015
 Frost resistance	Pass	UNE-EN ISO 10545-11:1997
 Tone Variation	Curtsy SQUARE: PEI 2: Tobac PEI 3: Natural & Cotto	UNE-EN ISO 10545-7:1999
 Tone Variation	V3	-
 Porcelain body	Curtsy SQUARE	-
 White body	Curtsy	-

MODEL / MODELO	PRICE CODE / CODIGO TARIFA
Curtsy NATURAL, COTTO & TOBAC	D25
Curtsy SQUARE	D20
Curtsy DECOR	D28
Curtsy OFF WHITE GLOSS	D28
Curtsy ROUNDED EDGE	DS2

Packing

			KG 	M2 		M2 
Modelo	Formato (cm)	Piezas / Caja	Kg / Caja	m2 / Caja	Cajas / Palet	m2 / Palet
Curtsy	5,2x16 cm	85	9,18 kg	0,707 m²	100	71,200 m²
Curtsy SQUARE	18,5x18,5 cm	13	8,30 kg	0,447 m²	108	48,276 m²
Curtsy DECOR	5,2x16 cm	85	9,18 kg	0,707 m²	100	71,200 m²
Curtsy ROUNDED EDGE	1,1x16 cm	20	0,10 kg	3,190 m	429	1368,510 m

			LB 	SQ FT 		SQ FT 
Model	Format (in)	Pieces / Box	Lb / Box	sq ft / Box	Boxes / Pallet	sq ft / Pallet
Curtsy	2"x6.3"	85	21,24 lb	7,610 sq ft	100	766,390 sq ft
Curtsy SQUARE	7"x7"	13	18,29 lb	4,811 sq ft	108	519,639 sq ft
Curtsy DECOR	2"x6.3"	85	21,24 lb	7,610 sq ft	100	766,390 sq ft
Curtsy ROUNDED EDGE	0.43"x6.3"	20	0,22lb	10,467 ft	429	4489,862 ft

WAREHOUSING

In order to guarantee the characteristics of the finish the product must be kept in its original packaging until the time of fixing. If the product is likely to be stored for a long period of time it should be suitably covered.

TILE FIXING

To ensure the products adhere correctly to the surface, it is essential to use specific adhesive and grouting material. This must also be suitable for the environment they will have to withstand. Fitting with traditional mortars does not ensure good adhesion.

Due to the nature of the material there may be dimensional variations between pieces. Therefore, all types of joints must be planned and carried out correctly: structural, perimeter, expansion and installation joints. Fitting tiles without joints is not advisable from any technical point of view as this may lead to various problems.

MAINTENANCE AND CLEANING

Once the materials have been fitted, it is advisable to remove any remaining adhesive and grouting material by using a commercial descaling product designed especially, diluted with water. The descaling product must not remain in contact with the surface to be cleaned for more than 5 minutes.

As a general guideline, powder detergents should not be used, not wire wool or abrasive materials. Generally a sponge will be sufficient with warm water and liquid neutral soap. Then rinse with plenty of clean water.

ALMACENAMIENTO

Para garantizar las características de su acabado, el producto debe mantenerse en su embalaje original hasta el momento de la colocación. Si el producto va a permanecer almacenado durante un largo periodo es conveniente hacerlo bajo cubierta.

COLOCACIÓN

Para garantizar una buena adhesión al soporte es necesaria la utilización de materiales de agarre y de rejuntado adecuados al ambiente al que vayan a estar sometidos. La colocación con mortero tradicional no garantiza una buena adhesión.

Debido a la naturaleza del material pueden existir diferencias dimensionales entre piezas. Por ello deberán planificarse y ejecutarse correctamente todo tipo de juntas: estructurales, perimetrales, de dilatación y de colocación. La colocación sin juntas es desaconsejable desde cualquier punto de vista técnico, pudiéndose el origen de diversas patologías.

MANTENIMIENTO Y LIMPIEZA

Finalizada la puesta en obra se recomienda eliminar los restos de materiales de agarre y rejuntado con un desincrustante comercial diseñado expresamente para baldosas cerámicas, rebajado con agua, permaneciendo en contacto con la superficie a limpiar no más de 5 minutos.

Como norma general no deben utilizarse detergentes en polvo ni estropajos metálicos o abrasivos. Generalmente será suficiente con una esponja, agua tibia y un jabón líquido neutro. Posteriormente aclarar con abundante agua limpia.