



5x15 cm / 2"x6"
Wall tiles

Porcelain Body
8 colours

VIRA

Vira

“Vira” is a collection that celebrates transparency and the play of reflections. Its eight shades offer a universe of nuances, where each piece captures and transforms the atmosphere in a unique way.


The collection encourages exploring combinations that bring depth, subtlety and a contemporary character, creating spaces that seem to vibrate with movement and harmony.

A language of shapes and reflections that turns every surface into a visual experience.

“Vira” es una colección que celebra la transparencia y el juego de reflejos. Sus ocho tonos ofrecen un universo de matices, donde cada pieza captura y transforma el ambiente de manera única.

La colección invita a explorar combinaciones que aportan profundidad, sutileza y un carácter contemporáneo, creando espacios que parecen vibrar con movimiento y armonía.

Un lenguaje de formas y reflejos que convierte cada superficie en una experiencia visual.

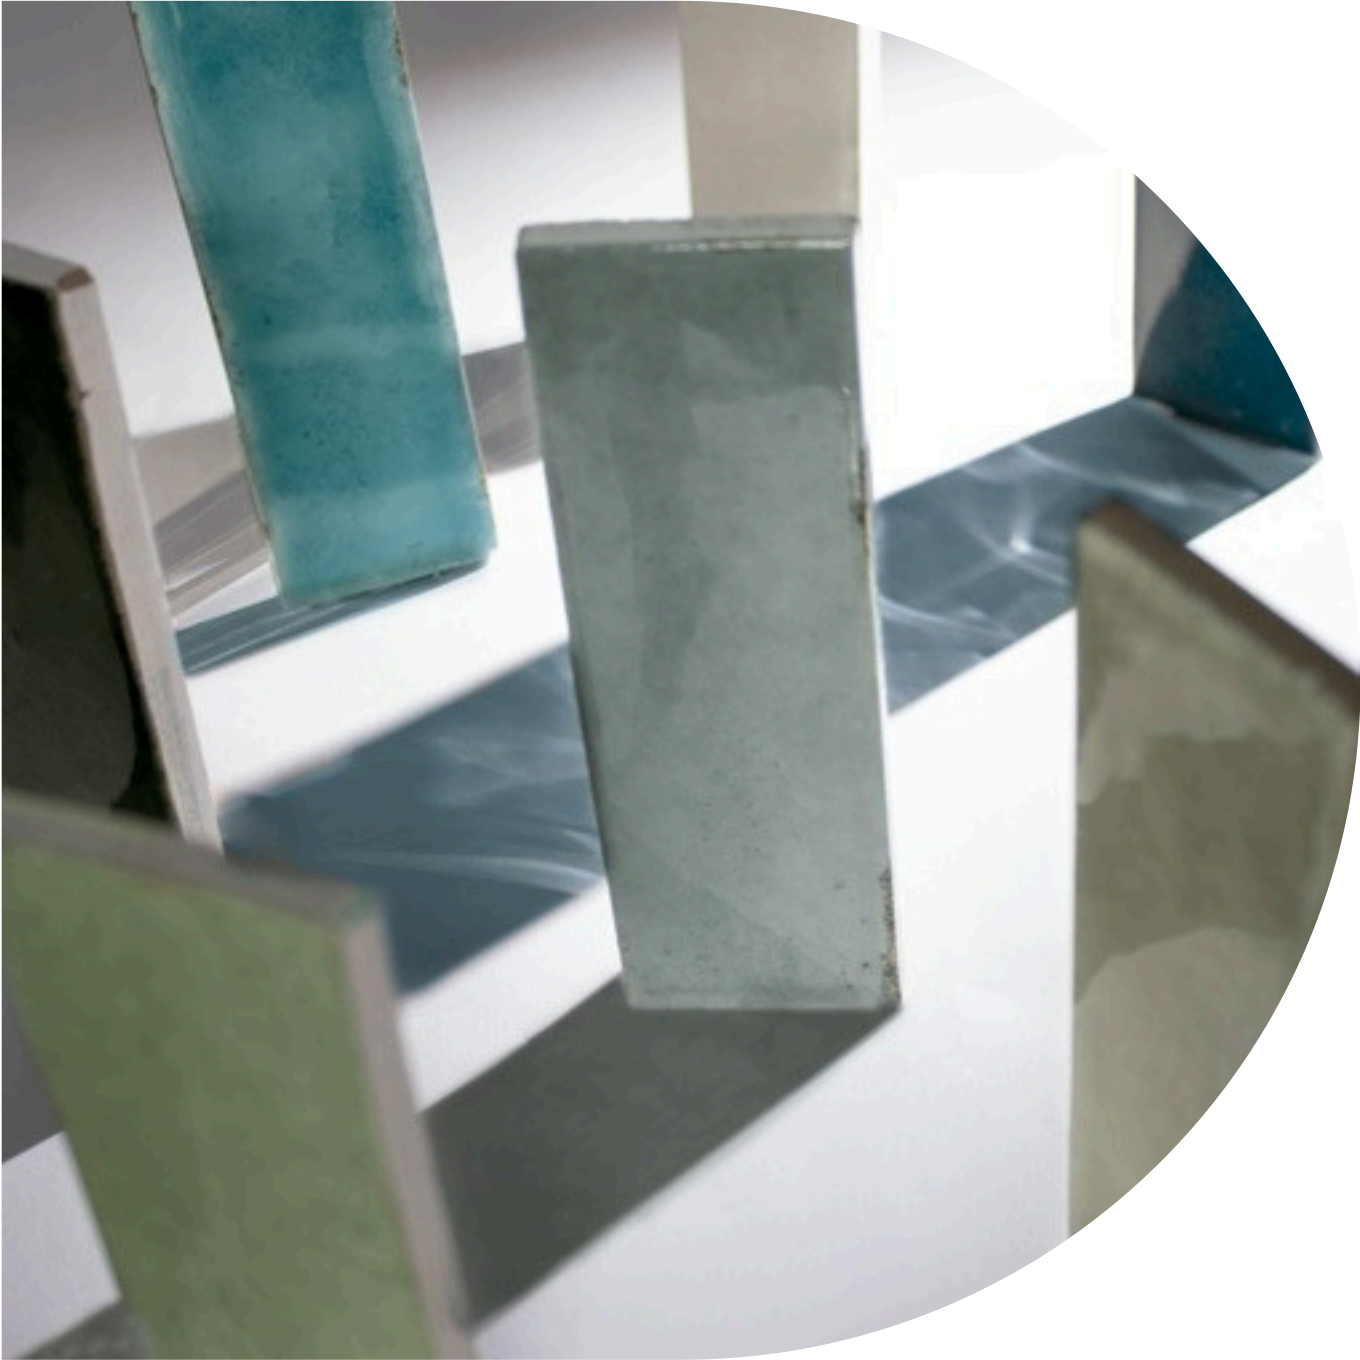

COLLECTION SUMMARY	pag. 5
<i>RESUMEN DE LA COLECCIÓN</i>	

APPLICATIONS	pag. 5
<i>USOS</i>	

GET INSPIRED	pag. 6
<i>INSPIRATE</i>	

TECHNICAL DRAWINGS	pag. 28
<i>DIBUJOS TÉCNICOS</i>	

LAYOUTS	pag. 28
<i>COLOCACIONES</i>	

TECHNICAL FEATURES	pag. 29
<i>CARACTERÍSTICAS TÉCNICAS</i>	

PRICE CODE	pag. 30
<i>CÓDIGO DE TARIFA</i>	

PACKING	pag. 30
---------	---------

RECOMENDATIONS	pag. 31
<i>RECOMENDACIONES</i>	



Collection summary - Resumen de la colección

Vira 5x15 cm / 2"x6" P \$ D31



Antique




Mushroom



Silver



Graphite



Jade



Evergreen



Aqua



Deep Blue

Vira ROUNDED EDGE 1,1x15 cm / 0.43"x6" W \$ DS2



* Available in all Vira colours.
* Disponible en todos los colores Vira.

Applications - Usos

Indoor / Interior	Outdoor / Exterior	Floor / Pavimento	Wall / Pared	Pool / Piscina	Non-slip / Antislip
					Class 0 <0,42



Vira Graphite - **Vira Rounded Edge** Graphite






Vira Jade



Vira Evergreen - Vira Rounded Edge
Evergreen
Floor: SquareNatural & Chalk (Clay collection)

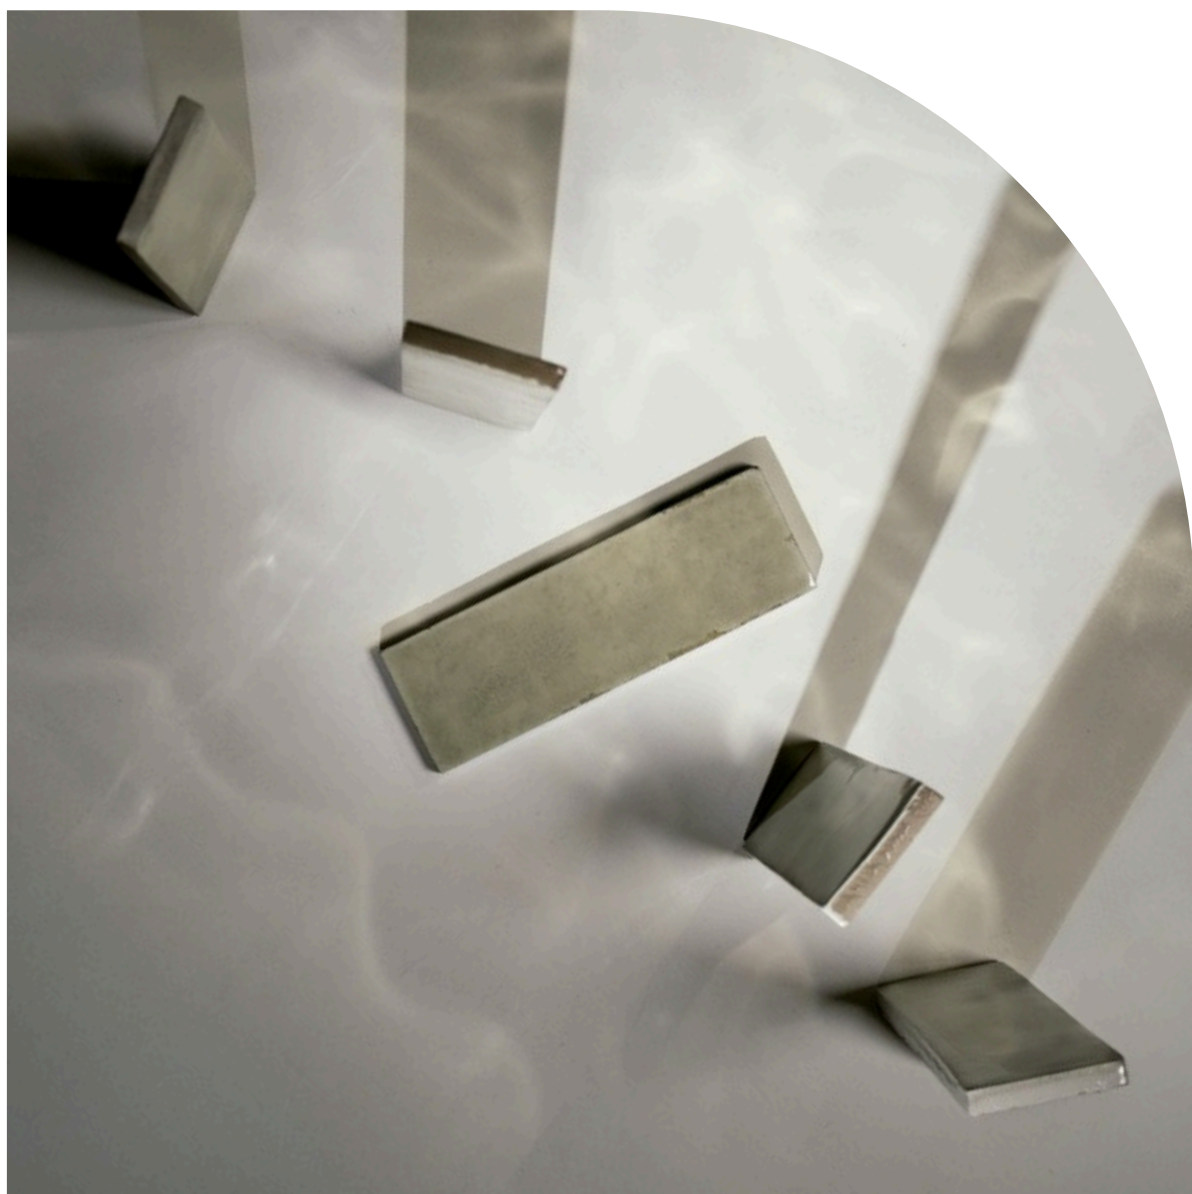

Vira Mushroom
Floor: Taupe (Limestone collection)



Vira Silver









Vira Aqua
Floor & Stairs: Natural & Square Natural (Clay collection)





Vira Jade



*Door & Table: **Vira** Antique 50% & Silver 50%*
*Wall: **Vira** Silver*
Floor: Square Natural (Clay collection)



Vira Antique & Deep Blue




Vira Deep Blue - Vira Rounded Edge Deep Blue
Floor: Graphite (Limestone collection)





Layouts - Colocaciones

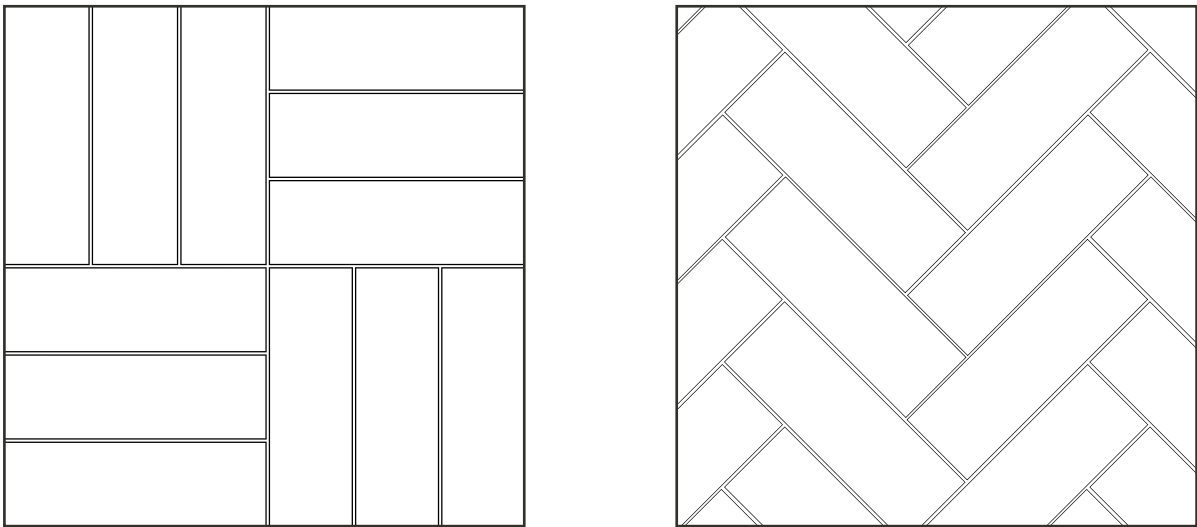

Dry-pressed porcelain tiles with water absorption B Ia ≤ 0,5% for interior and exterior floors and walls. Baldosas cerámicas prensadas en seco con absorción de agua B Ia ≤ 0,5% para suelos y paredes interiores y exteriores.			
FEATURES / CARACTERÍSTICAS	SPECIFICATION / ESPECIFICACIÓN		NORMA
 Dimensional Features	48 mm +/- 0,5 mm x 148 mm +/- 0,9 mm x 8,5 mm +/- 0,5 mm		UNE-EN ISO 10545-2:2019
 Water absorption	E _b ≤ 0,5%		UNE-EN ISO 10545-3:2018
 Modulus of rupture and breaking strength	Minimum 35 N/mm2 < Individual Minimum 32 N/mm2		UNE-EN ISO 10545-4:2019
 Crazeing resistance	Pass		UNE-EN ISO 10545-11:1997
 Household products resistance	GA		UNE-EN ISO 10545-13:2017
 Chemical resistance	GHA		UNE-EN ISO 10545-13:2017
 Stain resistance	>3		UNE-EN ISO 10545-14:2015
 Frost resistance	Pass		UNE-EN ISO 10545-11:1997
 Abrasive Resistance	PEI 5: Antique PEI 3: Mushroom & Jade PEI 2: Aqua, Silver, Deep Blue, Evergreen & Graphite		UNE-EN ISO 10545-7:1999
 Tone Variation	V3		-
 Porcelain Body	-		-

MODEL / MODELO	PRICE CODE / CODIGO TARIFA
Vira	D31
Vira ROUNDED EDGE	DS2

Packing

			KG 	M2 		M2 
Modelo	Formato (cm)	Piezas / Caja	Kg / Caja	m2 / Caja	Cajas / Palet	m2 / Palet
Vira	5x15 cm	78	10,62 kg	0,554 m²	75	41,55 m²
Vira ROUNDED EDGE	1,1x15 cm	20	0,41 kg	2,950 m	429	1265,550 m

			LB 	SQ FT 		SQ FT 
Model	Format (in)	Pieces / Box	Lb / Box	sq ft / Box	Boxes / Pallet	sq ft / Pallet
Vira	2"x6"	78	23.41 lb	5.963 sq ft	75	447.225 sq ft
Vira ROUNDED EDGE	0.43"x6"	20	0.90 lb	9.678 ft	429	4,151.862 ft

WAREHOUSING
In order to guarantee the characteristics of the finish the product must be kept in its original packaging until the time of fixing. If the product is likely to be stored for a long period of time it should be suitably covered.

TILE FIXING
To ensure the products adhere correctly to the surface, it is essential to use specific adhesive and grouting material. This must also be suitable for the environment they will have to withstand. Fitting with traditional mortars does not ensure good adhesion.

Due to the nature of the material there may be dimensional variations between pieces. Therefore , all types of joints must be planned and carried out correctly: structural, perimeter, expansion and installation joints. Fitting tiles without joints is not advisable from any technical point of view as this may lead to various problems.

MAINTENANCE AND CLEANING
Once the materials have been fitted, it is advisable to remove any remaining adhesive and grouting material by using a commercial descaling product designed especially, diluted with water . The descaling product must not remain in contact with the surface to be cleaned for more than 5 minutes.

As a general guideline, powder dertergents should not be used, not wire wool or abrasive materials. Generally a sponge will be sufficient with warm water and liquid neutral soap. Then rinse with plenty of clean water.

ALMACENAMIENTO
Para garantizar las características de su acabado, el producto debe mantenerse en su embalaje original hasta el momento de la colocación. Si el producto va a permanecer almacenado durante un largo periodo es conveniente hacerlo bajo cubierta.

COLOCACIÓN
Para garantizar una buena adhesión al soporte es necesaria la utilización de materiales de agarre y de rejuntado adecuados al ambiente al que vayan a estar sometidos. La colocación con mortero tradicional no garantiza una buena adhesión.

Debido a la naturaleza del material pueden existir diferencias dimensionales entre piezas. Por ello deberán planificarse y ejecutarse correctamente todo tipo de juntas: estructurales, perimetrales, de dilatación y de colocación. La colocación sin juntas es desaconsejable desde cualquier punto de vista técnico, pudiendo ser el origen de diversas patologías.

MANTENIMIENTO Y LIMPIEZA
Finalizada la puesta en obra se recomienda eliminar los restos de materiales de agarre y rejuntado con un desincrustante comercial diseñado expresamente para baldosas cerámicas, rebajado con agua, permaneciendo en contacto con la superficie a limpiar no más de 5 minutos.

Como norma general no deben utilizarse detergentes en polvo ni estropajos metálicos o abrasivos. Generalmente será suficiente con una esponja, agua tibia y un jabón líquido neutro. Posteriormente aclarar con abundante agua limpia.