

Mattonflex STANDARD

Coatingfor exterior andinterior, brickeffect, of good compactness,suitable for all those cases where it is necessarya waterproof and breathable coating as well as particularly resistant to weathering, impact and wear and which, with its thickness, hide slight imperfections of the plasters. It can be applied on civil plaster, prefabricated, cement agglomerates in general, mineral or synthetic shavings and old appropriately prepared and consolidated paints, polystyrene, wood and polystyrene with appropriate adhesives.

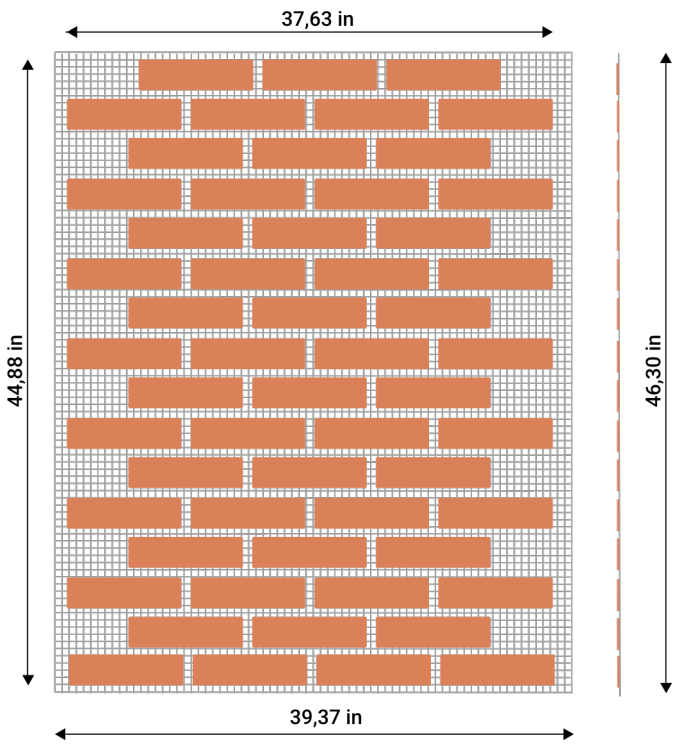

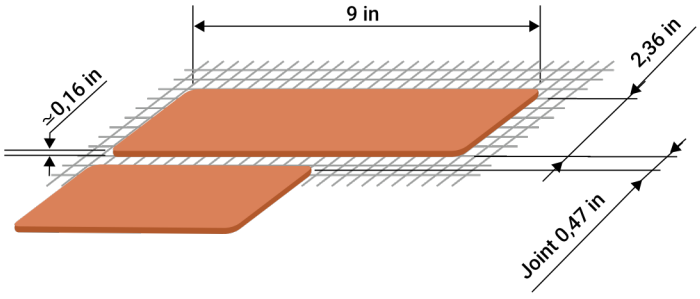

COMPOSITION

Acrylic, elastomeric copolymers in water dispersion, aggregates, minerals, water-repellent additivespigments.

STORAGE

In a room with a temperature between +41°F and +95°F.

T° APPLICATION

Not less than +41°F. Relative humidity not higher than 75% RH.

RESISTANCE

Excellent resistance to light and strong alkali and to badweather.

SURFACE PREPARATION

Remove moss, mold, dust and other impurities, repair any cracks and make surethat thesubstrate isdry andnot alkaline.

APPLICATION CYCLE

With a perfectly dry surface, apply a coat of glue using a stainless steel spatula according to the substrate to be treated, proceed with the application of the product and proceedwith the bondingof Mattonflex. Protect from rain for as long as necessary for drying. DO NOT apply the product at temperatures above +95°F or at temperatures below +41°F.

REACTION FIRE TEST

Fire Behaviour		Smoke Production			Flaming Droplets	
B	-	s	1	,	d	0

i.e. B – s1 , d0

Reaction to fire classification: B – s1, d0

WEIGHT:≃ 12,12 lb/sqm

Mattonflex® CE
il mattone flessibile | the flexible brick

Via Clemente Bausano 10, 10086
Rivarolo Canavese (TO) – P.I. 11803000014
Capitale sociale € 15.000,00 i.v.

Commerciale: +39 3477161218
Amministrazione: +39 3314400803

info@mattonflex.it
mattonflex.it