


# 45 MINUTE SCL CORE FIRE DOORS

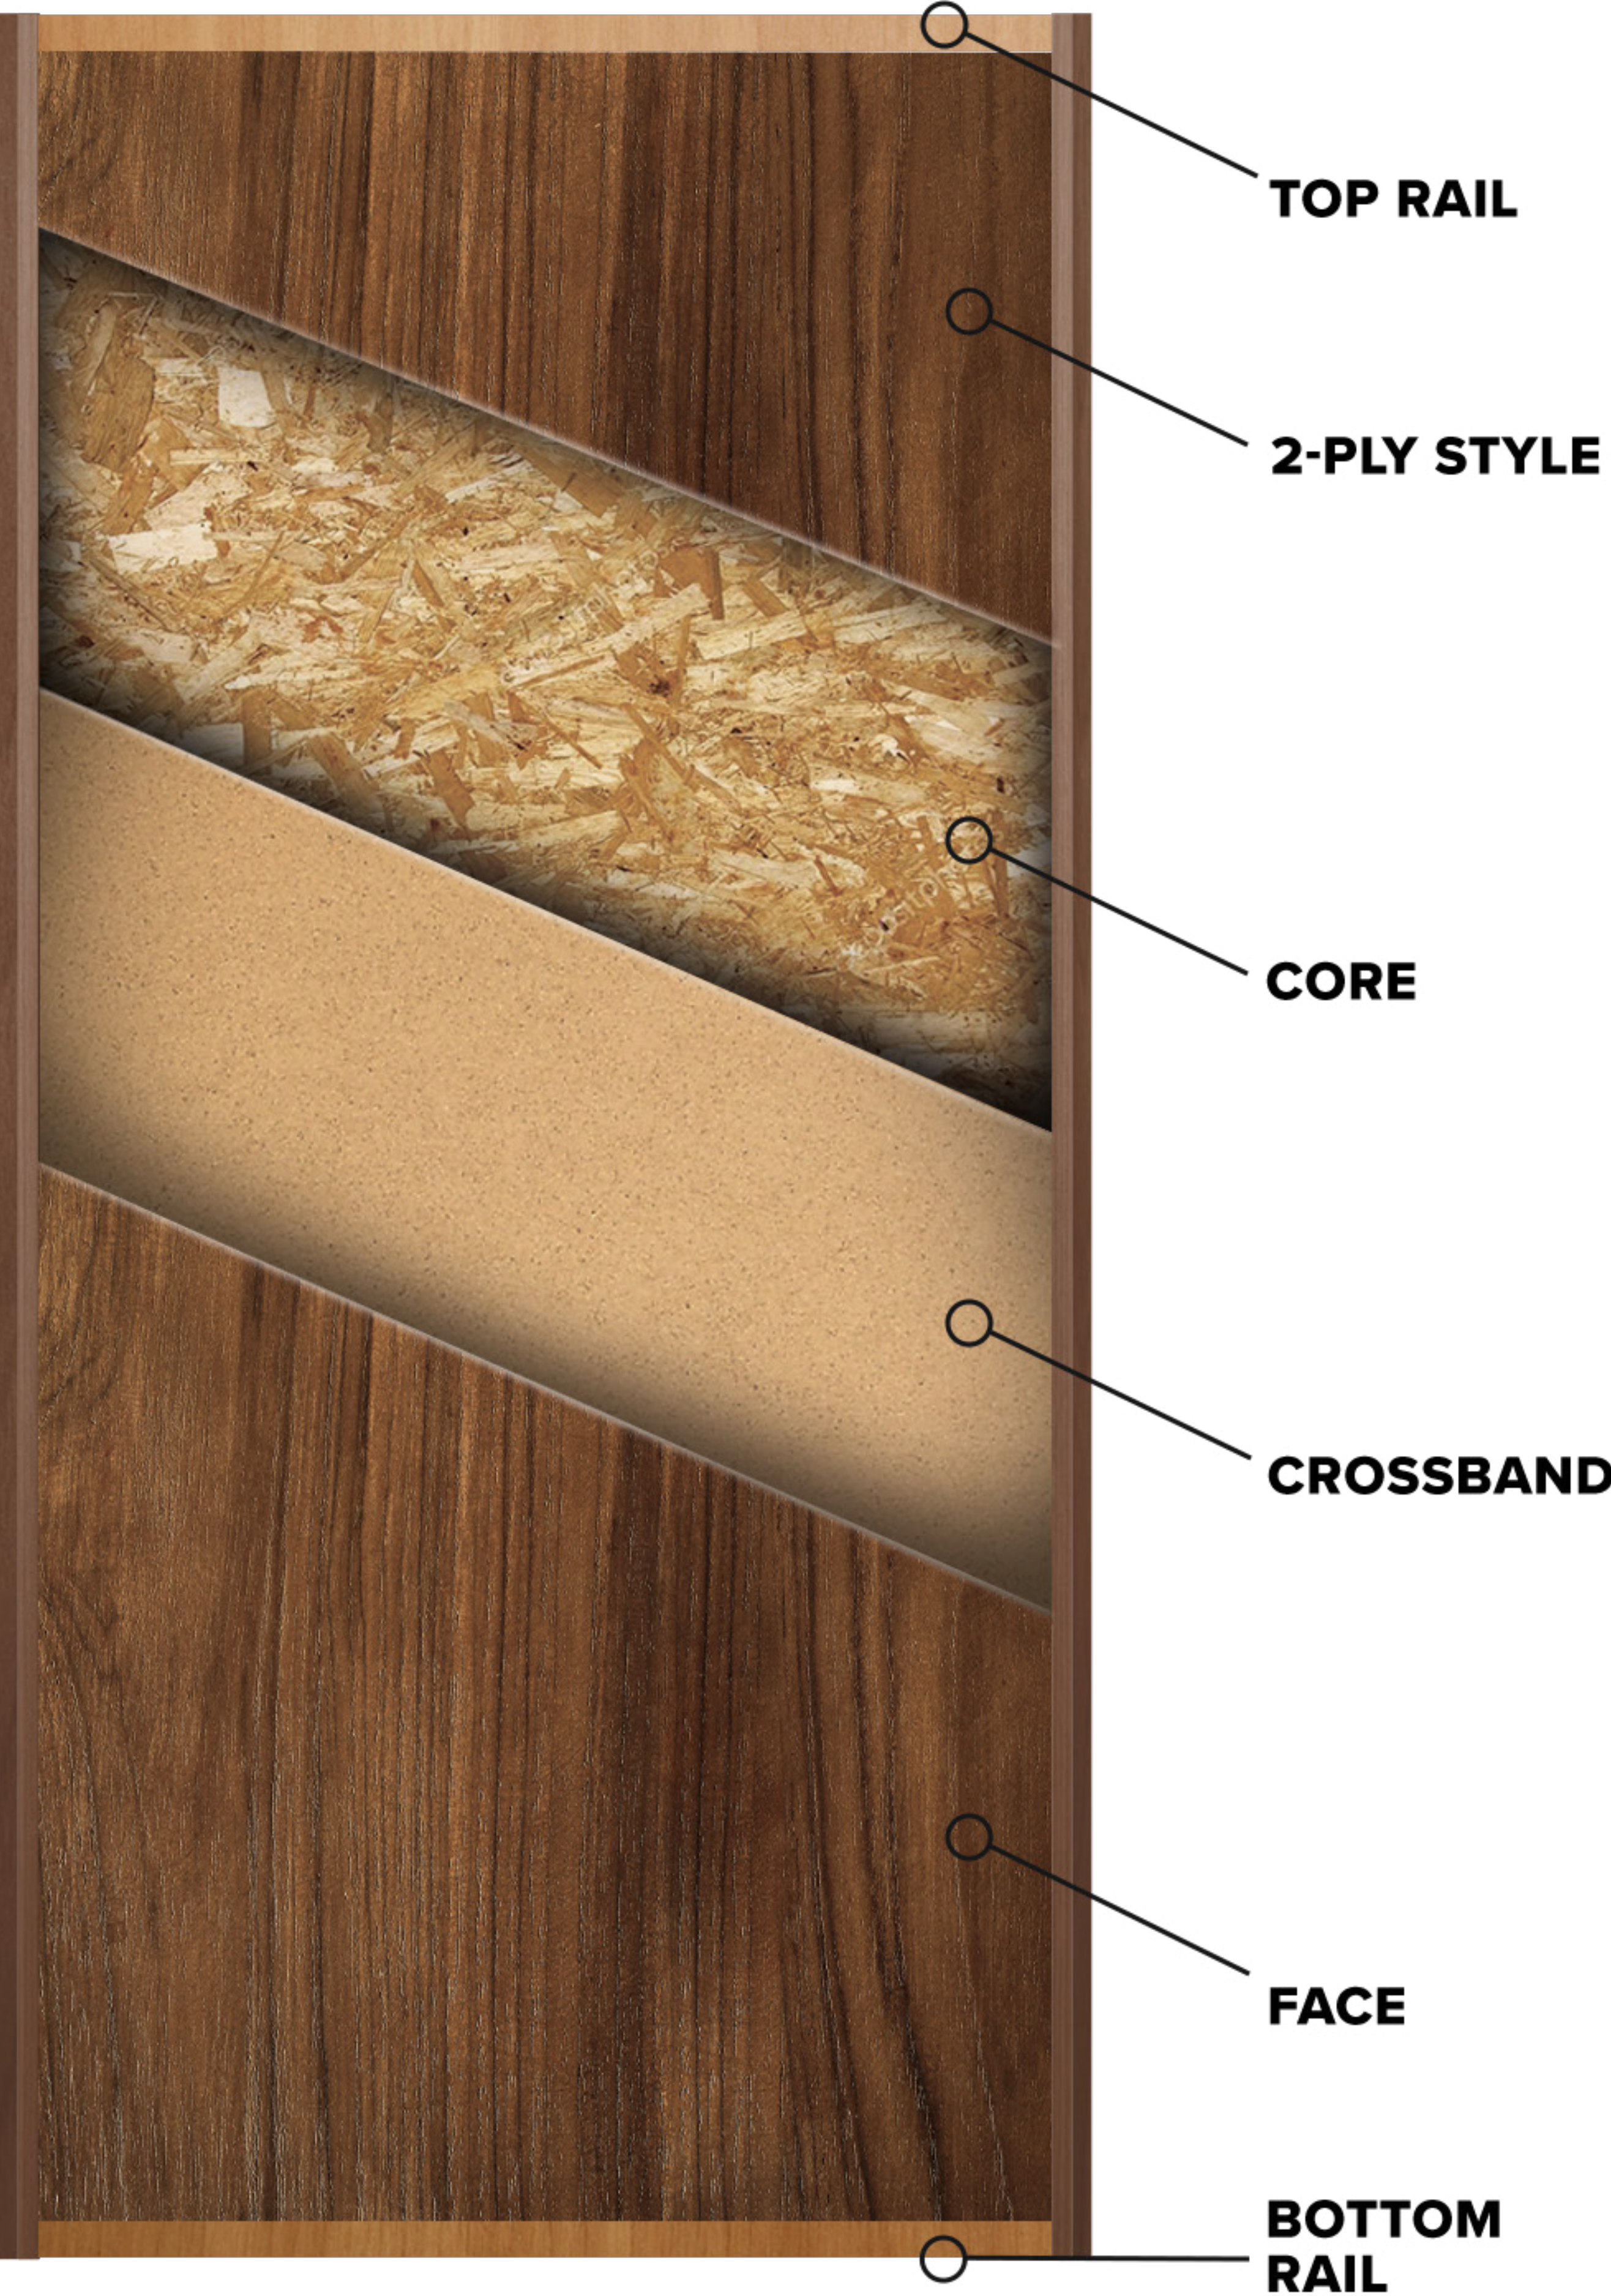

Colors & textures shown are representative, actual colors and textures may vary.

## SPECIFICATION DATA

Meets or exceeds WDMA, AWI and WI industry standards

Domestic & Exotic Veneer Species, Plastic Laminate, MDO and Hardboard Faces

Wood stiles matching face veneer standard

**Maximum Size:** 4' x 8' single swing

**Maximum lite size:** Please Inquire

**Finish:** Five standard colors, custom color and finish matching as requested

Hinges per NFPA No. 80

**Latch-set:** Cylindrical, 2 1/8" diameter max. or listed mortise

**Deadbolt:** Cylindrical up to 2 1/8" diameter max. or listed mortise

**Exit Device:** Listed, surface mounted with through bolts

**Viewer:** Per NFPA No. 80

## DESIGN FEATURES

Type:	Single swing
Regulatory Agency:	Labeled and certified by ITS/WHI
Reference Standards:	Meets or exceeds WDMA and AWI industry standards
Grade:	WDMA Custom (standard) or Premium Grade (upon specification)
Thickness:	1 3/4"
Construction:	Traditional 5-ply construction
Stiles:	Fire rated SCL or high density mineral with hardwood edges
Rails:	Fire rated SCL or high density mineral
Core:	Fire rated SCL core
Adhesive:	Thermally activated, Type I, (PVA) water resistant
Faces:	Domestic and exotic wood veneer, plastic laminate, and MDO
Finish:	Factory stain, lacquer or prime coat, according to AWI Finish Systems 1 through 8 available
Edge Protection:	Not required for single swing
Pre-fitting:	Factory pre-fitting available: 1/8" tolerance between top and edges
Machining:	Factory pre-machining available per finish hardware schedule requirements
Packaging:	Polyethylene slipsheets
Warranty:	(5) year standard warranty for interior use only
Positive Pressure:	Meets positive pressure requirements unless noted

