


45, 60, AND 90 MINUTE MINERAL CORE FIRE DOORS

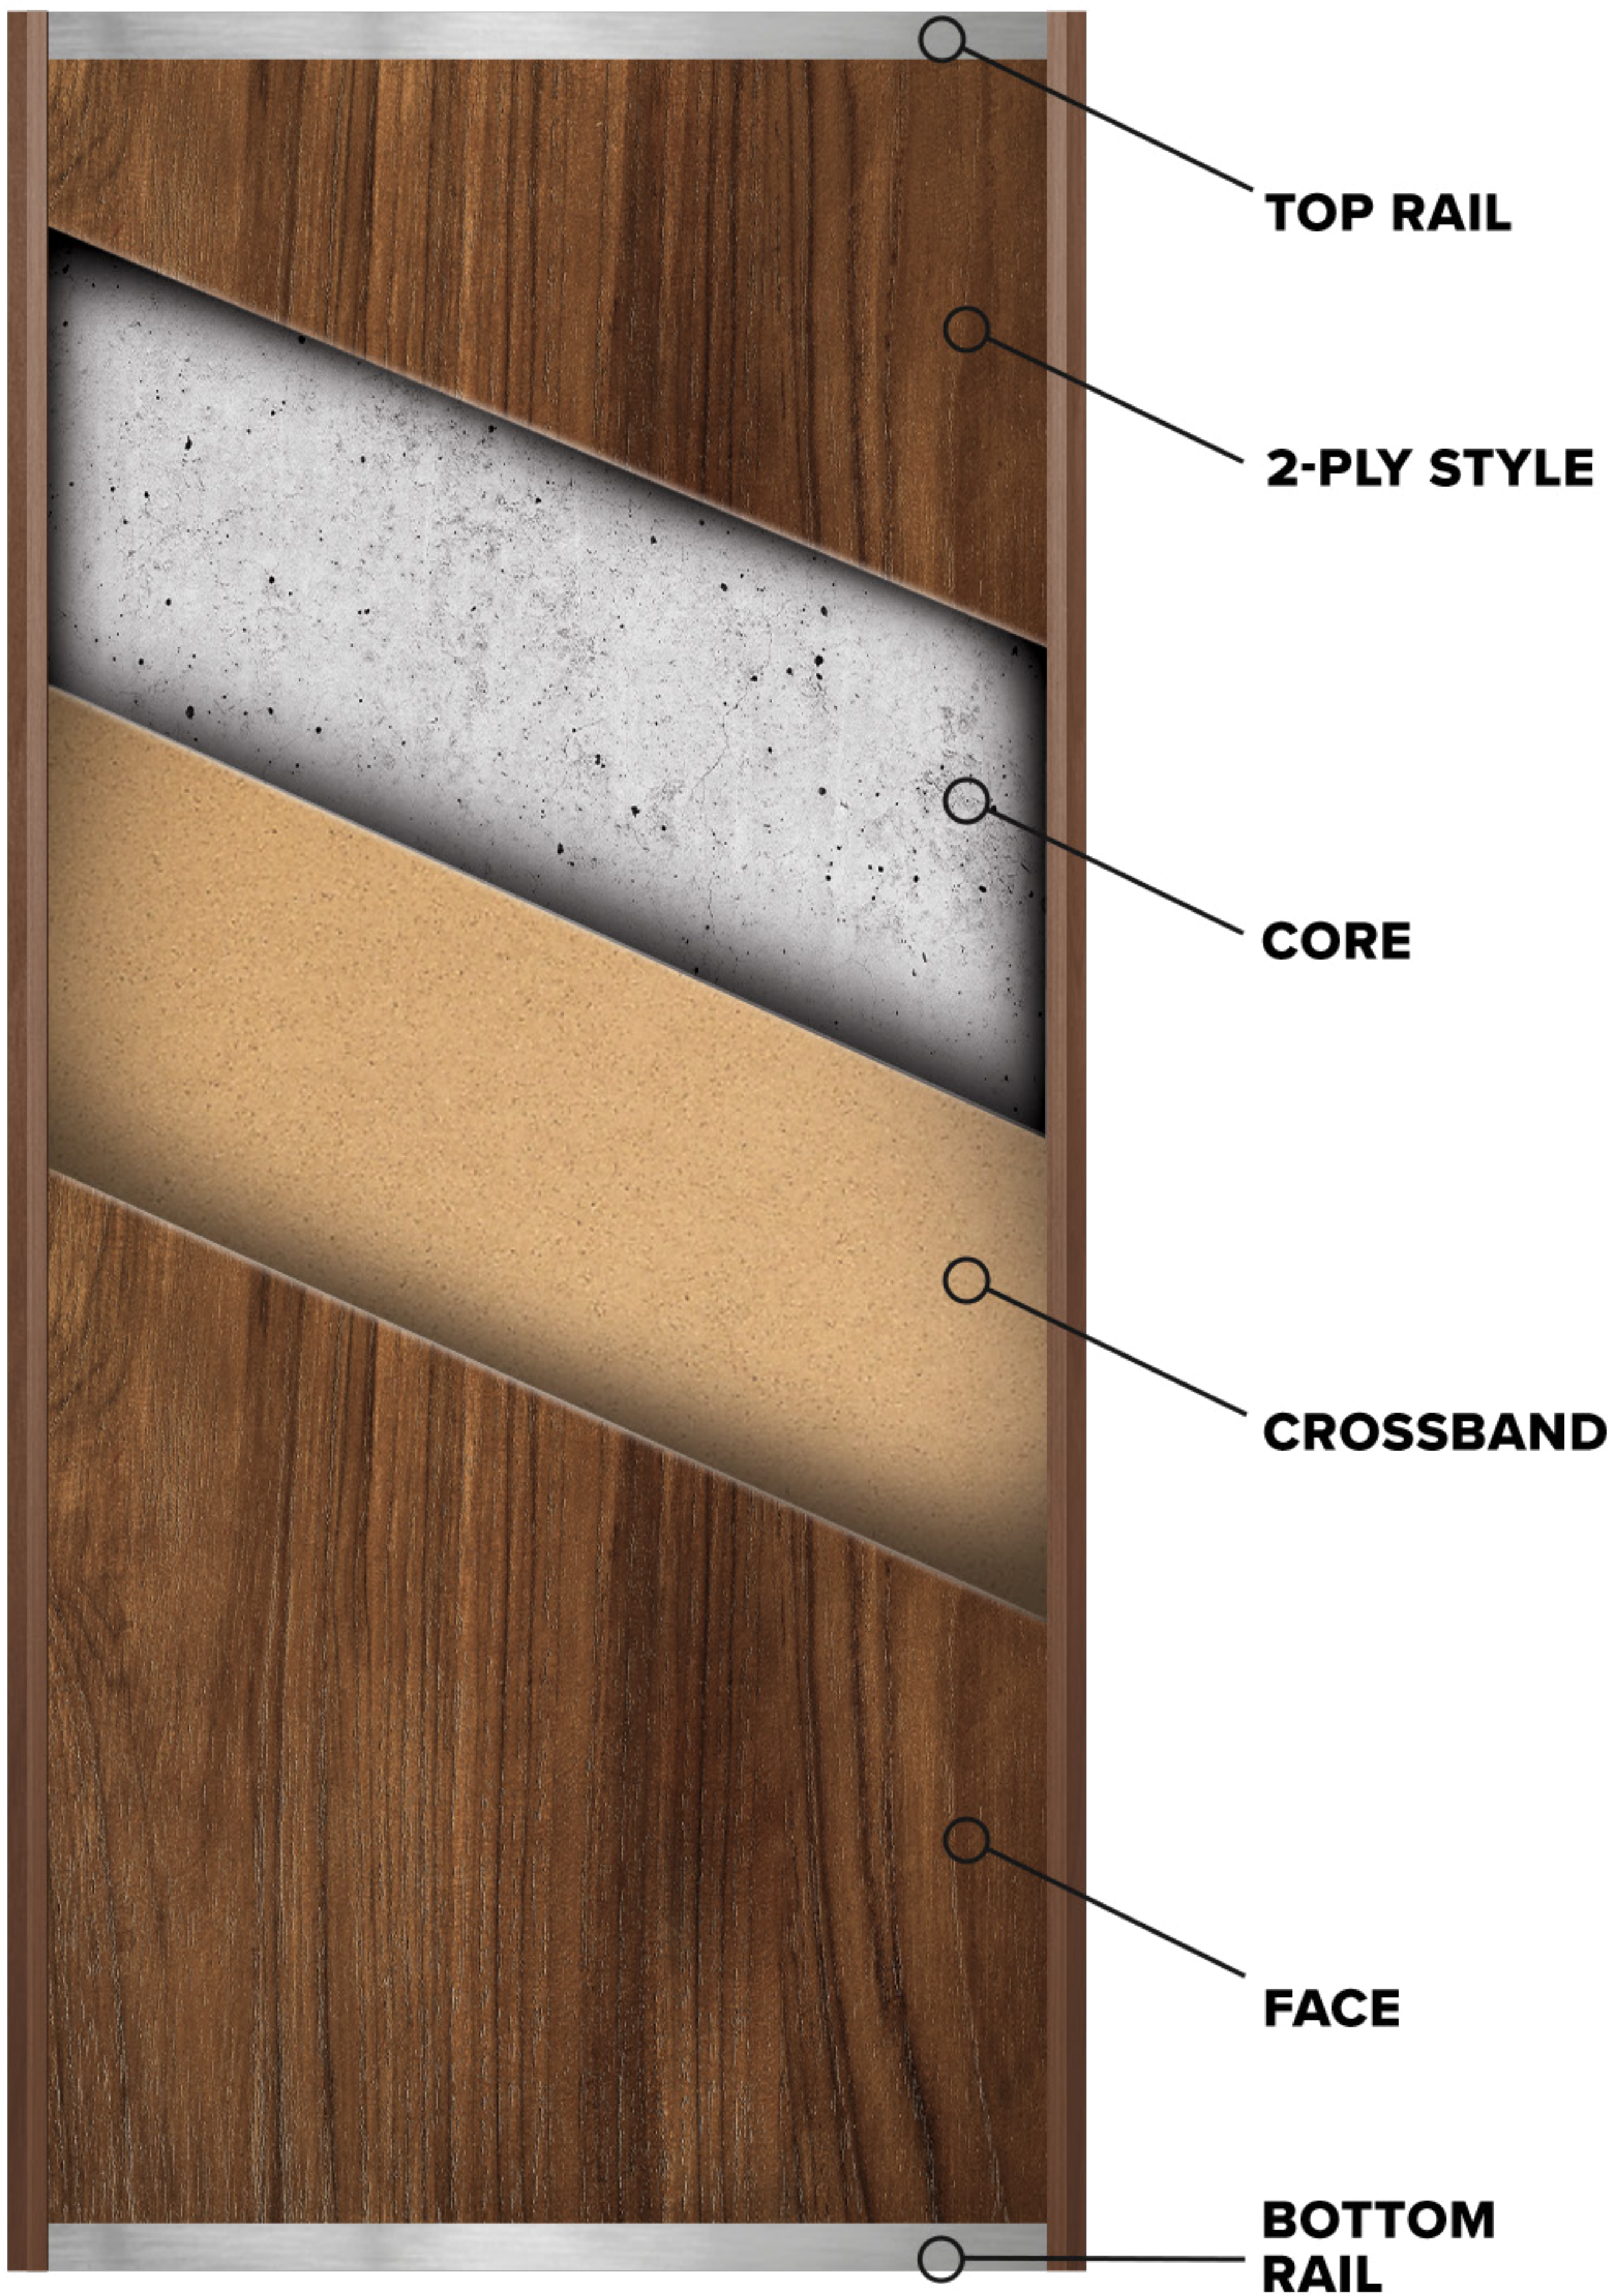

Colors & textures shown are representative, actual colors and textures may vary.

SPECIFICATION DATA

Meets or exceeds WDMA, AWI and WI industry standards

Domestic & Exotic Veneer Species, Plastic Laminate, and MOO

Wood or veneer stiles matching face veneer standard

Maximum Size: 4' x 9' single swing and 8' x 9' swinging pairs—Call for positive pressure sizes

Maximum lite size: Please inquire

Finish: Five standard colors, custom color and finish matching as requested

Hinges per NFPA No. 80

Latchset: Listed single point latch or listed mortise

Deadbolt: Per NFPA No. 80

Flushbolts: Per NFPA No. 80

Exit Device: Per NFPA No. 80

Viewer: Per NFPA No. 80

DESIGN FEATURES

Type:	Single swing and swinging pair
Regulatory Agency:	Labeled and certified by ITS/WHI
Reference Standards:	Meets or exceeds ASTM E-152, UL 10C, NFPA 252 and UBC 43-2 industry standards
Grade:	WDMA (Custom) or Premium Grade upon specification
Thickness:	1 3/4"
Construction:	Traditional 5-ply construction
Stiles:	High density composite materials
Rails:	High density composite materials
Core:	Mineral core, WHI listed custom blocking for hardware attachment available
Adhesive:	Thermally activated, Type I, (PVA) water resistant
Faces:	Domestic and exotic wood veneer, plastic laminate, and MDO
Finish:	Factory stain, lacquer, or prime coat according to AWI Finish Systems 1 through 8 available
Edge Protection:	Not required for single swing
Pre-fitting:	Factory pre-fitting available: 1/8" tolerance between top, edges and meeting edges of pairs
Machining:	Factory pre-machining available per finish hardware schedule requirements
Packaging:	Polyethylene slipsheets
Warranty:	(5) year standard warranty for interior use only
Positive Pressure:	Meets positive pressure requirements, unless noted

